



**Art.-Nr: AGD009-E**

**Exit sign Centralised power supply systems**

**Recessed mounting, Without monitoring, CPS, 50m, IP40,  
Zinc die-cast, Stainless steel**

Modern zinc die-cast emergency exit sign luminaire for surface mounting on the ceiling. Escape and emergency routes can be identified on either one or two sides.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Two requested pictograms (arrow to the right, left, up, down or white) are supplied as standard.



More information  
[www.rp-group.com/en/item/AGD009-E](http://www.rp-group.com/en/item/AGD009-E)



## TECHNICAL DATA


| Luminaire type         | Exit sign                        |
|------------------------|----------------------------------|
| Mounting               | Recessed mounting                |
| Recognition distance   | 50m                              |
| Pictograph             | acc. to Specification            |
| Illuminant             | LED                              |
| Housing material       | Zinc die-cast                    |
| Housing color          | Stainless steel                  |
| Protection type (IP)   | IP40                             |
| Impact resistance (IK) | ≥ 3                              |
| Certification          | WEEE, CE                         |
| Insulation class       | 2                                |
| Supply                 | Centralised power supply systems |
| Monitoring             | Without monitoring               |
| Bridging time          | CPS                              |
| Battery                | /                                |
| Operating mode         | Permanent circuit                |
| Input voltageAC        | 230 V                            |
| Input frequency        | 50 / 60 Hz                       |



|                          |                     |
|--------------------------|---------------------|
| Input voltage DC         | 100-254 V           |
| Power max.               | 5,2 W               |
| Power DS                 | 5,2 W               |
| Power BS                 | 0 W                 |
| Ambient temperature DS   | -5 °C - 40 °C       |
| Ambient temperature BS   | -5 °C - 40 °C       |
| Depth                    | 80 mm               |
| Width                    | 517 mm              |
| Height                   | 330 mm              |
| Weight                   | 2.64                |
| Weight incl. packaging   | 3.29                |
| Connection cross-section | 1.5 mm <sup>2</sup> |
| Switching input          | No                  |
| Emergency light blocking | No                  |
| Battery connection       | No                  |
| Dimming function         | No                  |
| Customs tariff number    | 94056180            |
| EAN                      | 4260659565251       |



## TECHNICAL DRAWING

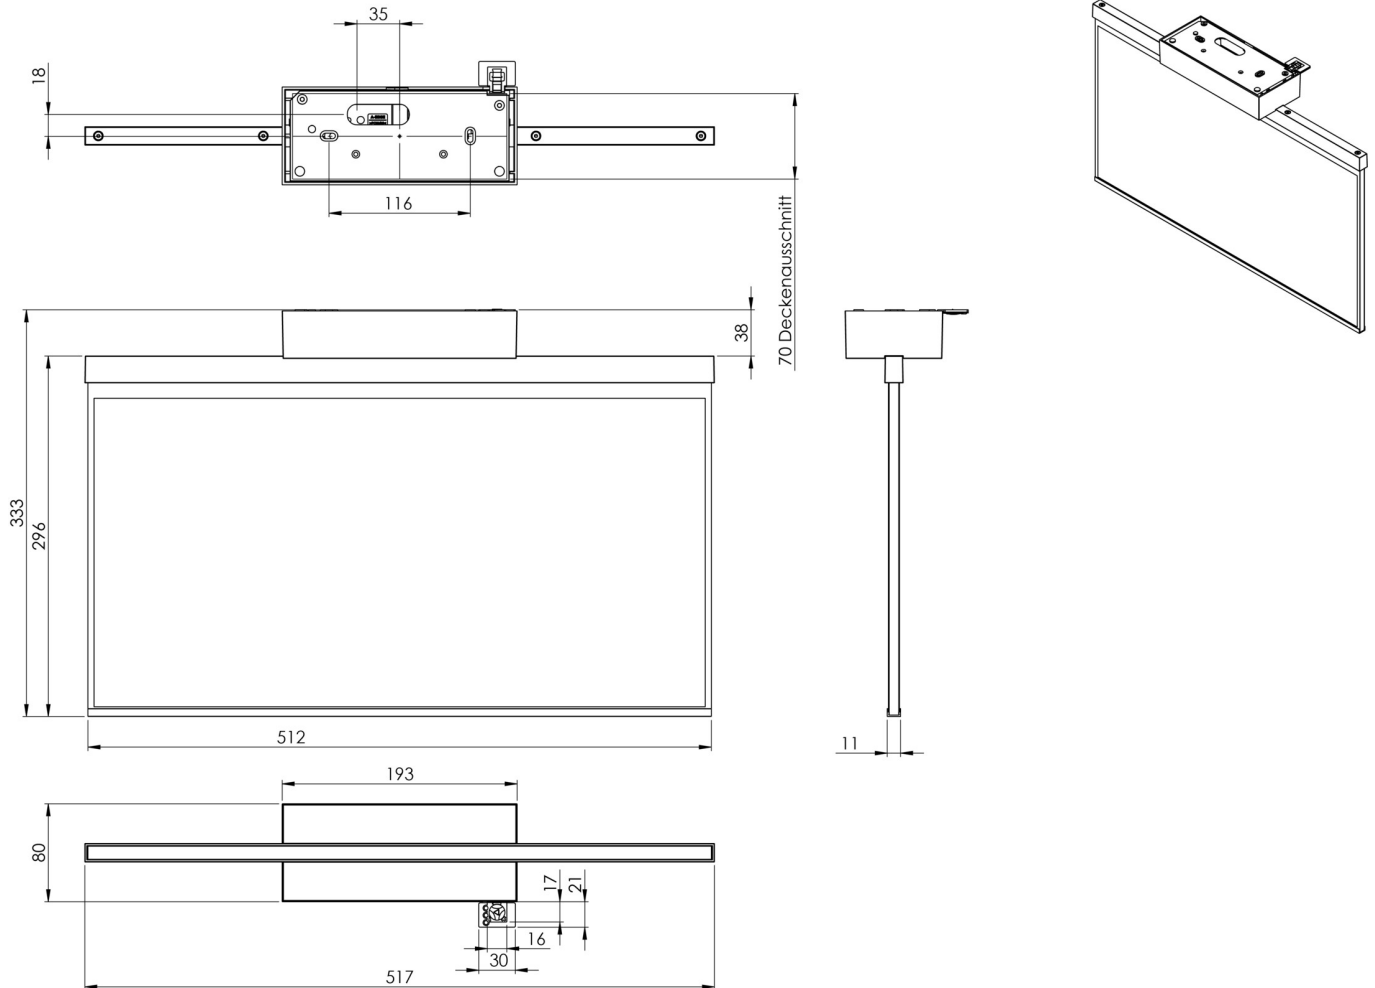

## ACCESSORY LIST

AM-X-APA-E -

As of: 11.10.2024 - Subject to technical changes and errors.