



**Art.-Nr: AGR009ML-AZ**

**Utgangsskilt lys sentral strømforsyning**

**Veggmontering, ML, sentral strømforsyning, 50m, IP40,**

**Sinkstøping, antrasitt**

The AGR is a zinc-diecast exit sign for recessed wall mounting and for the marking of escape routes. It is part of a complete luminaire series, which features solutions for every mounting situation and was honored with the German Design Award. Luminaires of the A-Series are equipped with modern LED illuminants and offer flexibility with changeable pictograms.

LED exit sign according to EN 60598-1, EN 60598-2-22, EN 7010 and EN 1838



Mer informasjon



## TEKNISKE DATA


|                     |                         |
|---------------------|-------------------------|
| Type armatur        | Utgangsskilt lys        |
| Monteringstype      | Veggmontering           |
| Deteksjonsområde    | 50m                     |
| piktogram           | Individuelt n.a         |
| Lyspærer            | LED                     |
| Koffertmateriale    | Sinkstøping             |
| Farge på huset      | antrasitt               |
| IP-beskyttelse)     | IP40                    |
| Slagstyrke (IK)     | ≥ 3                     |
| Sertifisering       | Søppeltømming, CE       |
| beskyttelses klasse | 2                       |
| omsorg              | sentral strømforsyning  |
| overvåkning         | ML                      |
| Brotid              | sentral strømforsyning  |
| Driftsmodus         | Individuell lysveksling |
| Inngangsspenning AC | 230 V                   |
| Inngangsfrekvens    | 50/60 Hz                |
| Inngangsspenning DC | 216 V                   |
| Maks effekt.        | 6,1 W                   |
| Ytelse DS           | 6,1 W                   |



|                           |                     |
|---------------------------|---------------------|
| Ytelse BS                 | 1,1 W               |
| dybde                     | 73 mm               |
| Bredde                    | 517 mm              |
| Høyde                     | 296 mm              |
| Installasjonslengde       | 176 mm              |
| Installasjonsbredde       | 68 mm               |
| Installasjonshøyde        | 40 mm               |
| Vekt                      | 2.52                |
| Vekt inkludert emballasje | 3.17                |
| Tverrsnitt for tilkobling | 2.5 mm <sup>2</sup> |
| Koblingsinngang           | Ja                  |
| Blokkering av nødlys      | Nei                 |
| Batteritilkobling         | Nei                 |
| Dimmefunksjon             | Ja                  |
| Tolltariffnummer          | 94056180            |
| Opprinnelsesland          | DEUTSCHLAND         |
| EAN                       | 4260659565800       |



## TEKNISK TEGNING

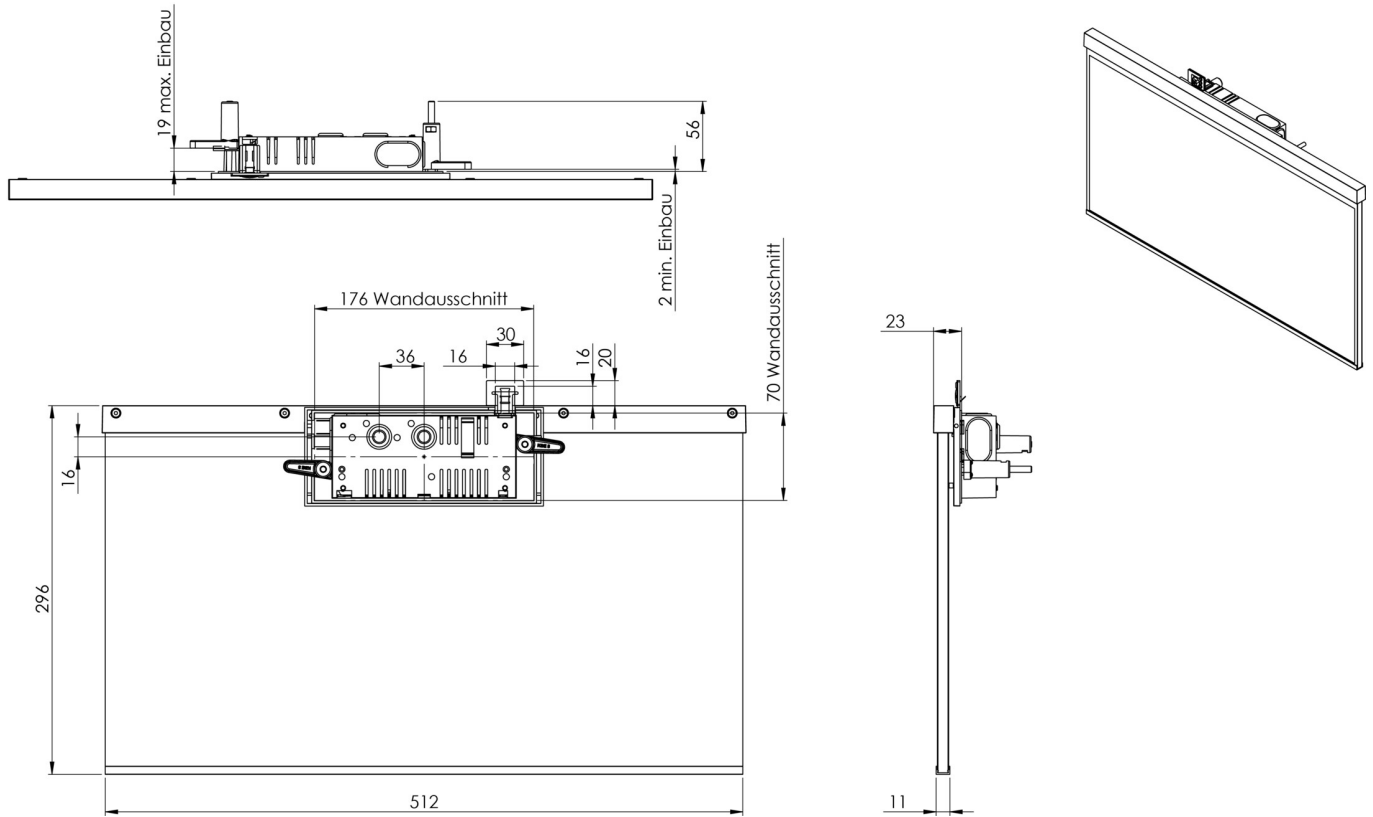



## LIGNENDE PRODUKTER

| Varenr.    | Bilde | overvåkning | omsorg                 | Farge | investering | Automatisk inspeksjonsbok | Vedlikeholdsinnsett | fjernvedlikehold | maks. lys              | Individuell lysovervåking |
|------------|-------|-------------|------------------------|-------|-------------|---------------------------|---------------------|------------------|------------------------|---------------------------|
| AGR009ML   |       | ML          | Sentral strømforsyning |       | €€€         | Ja                        | lav                 | Ja               | 1920 kroner per system | sentralt                  |
| AGR009ML-E |       | ML          | Sentral strømforsyning |       | €€€         | Ja                        | lav                 | Ja               | 1920 kroner per system | sentralt                  |

Fra: 27.06.2024 - Det tas forbehold om tekniske endringer og feil.