



Art.-Nr: AGR009ML-E
Exit sign Central power supply
Recessed wall mounting, ML, Central power supply, 50m,
IP40, Zinc die-cast, Stainless steel

The AGR is a zinc-diecast exit sign for recessed wall mounting and for the marking of escape routes. It is part of a complete luminaire series, which features solutions for every mounting situation and was honored with the German Design Award. Luminaires of the A-Series are equipped with modern LED illuminants and offer flexibility with changeable pictograms.

LED exit sign according to EN 60598-1, EN 60598-2-22, EN 7010 and EN 1838



[More information](#)



TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Recessed wall mounting
Recognition distance	50m
Pictograph	acc. to Specification
Illuminant	LED
Housing material	Zinc die-cast
Housing color	Stainless steel
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	Waste disposal, CE
Insulation class	2
Supply	Central power supply
Monitoring	ML
Bridging time	Central power supply
Operating mode	single luminaire switching
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	216 V
Power max.	6,1 W
Power DS	6,1 W



Power BS	1,1 W
Depth	73 mm
Width	517 mm
Height	296 mm
Installation length	176 mm
Installation width	68 mm
Installation height	40 mm
Weight	2.52
Weight incl. packaging	3.17
Connection cross-section	2.5 mm ²
Switching input	Yes
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Customs tariff number	94056180
Country of origin	DEUTSCHLAND
EAN	4260659565817



TECHNICAL DRAWING

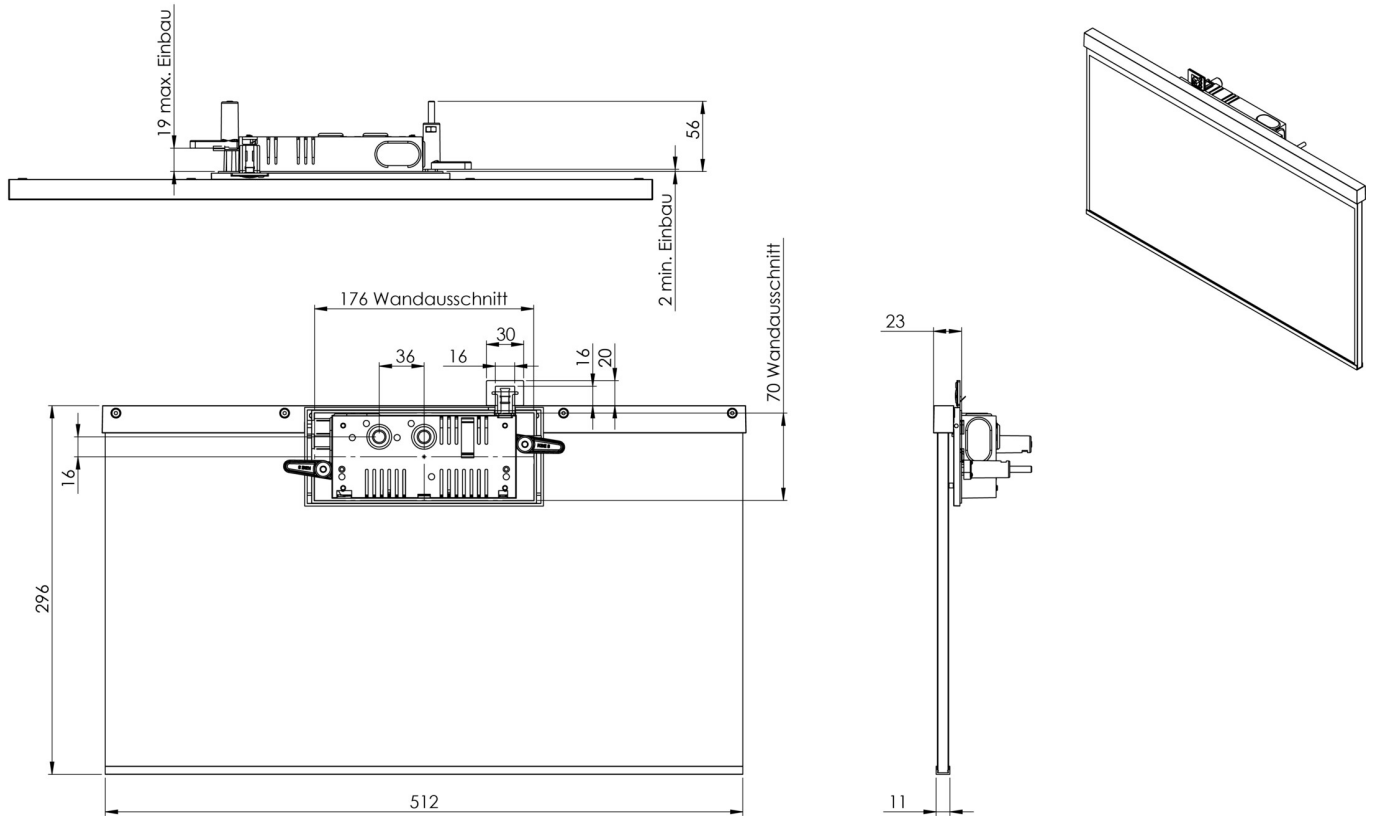



RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
AGR009ML		ML	Central power supply		€€€	Yes	low	Yes	1,920 per system	central
AGR009ML-AZ		ML	Central power supply		€€€	Yes	low	Yes	1,920 per system	central

As of: 27.06.2024 - Subject to technical changes and errors.