



**Art.-Nr: AIEP403SC-E**

**Exit sign**

**Ceiling mounting, SelfControl, 3 h, 15 m, IP20, Zinc die-cast, Stainless steel**

The AIEP is a zinc-diecast exit sign with pendent fitting for recessed ceiling mounting and for the marking of escape routes. It is part of a complete luminaire series, which features solutions for every mounting situation and was honored with the German Design Award. Luminaires of the A-Series are equipped with modern LED illuminants and offer flexibility with changeable pictograms.

LED exit sign according to EN 60598-1, EN 60598-2-22, EN 7010 and EN 1838



More information




**TECHNICAL DATA**

|                        |                                                                            |
|------------------------|----------------------------------------------------------------------------|
| Luminaire type         | Exit sign                                                                  |
| Mounting               | Ceiling mounting                                                           |
| Recognition distance   | 15 m                                                                       |
| Pictograph             | Set                                                                        |
| Illuminant             | LED                                                                        |
| Housing material       | Zinc die-cast                                                              |
| Housing color          | Stainless steel                                                            |
| Protection type (IP)   | IP20                                                                       |
| Impact resistance (IK) | ≥ 3                                                                        |
| Certification          | WEEE, CE                                                                   |
| Insulation class       | 2                                                                          |
| Monitoring             | SelfControl                                                                |
| Bridging time          | 3 h                                                                        |
| Battery                | LiFePO4 - 2 pcs - 3,2 V / 1200mAh LiFePO4 - Lithium Iron Phosphate Battery |
| Power max.             | 3,5 W                                                                      |
| Power DS               | 2,6 W                                                                      |
| Power BS               | 0,9 W                                                                      |
| Ambient temperature DS | -5 °C - 40 °C                                                              |
| Ambient temperature BS | -5 °C - 40 °C                                                              |
| Depth                  | 92 mm                                                                      |



|                                  |               |
|----------------------------------|---------------|
| Width                            | 167 mm        |
| Height                           | 259 mm        |
| Installation dimensions Diameter | 68 mm         |
| Weight                           | 0.85          |
| Weight incl. packaging           | 1.1           |
| Customs tariff number            | 94056180      |
| EAN                              | 4260766554322 |

## TECHNICAL DRAWING

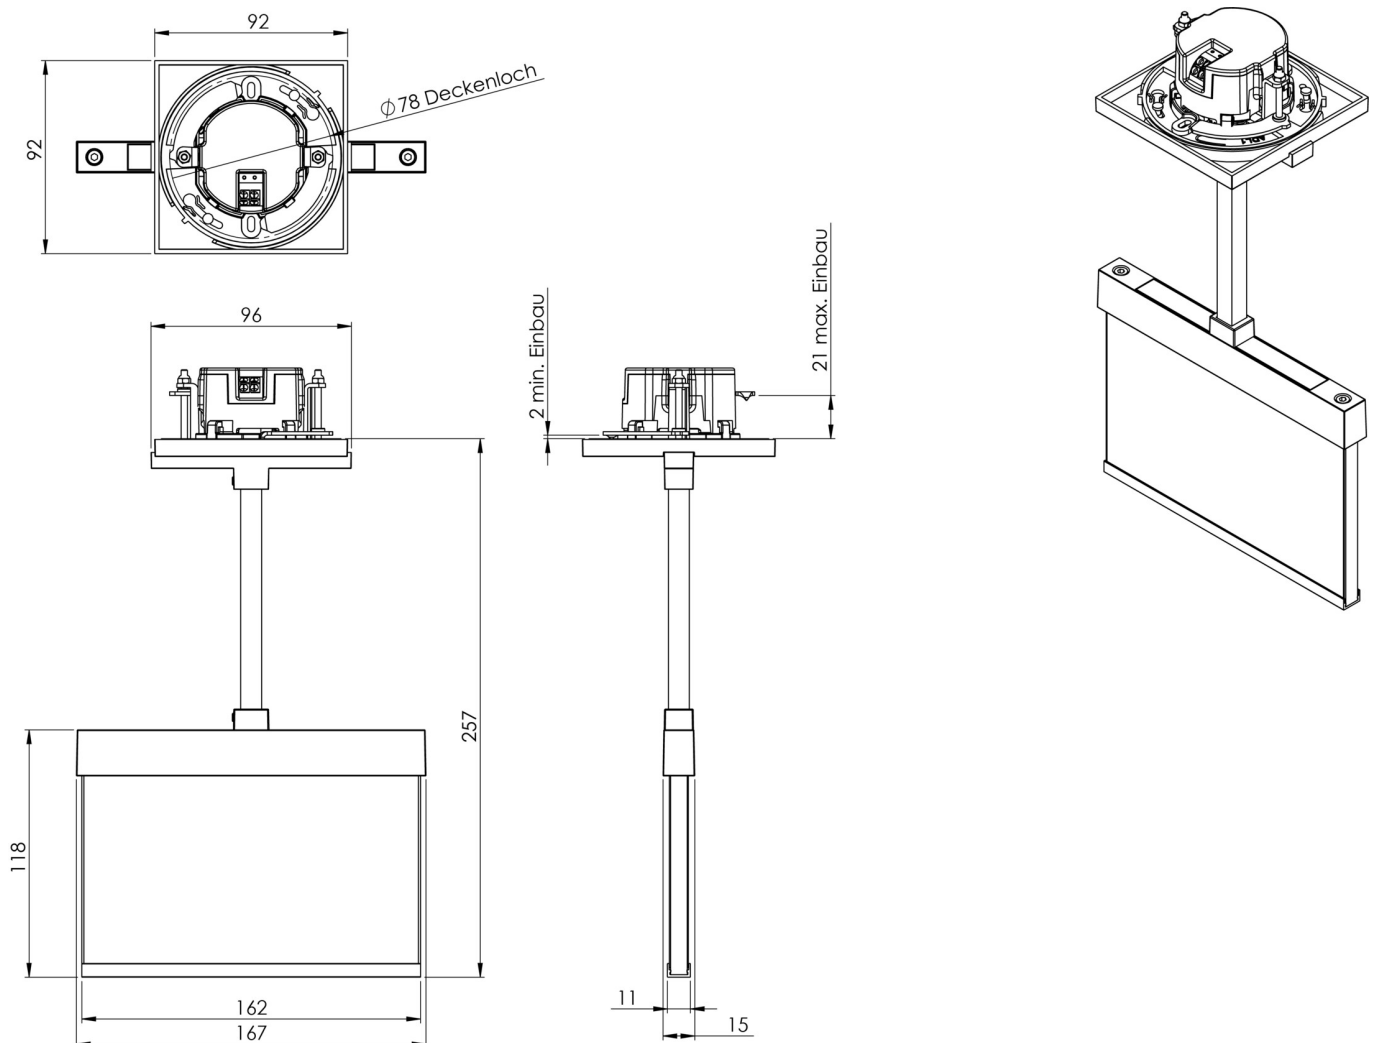



## ACCESSORY LIST

AM-X-PKG -

As of: 10.07.2024 - Subject to technical changes and errors.