



**Art.-Nr: AMR408WL-AZ**  
**Exit sign Single Battery**  
**Recessed wall mounting, Wireless Professional, 8 h, 22 m,**  
**IP40, Zinc die-cast, Anthracite**

The AMR is a zinc-diecast exit sign for recessed wall mounting and for the marking of escape routes. It is part of a complete luminaire series, which features solutions for every mounting situation and was honored with the German Design Award. Luminaires of the A-Series are equipped with modern LED illuminants and offer flexibility with changeable pictograms.

LED exit sign according to EN 60598-1, EN 60598-2-22, EN 7010 and EN 1838



More information



## TECHNICAL DATA


|                        |   |
|------------------------|---|
| Luminaire type         | Exit sign   |
| Mounting               | Recessed wall mounting  |
| Recognition distance   | 22 m  |
| Pictograph             | Set   |
| Illuminant             | LED   |
| Housing material       | Zinc die-cast   |
| Housing color          | Anthracite  |
| Protection type (IP)   | IP40  |
| Impact resistance (IK) | ≥ 3   |
| Certification          | WEEE, CE, ENEC  |
| Insulation class       | 2   |
| Supply                 | Single Battery  |
| Monitoring             | Wireless Professional   |
| Bridging time          | 8 h   |
| Battery                | LiFePO4 - 2 pcs - 3,2 V /1200mAh LiFePO4 - Lithium Iron Phosphate Battery |
| Operating mode         | Standby circuit / permanent circuit                                       |
| Input voltageAC        | 230 V   |
| Input frequency        | 50 Hz   |
| Power max.             | 4,7 W   |
| Power DS               | 3,5 W   |



|                          |                     |
|--------------------------|---------------------|
| Power BS                 | 0,8 W               |
| Depth                    | 79 mm               |
| Width                    | 236 mm              |
| Height                   | 151 mm              |
| Installation length      | 176 mm              |
| Installation width       | 68 mm               |
| Installation height      | 40 mm               |
| Weight                   | 1.17                |
| Weight incl. packaging   | 1.53                |
| Connection cross-section | 2.5 mm <sup>2</sup> |
| Switching input          | Yes                 |
| Emergency light blocking | Yes                 |
| Battery connection       | Connector           |
| Dimming function         | Yes                 |
| Customs tariff number    | 94056180            |
| Country of origin        | DEUTSCHLAND         |
| EAN                      | 4260682141378       |



## TECHNICAL DRAWING

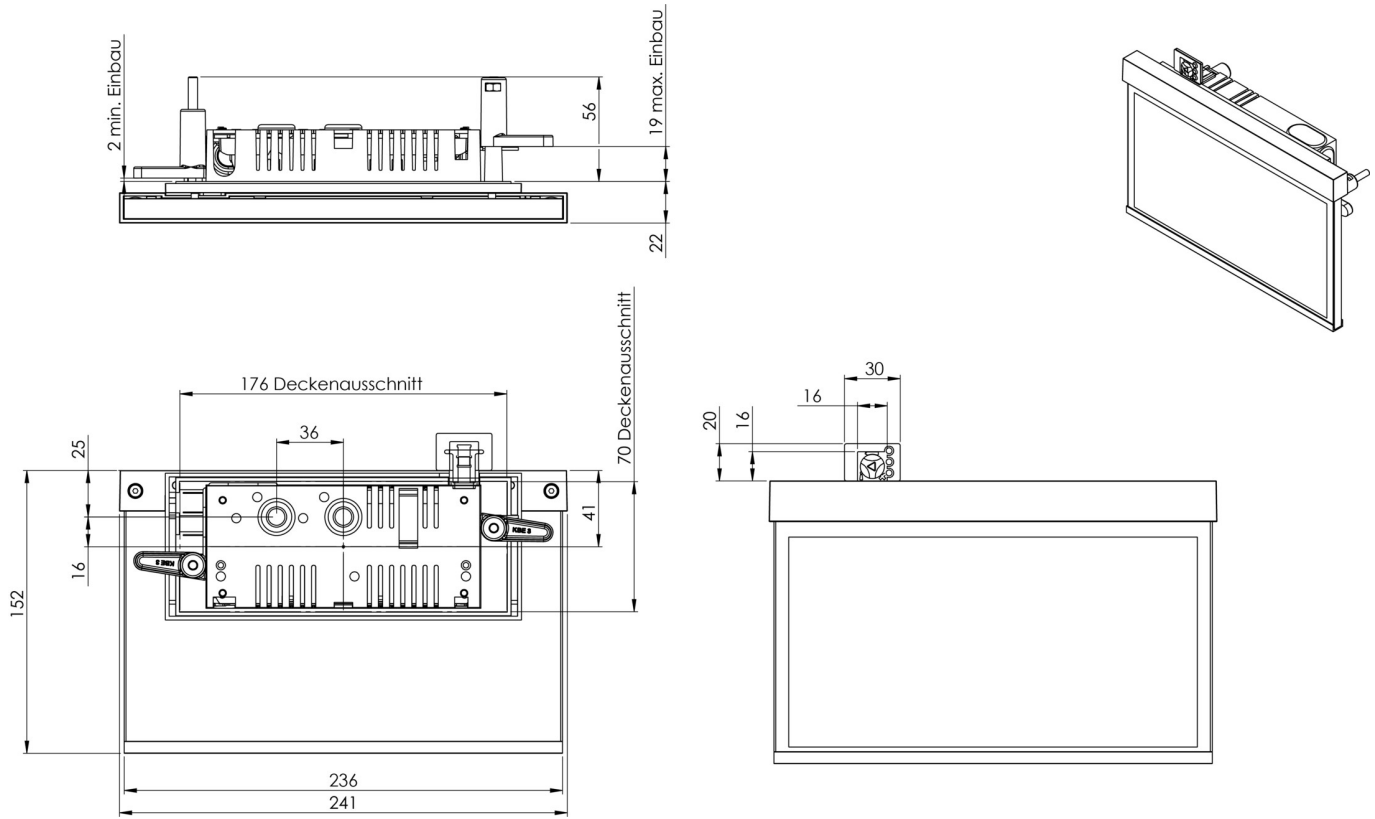

## ACCESSORY LIST

BALLPLX-AM -

AM-XBE -

LFP3212-LEO - Technology Battery



## RELATED PRODUCTS

| Art.-No.   | Image  | Monitoring            | Supply         | Color | Investment | Automatic log | Maintenance level | Remote maintenance | max. luminaires  | Single luminaire monitoring |
|------------|--|-----------------------|----------------|-------|------------|---------------|-------------------|--------------------|------------------|-----------------------------|
| AMR408WL   |   | Wireless Professional | Single battery |       | €€         | yes           | low               | yes                | 1,000 per system | central                     |
| AMR408WL-E |  | Wireless Professional | Single battery |       | €€         | yes           | low               | yes                | 1,000 per system | central                     |

As of: 08.07.2024 - Subject to technical changes and errors.