



Art.-Nr: AMRA009

Utgangsskilt lys <https://www.deepl.com/de/translator#de/nb/zentrale%20Stromversorgungssysteme>

Veggmontering, CPS, CPS, 22 m, IP20, Sinkstøping, hvit



Mer informasjon



TEKNISKE DATA

Type armatur	Utgangsskilt lys
Monteringstype	Veggmontering
Deteksjonsområde	22 m
piktogram	sett
Lyspærer	LED
Koffertmateriale	Sinkstøping
Farge på huset	hvit
IP-beskyttelse)	IP20
Slagstyrke (IK)	≥ 3
Sertifisering	WEEE, CE, ENEC
beskyttelses klasse	2
omsorg	https://www.deepl.com/de/translator#de/nb/zentrale%20Stromversorgungssysteme
overvåkning	CPS
Brotid	CPS
Driftsmodus	Kontinuerlig vekslings
Inngangsspenning AC	230 V
Inngangsfrekvens	50/60 Hz
Inngangsspenning DC	100-254 V
Maks effekt.	2,4 W
Ytelse DS	2,4 W
Ytelse BS	0 W
dybde	79 mm



Bredde	306 mm
Høyde	196 mm
Installasjonslengde	176 mm
Installasjonsbredde	68 mm
Installasjonshøyde	40 mm
Vekt	1.45
Vekt inkludert emballasje	1.81
Tverrsnitt for tilkobling	1.5 mm ²
Koblingsinngang	Nei
Blokkering av nødlys	Nei
Batteritilkobling	Nei
Dimmefunksjon	Nei
Tolltariffnummer	94056180
Opprinnelsesland	DEUTSCHLAND
EAN	4260581714444





Technical drawing of the Ecoline 1500 oven showing dimensions and installation requirements. The drawing includes a side view of the oven unit and a top view of the oven cavity.

Dimensions:

- Top view width: 303
- Top view depth: 236
- Side view height: 186
- Side view width: 56

Installation Requirements:

- Top: 2 min. Einbau (Minimum 2 mm clearance)
- Bottom: 19 max. Einbau (Maximum 19 mm clearance)

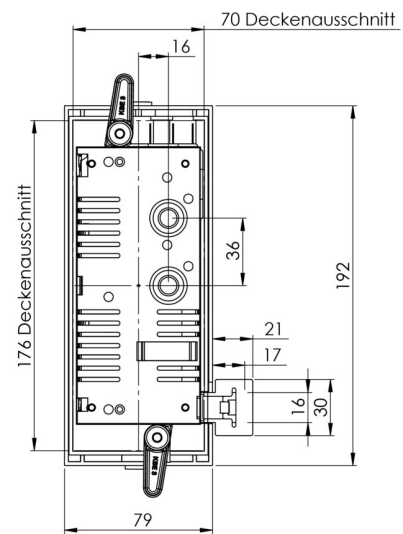

AM-XBE -

www.rp-group.com