



**Art.-Nr: ASMU018WB**  
**Exit sign Single Battery**  
**Universal, Wireless Basic, 8 h, 22 m, IP40, Aluminium,**  
**Anodised aluminium**

ASMU is an innovative aluminium multifunctional edge luminaire for universal mounting (wall/ceiling). It is suited for maintained and non-maintained mode. It's easy to install and has variably useable pictograms to increase planning security. Pictogram set (left, right, straight up and down, blind) included. Signs according to EN 60598-1, EN 60598-2-22 and EN 1838 norms.



[More information](#)




## TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Universal
Recognition distance	22 m
Pictograph	Set
Illuminant	LED
Housing material	Aluminium
Housing color	Anodised aluminium
Protection type (IP)	IP40
Impact resistance (IK)	3
Certification	Waste disposal, CE, ENEC, TÜV Rheinland Type approved
Insulation class	1
Supply	Single Battery
Monitoring	Wireless Basic
Bridging time	8 h
Battery	LiFePO4 3,2 V / 3,3 Ah LiFePO4 - Lithium Iron Phosphate Battery
Operating mode	Standby circuit / permanent circuit
Input voltageAC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	- V
Power max.	5,3 W
Power DS	3,9 W



Power BS	1,5 W
Depth	54 mm
Width	277 mm
Height	184 mm
Weight	0.89
Weight incl. packaging	1.06
Connection cross-section	2.5 mm <sup>2</sup>
Switching input	Yes
Emergency light blocking	No
Battery connection	Connector
Dimming function	No
Luminous flux mains	190 lm
Luminous flux emergency	85 lm
Customs tariff number	94056180
Country of origin	DEUTSCHLAND
EAN	4260659561123

## TECHNICAL DRAWING

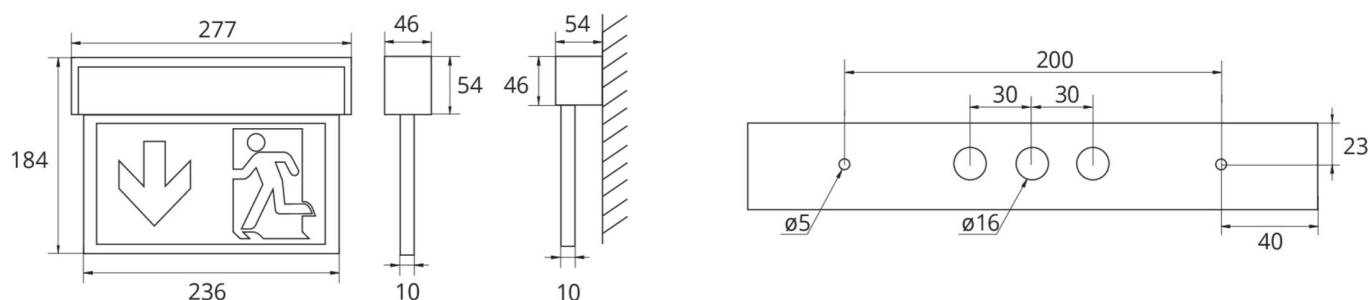



## ACCESSORY LIST

DSA -  
2PS-EB -



## RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
ASMU018SC		SelfControl	Single battery		€	no	high	no	unlimited	itself
ASMU018SC-G10		SelfControl	Single battery		€	no	high	no	unlimited	itself
ASMU018SC-WS-G10		SelfControl	Single battery		€	no	high	no	unlimited	itself
ASMU018WL		Wireless Professional	Single battery		€€	yes	low	yes	1,000 per system	central
ASMU018WL-G10		Wireless Professional	Single battery		€€	yes	low	yes	1,000 per system	central



Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
ASMU018WL-WS		Wireless Professional	Single battery		€€	yes	low	yes	1,000 per system	central
ASMU018SC-WS		SelfControl	Single battery		€	no	high	no	unlimited	itself
ASMU018WB-WS		Wireless Basic	Single battery		€€	yes	low	yes	50	central
ASMU018WL-WS-G10		Wireless Professional	Single battery		€€	yes	low	yes	1,000 per system	central

As of: 29.06.2024 - Subject to technical changes and errors.