



Art.-Nr: ASMU018WL
Exit sign Single Battery
Universal, Wireless Professional, 8 h, 22 m, IP40, Aluminium,
Anodised aluminium

ASMU is an innovative aluminium multifunctional edge luminaire for universal mounting (wall/ceiling). It is suited for maintained and non-maintained mode. It's easy to install and has variably useable pictograms to increase planning security. Pictogram set (left, right, straight up and down, blind) included. Signs according to EN 60598-1, EN 60598-2-22 and EN 1838 norms.

Wireless centralised control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional.



More information

www.rp-group.com/en/item/ASMU018WL




TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Universal
Recognition distance	22 m
Pictograph	Set
Illuminant	LED
Housing material	Aluminium
Housing color	Anodised aluminium
Protection type (IP)	IP40
Impact resistance (IK)	5
Certification	TÜV Rheinland Type approved, CE, WEEE, ENEC
Insulation class	1
Supply	Single Battery
Monitoring	Wireless Professional
Bridging time	8 h
Battery	3,2V V 3,3Ah Ah/
Operating mode	Standby circuit / permanent circuit
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	- V



Power max.	5,3 W
Power DS	3,9 W
Power BS	1,5 W
Ambient temperature DS	-5 °C - 50 °C
Ambient temperature BS	-5 °C - 40 °C
Depth	54 mm
Width	277 mm
Height	184 mm
Weight	0.89
Weight incl. packaging	1.06
Connection cross-section	2.5 mm ²
Switching input	Yes
Emergency light blocking	No
Battery connection	Connector
Dimming function	No
Luminous flux mains	190 lm
Luminous flux emergency	85 lm
Customs tariff number	94056180
EAN	4260659561543

TECHNICAL DRAWING

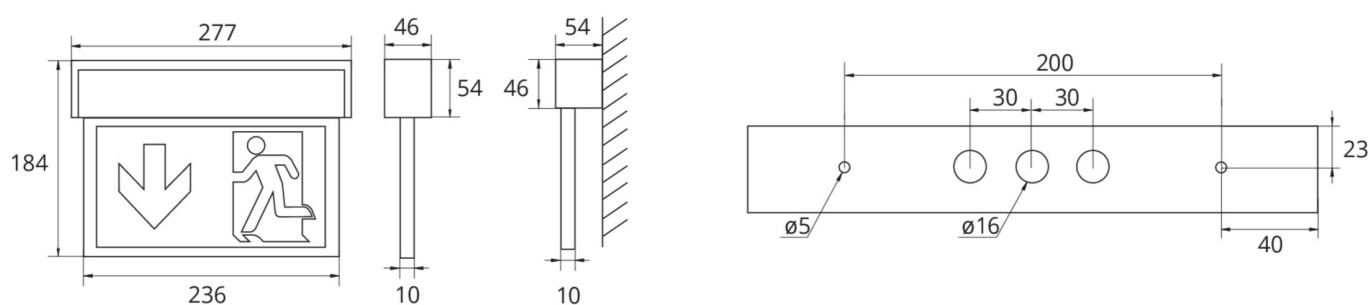

ACCESSORY LIST

DSA -
2PS-EB -



RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
ASMU018SC		SelfControl	Single battery	Alu eloxiert	€	no	high	no	unlimited	itself
ASMU018SC-G10		SelfControl	Single battery	Alu eloxiert	€	no	high	no	unlimited	itself
ASMU018SC-WS-G10		SelfControl	Single battery	Alu eloxiert	€	no	high	no	unlimited	itself
ASMU018WB		Wireless Basic	Single battery	Alu eloxiert	€€	yes	low	yes	50	central
ASMU018WL-G10		Wireless Professional	Single battery	Alu eloxiert	€€	yes	low	yes	1,000 per system	central
ASMU018WL-WS		Wireless Professional	Single battery	RAL 9003	€€	yes	low	yes	1,000 per system	central
ASMU018SC-WS		SelfControl	Single battery	RAL 9003	€	no	high	no	unlimited	itself
ASMU018WB-WS		Wireless Basic	Single battery	RAL 9003	€€	yes	low	yes	50	central
ASMU018WL-WS-G10		Wireless Professional	Single battery	RAL 9003	€€	yes	low	yes	1,000 per system	central

As of: 20.08.2024 - Subject to technical changes and errors.