



Art.-Nr: ASMU519CC-WS

Utgangsskilt lys sentral strømforsyning

Universell, CoreCompact 24, sentral strømforsyning, 22 m, IP40, aluminium, hvit

ASMU is an innovative aluminium multifunctional edge luminaire for universal mounting (wall/ceiling). It is suited for maintained and non-maintained mode. It's easy to install and has variably useable pictograms to increase planning security. Pictogram set (left, right, straight up and down, blind) included. Signs according to EN 60598-1, EN 60598-2-22 and EN 1838 norms.



Mer informasjon




TEKNISKE DATA

Type armatur	Utgangsskilt lys
Monteringstype	Universell
Deteksjonsområde	22 m
piktogram	sett
Lyspærer	LED
Koffertmateriale	aluminium
Farge på huset	hvit
IP-beskyttelse)	IP40
Slagstyrke (IK)	3
Sertifisering	Sjøppeltømming, CE, ENEC, TÜV Rheinland designtestet
beskyttelses klasse	3
omsorg	sentral strømforsyning
overvåkning	CoreCompact 24
Brotid	sentral strømforsyning
Driftsmodus	Standby kobling / permanent kobling
Inngangsspenning AC	24 V
Maks effekt.	2,1 W
Ytelse DS	2,1 W
Ytelse BS	0,4 W
dybde	54 mm
Bredde	277 mm



Høyde	184 mm
Vekt	0.75
Vekt inkludert emballasje	0.92
Tverrsnitt for tilkobling	2.5 mm ²
Koblingsinngang	Nei
Blokkering av nødlys	Nei
Batteritilkobling	Nei
Dimmefunksjon	Ja
Tolltariffnummer	94056180
Opprinnelsesland	DEUTSCHLAND
EAN	4260682156594

TEKNISK TEGNING

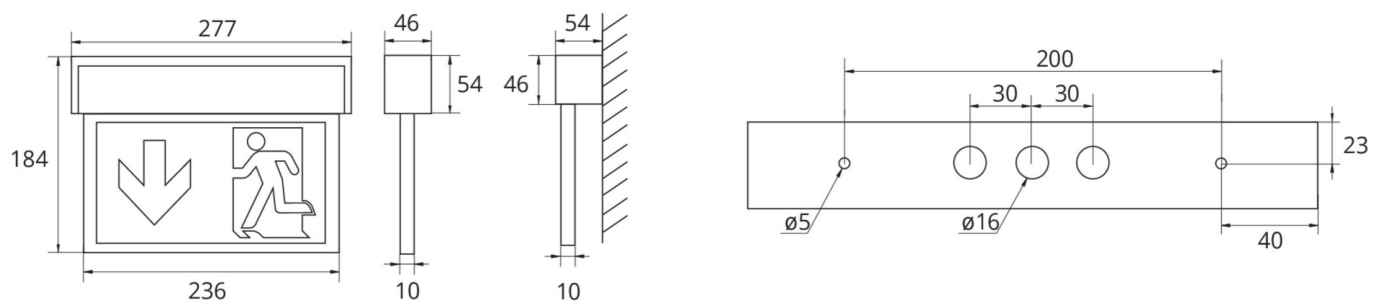

TILBEHØRSLISTE

DSA -
2PS-EB -

Fra: 29.06.2024 - Det tas forbehold om tekniske endringer og feil.