



Art.-Nr: ASMU519CC

Exit sign Central power supply

**Universal, CoreCompact 24, Central power supply, 22 m,
IP40, Aluminium, Anodised aluminium**

ASMU is an innovative aluminium multifunctional edge luminaire for universal mounting (wall/ceiling). It is suited for maintained and non-maintained mode. It's easy to install and has variably useable pictograms to increase planning security. Pictogram set (left, right, straight up and down, blind) included. Signs according to EN 60598-1, EN 60598-2-22 and EN 1838 norms.



[More information](#)




TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Universal
Recognition distance	22 m
Pictograph	Set
Illuminant	LED
Housing material	Aluminium
Housing color	Anodised aluminium
Protection type (IP)	IP40
Impact resistance (IK)	3
Certification	Waste disposal, CE, ENEC, TÜV Rheinland Type approved
Insulation class	3
Supply	Central power supply
Monitoring	CoreCompact 24
Bridging time	Central power supply
Operating mode	Standby circuit / permanent circuit
Input voltageAC	24 V
Power max.	2,1 W
Power DS	2,1 W
Power BS	0,4 W
Depth	54 mm
Width	277 mm



Height	184 mm
Weight	0.75
Weight incl. packaging	0.92
Connection cross-section	2.5 mm ²
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Customs tariff number	94056180
Country of origin	DEUTSCHLAND
EAN	4260682156587

TECHNICAL DRAWING

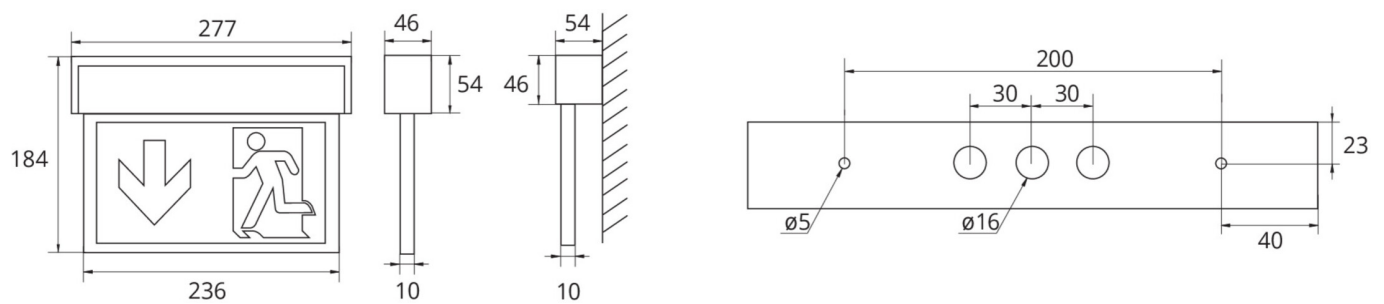

ACCESSORY LIST

DSA -
2PS-EB -



RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
ASMU019ML		ML	Central power supply		€€€	Yes	low	Yes	1,920 per system	central
ASMU019ML-WS		ML	Central power supply		€€€	Yes	low	Yes	1,920 per system	central

As of: 27.06.2024 - Subject to technical changes and errors.