



**Art.-Nr: AXCC009-E**

**Exit sign Centralised power supply systems**

**Ceiling mounting, CPS, CPS, 30 m, IP20, Zinc die-cast, Stainless steel**

The AXCC is a zinc-diecast exit sign with cord suspension for recessed ceiling mounting for the marking of escape routes. It is part of a complete luminaire series, which features solutions for every mounting situation and was honored with the German Design Award. Luminaire of the A-Series are of course equipped with modern LED illuminants and offer the flexibility of changeable pictograms.

LED exit sign according to EN 60598-1, EN 60598-2-22, EN 7010 and EN 1838



More information



**TECHNICAL DATA**


|                      |                                  |
|----------------------|----------------------------------|
| Luminaire type       | Exit sign                        |
| Mounting             | Ceiling mounting                 |
| Recognition distance | 30 m                             |
| Pictograph           | Set                              |
| Illuminant           | LED                              |
| Housing material     | Zinc die-cast                    |
| Housing color        | Stainless steel                  |
| Protection type (IP) | IP20                             |
| Certification        | WEEE, CE, ENEC                   |
| Insulation class     | 2                                |
| Supply               | Centralised power supply systems |
| Monitoring           | CPS                              |
| Bridging time        | CPS                              |
| Operating mode       | Permanent circuit                |
| Input voltage AC     | 230 V                            |
| Input frequency      | 50 / 60 Hz                       |
| Input voltage DC     | 100-254 V                        |
| Power max.           | 3,3 W                            |
| Power DS             | 3,3 W                            |
| Power BS             | 0 W                              |



|                          |                     |
|--------------------------|---------------------|
| Depth                    | 80 mm               |
| Width                    | 312 mm              |
| Height                   | 181 mm              |
| Installation length      | 176 mm              |
| Installation width       | 68 mm               |
| Installation height      | 40 mm               |
| Weight                   | 1.87                |
| Weight incl. packaging   | 2.36                |
| Connection cross-section | 1.5 mm <sup>2</sup> |
| Switching input          | No                  |
| Emergency light blocking | No                  |
| Battery connection       | No                  |
| Dimming function         | No                  |
| Customs tariff number    | 94056180            |
| Country of origin        | DEUTSCHLAND         |
| EAN                      | 4260581715113       |



## TECHNICAL DRAWING

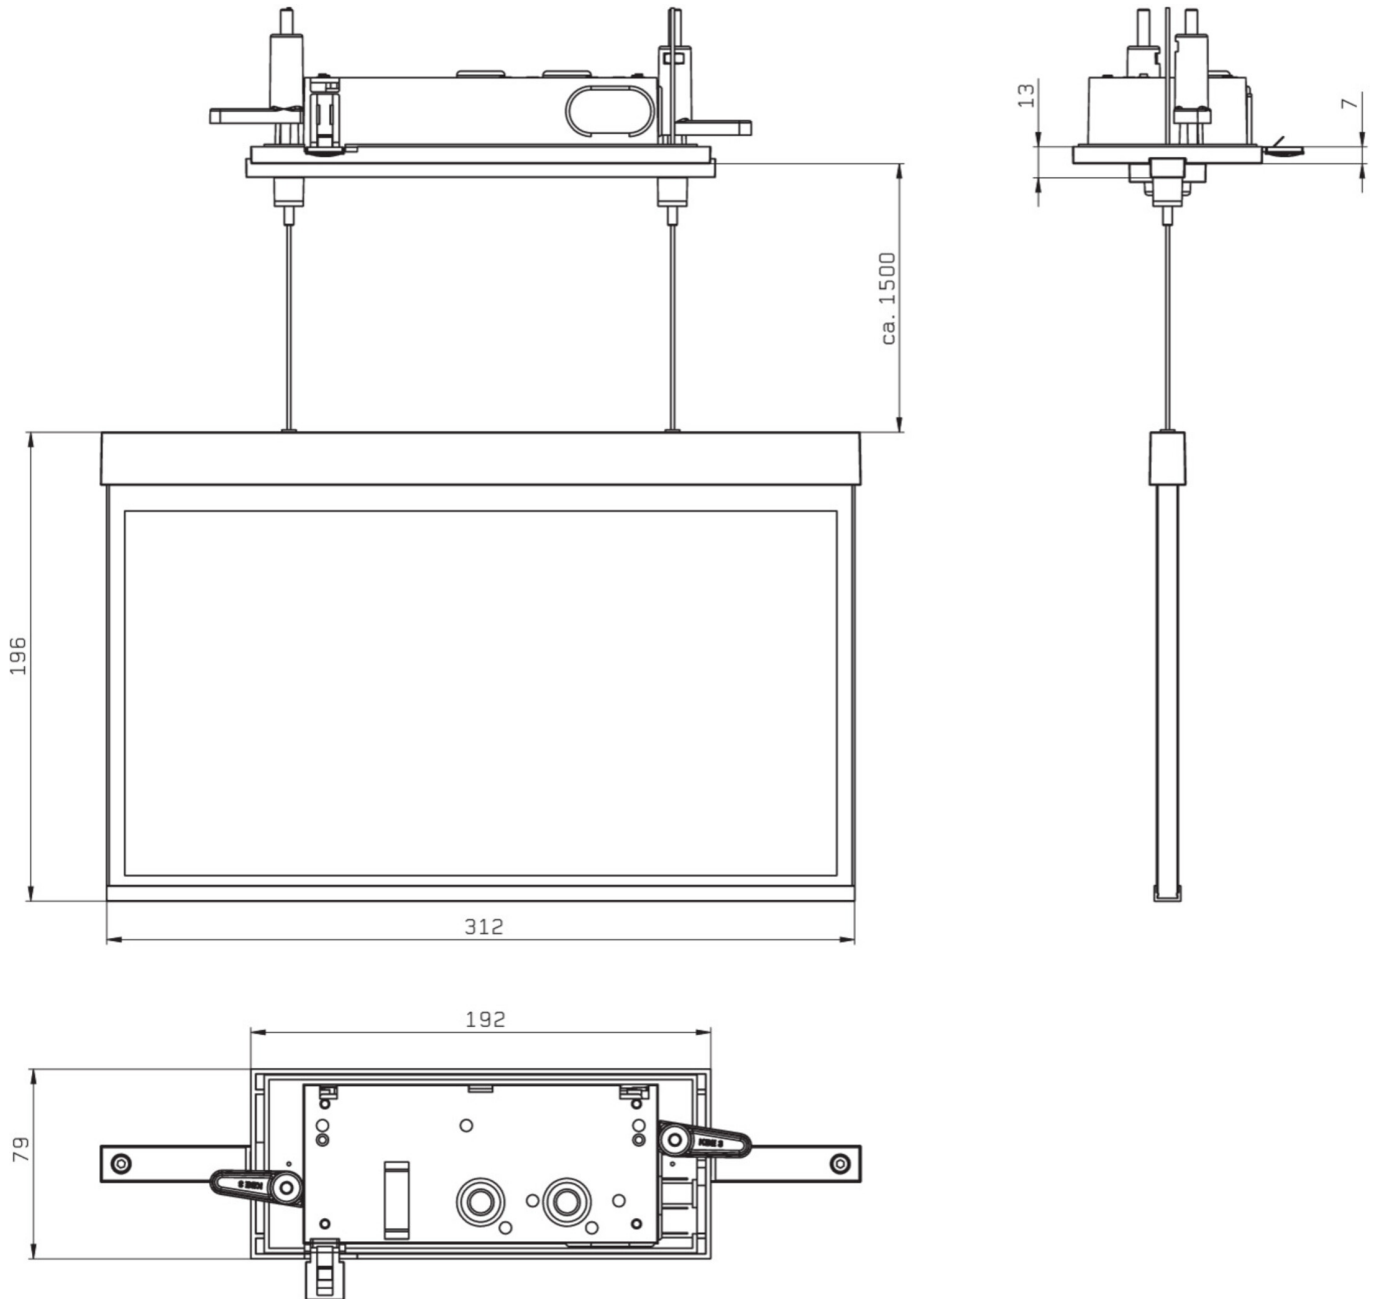

## ACCESSORY LIST

AM-XBE -

As of: 09.07.2024 - Subject to technical changes and errors.