



Art.-Nr: AXCC009ML-AZ

Exit sign Central power supply

Ceiling mounting, ML, Central power supply, 30 m, IP20, Zinc die-cast, Anthracite

The AXCC is a zinc-diecast exit sign with cord suspension for recessed ceiling mounting for the marking of escape routes. It is part of a complete luminaire series, which features solutions for every mounting situation and was honored with the German Design Award. Luminaire of the A-Series are of course equipped with modern LED illuminants and offer the flexibility of changeable pictograms.

LED exit sign according to EN 60598-1, EN 60598-2-22, EN 7010 and EN 1838



More information



TECHNICAL DATA


| | |
|----------------------|----------------------------|
| Luminaire type | Exit sign |
| Mounting | Ceiling mounting |
| Recognition distance | 30 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Zinc die-cast |
| Housing color | Anthracite |
| Protection type (IP) | IP20 |
| Certification | Waste disposal, CE, ENEC |
| Insulation class | 2 |
| Supply | Central power supply |
| Monitoring | ML |
| Bridging time | Central power supply |
| Operating mode | single luminaire switching |
| Input voltage AC | 230 V |
| Input frequency | 50 / 60 Hz |
| Input voltage DC | 216 V |
| Power max. | 4,5 W |
| Power DS | 4,5 W |
| Power BS | 1,1 W |



| | |
|--------------------------|---------------------|
| Depth | 80 mm |
| Width | 312 mm |
| Height | 181 mm |
| Installation length | 176 mm |
| Installation width | 68 mm |
| Installation height | 40 mm |
| Weight | 1.9 |
| Weight incl. packaging | 2.39 |
| Connection cross-section | 2.5 mm ² |
| Switching input | Yes |
| Emergency light blocking | No |
| Battery connection | No |
| Dimming function | Yes |
| Customs tariff number | 94056180 |
| Country of origin | DEUTSCHLAND |
| EAN | 4260581715137 |



TECHNICAL DRAWING

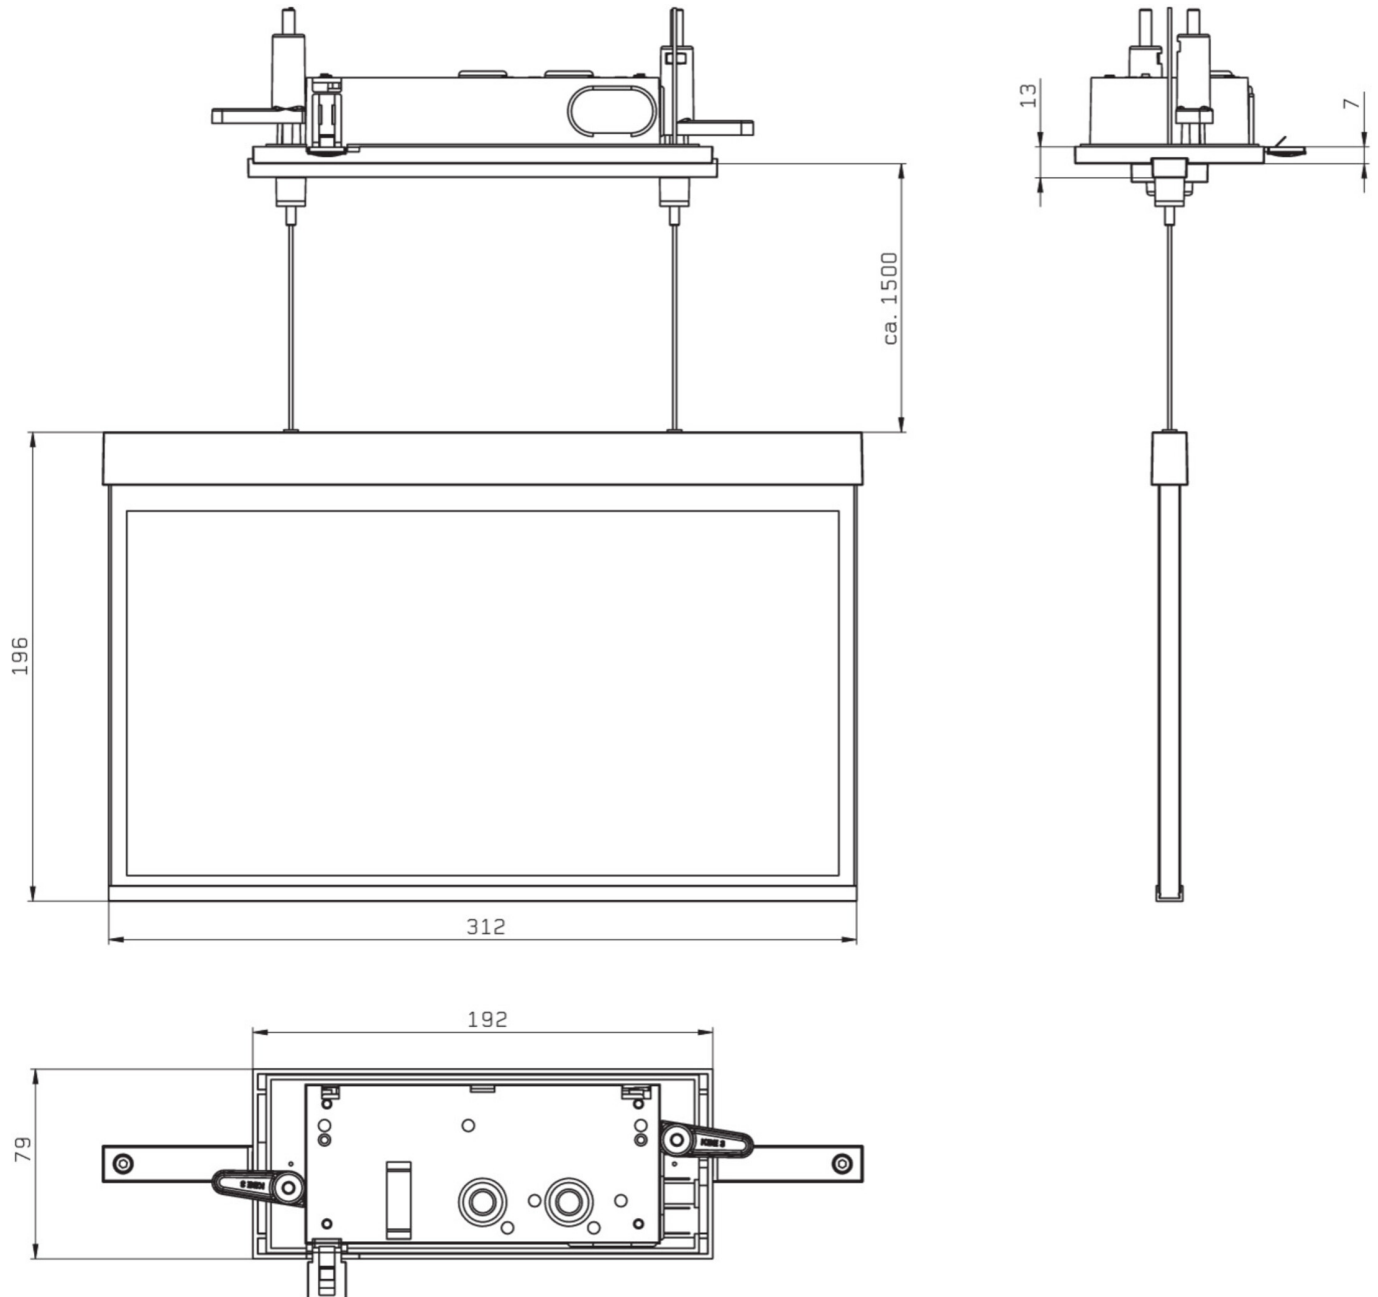






ACCESSORY LIST

AM-XBE -



RELATED PRODUCTS

| Art.-No. | Image | Monitoring | Supply | Color | Investment | Automatic log | Maintenance level | Remote maintenance | max. luminaires | Single luminaire monitoring |
|--------------|-------------------------------------------------------------------------------------|----------------|----------------------|-------|------------|---------------|-------------------|--------------------|------------------|-----------------------------|
| AXCC009ML |  | ML | Central power supply | | €€€ | Yes | low | Yes | 1,920 per system | central |
| AXCC009ML-E |  | ML | Central power supply | | €€€ | Yes | low | Yes | 1,920 per system | central |
| AXCC509CC |  | CoreCompact 24 | Central power supply | | €€ | Yes | low | Yes | | central |
| AXCC509CC-AZ |  | CoreCompact 24 | Central power supply | | €€ | Yes | low | Yes | | central |
| AXCC509CC-E |  | CoreCompact 24 | Central power supply | | €€ | Yes | low | Yes | | central |

As of: 27.06.2024 - Subject to technical changes and errors.