



Art.-Nr: AXCC509CC-AZ Exit sign Central power supply Ceiling mounting, CoreCompact 24, Central power supply, 30 m, IP20, Zinc die-cast, Anthracite

The AXCC is a zinc-diecast exit sign with cord suspension for recessed ceiling mounting for the marking of escape routes. It is part of a complete luminaire series, which features solutions for every mounting situation and was honored with the German Design Award. Luminaire of the A-Series are of course equipped with modern LED illuminants and offer the flexibility of changeable pictograms. LED exit sign according to EN 60598-1, EN 60598-2-22, EN 7010 and EN 1838





More information



TECHNICAL DATA

| Luminaire type | Exit sign |
|----------------------|-------------------------------------|
| Mounting | Ceiling mounting |
| Recognition distance | 30 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Zinc die-cast |
| Housing color | Anthracite |
| Protection type (IP) | IP20 |
| Certification | Waste disposal, CE, ENEC |
| Insulation class | 2 |
| Supply | Central power supply |
| Monitoring | CoreCompact 24 |
| Bridging time | Central power supply |
| Operating mode | Standby circuit / permanent circuit |
| Input voltageAC | 24 V |
| Power max. | 3,7 W |
| Power DS | 3,7 W |
| Power BS | 0,4 W |
| Depth | 80 mm |
| Width | 312 mm |






| Height | 181 mm |
|--------------------------|---------------|
| Installation length | 176 mm |
| Installation width | 68 mm |
| Installation height | 40 mm |
| Weight | 1.83 |
| Weight incl. packaging | 2.32 |
| Connection cross-section | 2.5 mm² |
| Switching input | No |
| Emergency light blocking | No |
| Battery connection | No |
| Luminous flux mains | 230 lm |
| Luminous flux emergency | 230 lm |
| Customs tariff number | 94056180 |
| Country of origin | DEUTSCHLAND |
| EAN | 4260682156648 |





TECHNICAL DRAWING

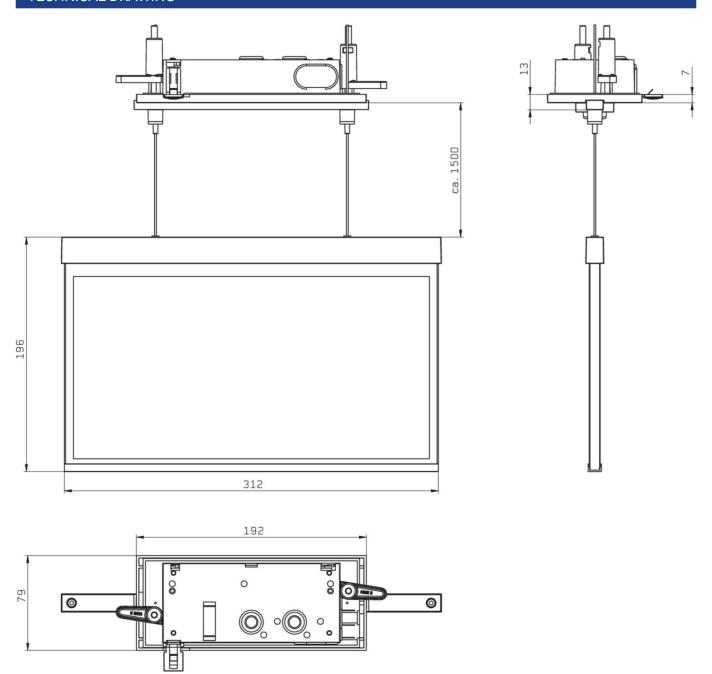

ACCESSORY LIST

AM-XBE -





RELATED PRODUCTS

| ArtNo. | lmage | Monitoring | Supply | Color | Investment | Automatic log | Maintenance level | Remote maintenance | max. Iuminaires | Single luminaire monitoring |
|------------------|------------|----------------|-------------------------|-------|------------|------------------|----------------------|-----------------------|---------------------|--------------------------------|
| AXCC009ML | | ML | Central power supply | | €€€ | Yes | low | Yes | 1,920 per system | central |
| AXCC009ML- AZ | | ML | Central power supply | | €€€ | Yes | low | Yes | 1,920 per system | central |
| AXCC009ML-E | 3 3 | ML | Central power supply | | €€€ | Yes | low | Yes | 1,920 per system | central |
| AXCC509CC | ₹ | CoreCompact 24 | Central power supply | | €€ | Yes | low | Yes | | central |
| AXCC509CC-E | ₹ → | CoreCompact 24 | Central power supply | | €€ | Yes | low | Yes | | central |

As of: 27.06.2024 - Subject to technical changes and errors.