



Art.-Nr: AXCP009ML Exit sign Centralised power supply systems Ceiling mounting, ML, CPS, 30 m, IP20, Zinc die-cast, white

The AXCP is a zinc-diecast exit sign with pendant fitting for recessed ceiling mounting and for the marking of escape routes. It is part of a complete luminaire series, which features solutions for every mounting situation and was honored with the German Design Award. Luminaires of the A-Series are equipped with modern LED illuminants and offer flexibility with changeable pictograms.







More information



TECHNICAL DATA

| Luminaire type | Exit sign |
|------------------------|----------------------------------|
| Mounting | Ceiling mounting |
| Recognition distance | 30 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Zinc die-cast |
| Housing color | white |
| Protection type (IP) | IP20 |
| Impact resistance (IK) | ≥ 3 |
| Certification | WEEE, CE, ENEC |
| Insulation class | 2 |
| Supply | Centralised power supply systems |
| Monitoring | ML |
| Bridging time | CPS |
| Operating mode | single luminaire switching |
| Input voltageAC | 230 V |
| Input frequency | 50 / 60 Hz |
| Input voltage DC | 216 V |
| Power max. | 4,5 W |
| Power DS | 4,5 W |
| Power BS | 1,1 W |






| ~pim_attribute~zulaessigeUmgebungstemperaturInDS | -20 °C - 40 °C |
|--|----------------|
| ~pim_attribute~zulaessigeUmgebungstemperaturInBS | -20 °C - 40 °C |
| Depth | 79 mm |
| Width | 317 mm |
| Height | 205 mm |
| Installation length | 176 mm |
| Installation width | 68 mm |
| Installation height | 40 mm |
| Weight | 1.72 |
| Weight incl. packaging | 2.21 |
| Connection cross-section | 2.5 mm² |
| Switching input | Yes |
| Emergency light blocking | No |
| Battery connection | No |
| Dimming function | Yes |
| Customs tariff number | 94056180 |
| EAN | 4260581715243 |





TECHNICAL DRAWING

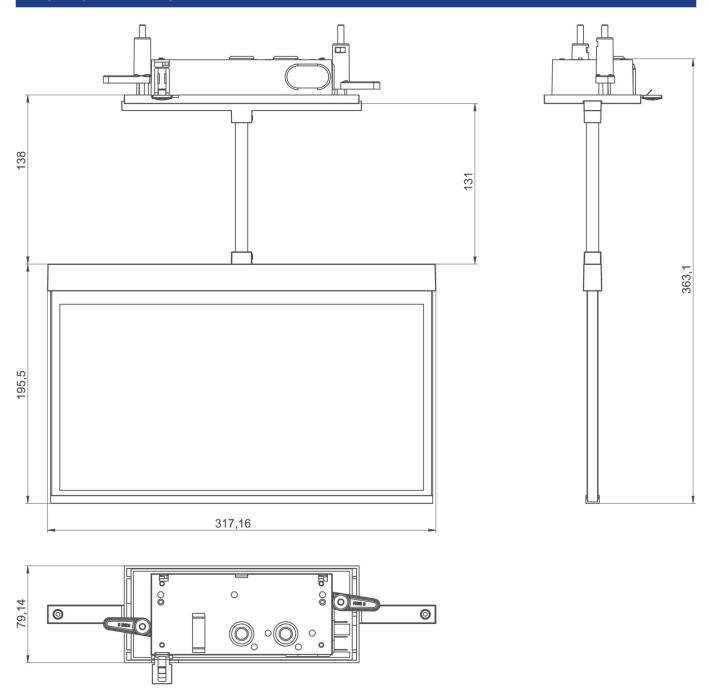

ACCESSORY LIST

AM-XBE -

AM-X-PKG -





RELATED PRODUCTS

| ArtNo. | lmage | Monitoring | Supply | Color | Investment | Automatic log | Maintenance level | Remote maintenance | max. Iuminaires | Single luminaire monitoring |
|------------------|--------------|-------------------|-------------------------|-------|------------|------------------|----------------------|-----------------------|---------------------|--------------------------------|
| AXCP009ML- AZ | <u>}</u> | ML | Central power supply | | €€€ | Yes | low | Yes | 1,920 per system | central |
| AXCP009ML-E | | ML | Central power supply | | €€€ | Yes | low | Yes | 1,920 per system | central |
| AXCP509CC | <i>I</i> 3 → | CoreCompact 24 | Central power supply | | €€ | Yes | low | Yes | | central |
| AXCP509CC- AZ | ₹ → | CoreCompact 24 | Central power supply | | €€ | Yes | low | Yes | | central |
| AXCP509CC-E | ₹ → | CoreCompact 24 | Central power supply | | €€ | Yes | low | Yes | | central |

As of: 09.07.2024 - Subject to technical changes and errors.