



**Art.-Nr: AXCP401WL-AZ**

**Exit sign Single Battery**

**Ceiling mounting, Wireless Professional, 1 h, 30 m, IP20, Zinc die-cast, Anthracite**

The AXCP is a zinc-diecast exit sign with pendant fitting for recessed ceiling mounting and for the marking of escape routes. It is part of a complete luminaire series, which features solutions for every mounting situation and was honored with the German Design Award. Luminaires of the A-Series are equipped with modern LED illuminants and offer flexibility with changeable pictograms.

LED exit sign according to EN 60598-1, EN 60598-2-22, EN 7010 and EN 1838



More information



## TECHNICAL DATA


|                        |                                                                           |
|------------------------|---------------------------------------------------------------------------|
| Luminaire type         | Exit sign                                                                 |
| Mounting               | Ceiling mounting                                                          |
| Recognition distance   | 30 m                                                                      |
| Pictograph             | Set                                                                       |
| Illuminant             | LED                                                                       |
| Housing material       | Zinc die-cast                                                             |
| Housing color          | Anthracite                                                                |
| Protection type (IP)   | IP20                                                                      |
| Impact resistance (IK) | ≥ 3                                                                       |
| Certification          | WEEE, CE, ENEC                                                            |
| Insulation class       | 2                                                                         |
| Supply                 | Single Battery                                                            |
| Monitoring             | Wireless Professional                                                     |
| Bridging time          | 1 h                                                                       |
| Battery                | LiFePO4 - 2 pcs - 3,2 V /1200mAh LiFePO4 - Lithium Iron Phosphate Battery |
| Operating mode         | Standby circuit / permanent circuit                                       |
| Input voltageAC        | 230 V                                                                     |
| Input frequency        | 50 Hz                                                                     |
| Power max.             | 5,6 W                                                                     |
| Power DS               | 4,5 W                                                                     |



|                                                  |                     |
|--------------------------------------------------|---------------------|
| Power BS                                         | 0,8 W               |
| ~pim_attribute~zulaessigeUmgebungstemperaturInDS | -5 °C - 40 °C       |
| ~pim_attribute~zulaessigeUmgebungstemperaturInBS | -5 °C - 40 °C       |
| Depth                                            | 79 mm               |
| Width                                            | 317 mm              |
| Height                                           | 205 mm              |
| Installation length                              | 176 mm              |
| Installation width                               | 68 mm               |
| Installation height                              | 40 mm               |
| Weight                                           | 1.87                |
| Weight incl. packaging                           | 2.36                |
| Connection cross-section                         | 2.5 mm <sup>2</sup> |
| Switching input                                  | Yes                 |
| Emergency light blocking                         | Yes                 |
| Battery connection                               | Connector           |
| Dimming function                                 | Yes                 |
| Customs tariff number                            | 94056180            |
| EAN                                              | 4260682153692       |



## TECHNICAL DRAWING

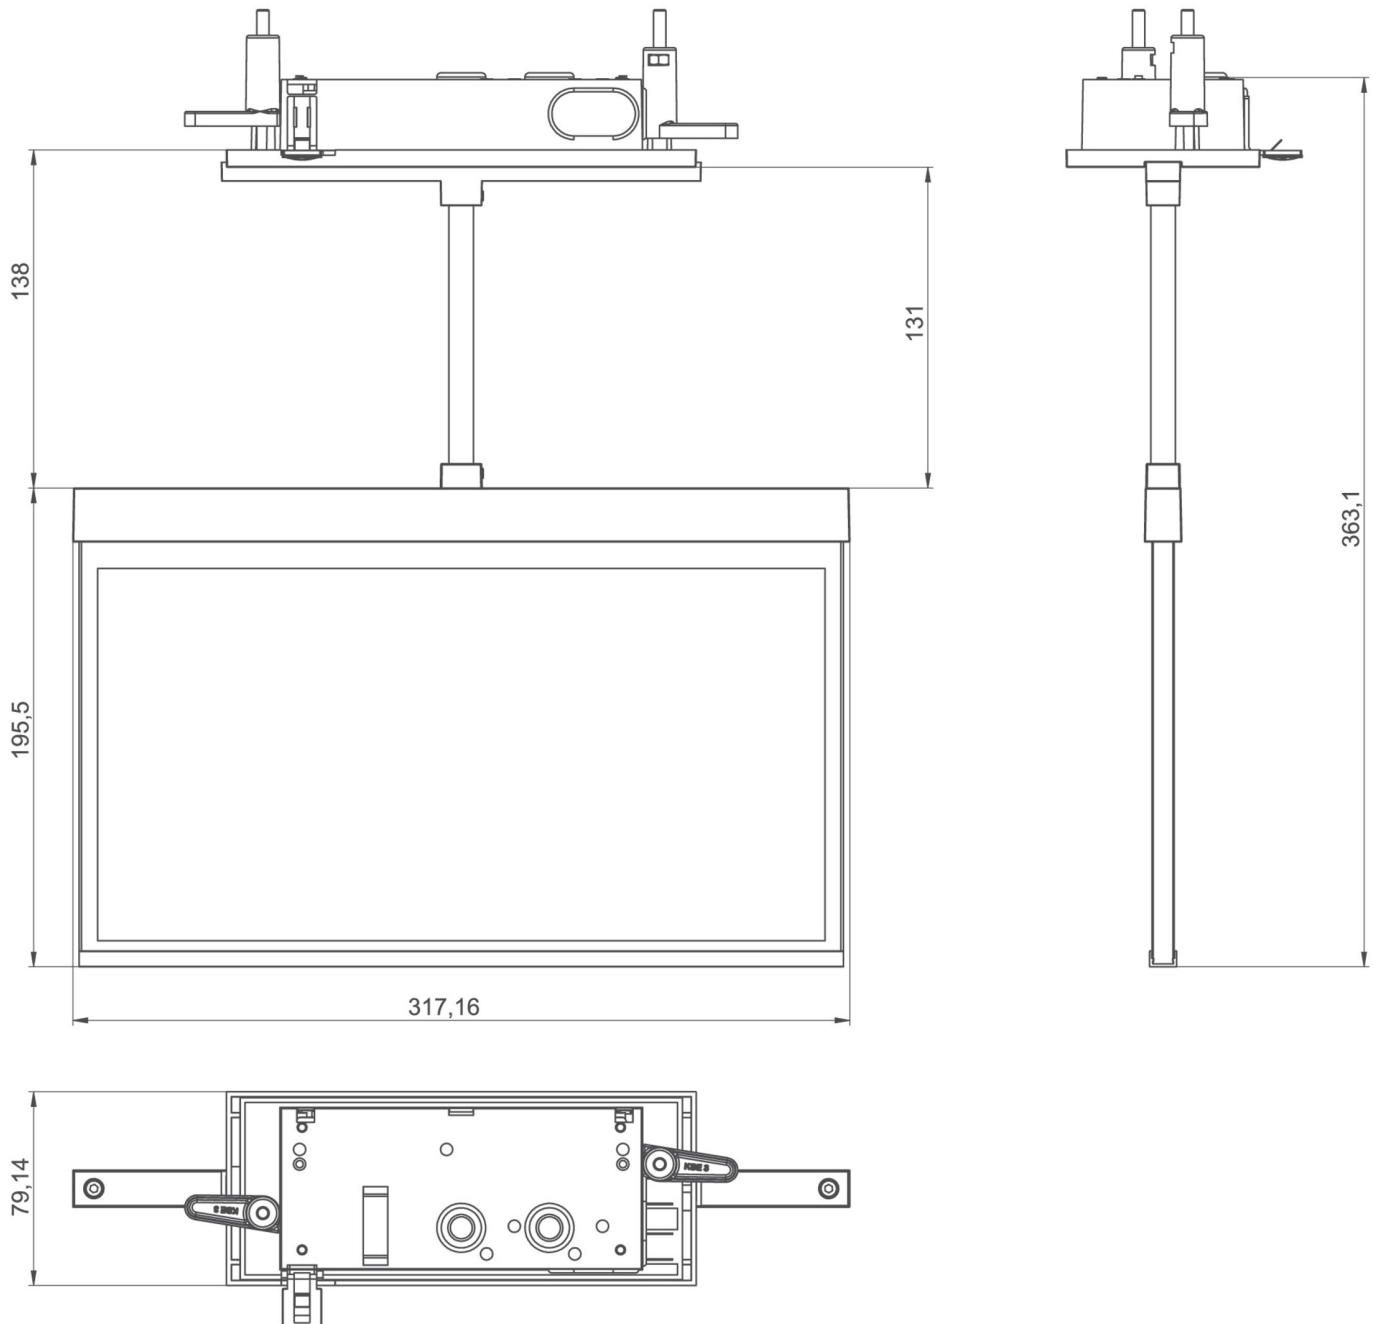

## ACCESSORY LIST

AM-XBE -  
AM-X-PKG-AZ -  
LFP3212-LEO - Technology Battery



## RELATED PRODUCTS

| Art.-No.    | Image                                                                              | Monitoring            | Supply         | Color | Investment | Automatic log | Maintenance level | Remote maintenance | max. luminaires  | Single luminaire monitoring |
|-------------|------------------------------------------------------------------------------------|-----------------------|----------------|-------|------------|---------------|-------------------|--------------------|------------------|-----------------------------|
| AXCP401WL   |   | Wireless Professional | Single battery |       | €€         | yes           | low               | yes                | 1,000 per system | central                     |
| AXCP401WL-E |  | Wireless Professional | Single battery |       | €€         | yes           | low               | yes                | 1,000 per system | central                     |

As of: 09.07.2024 - Subject to technical changes and errors.