



Art.-Nr: AXRA009ML-E Exit sign Central power supply Recessed wall mounting, ML, Central power supply, 30 m, IP40, Zinc die-cast, Stainless steel

The AXRA is a zinc-diecast exit sign for recessed wall mounting, designed as flag mount, and for the marking of escape routes. It is part of a complete luminaire series, which features solutions for every mounting situation and was honored with the German Design Award. Luminaires of the A-Series are equipped with modern LED illuminants and offer flexibility with changeable pictograms.

LED exit sign according to EN 60598-1, EN 60598-2-22, EN 7010 and EN 1838





More information



TECHNICAL DATA

| Luminaire type | Exit sign |
|------------------------|----------------------------|
| Mounting | Recessed wall mounting |
| Recognition distance | 30 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Zinc die-cast |
| Housing color | Stainless steel |
| Protection type (IP) | IP40 |
| Impact resistance (IK) | ≥ 3 |
| Certification | Waste disposal, CE, ENEC |
| Insulation class | 2 |
| Supply | Central power supply |
| Monitoring | ML |
| Bridging time | Central power supply |
| Operating mode | single luminaire switching |
| Input voltageAC | 230 V |
| Input frequency | 50 / 60 Hz |
| Input voltage DC | 216 V |
| Power max. | 4,5 W |
| Power DS | 4,5 W |






| Power BS | 1,1 W |
|--------------------------|---------------|
| Depth | 80 mm |
| Width | 344 mm |
| Height | 238 mm |
| Installation length | 176 mm |
| Installation width | 68 mm |
| Installation height | 40 mm |
| Weight | 1.73 |
| Weight incl. packaging | 2.22 |
| Connection cross-section | 2.5 mm² |
| Switching input | Yes |
| Emergency light blocking | No |
| Battery connection | No |
| Dimming function | Yes |
| Customs tariff number | 94056180 |
| Country of origin | DEUTSCHLAND |
| EAN | 4260581716080 |





TECHNICAL DRAWING

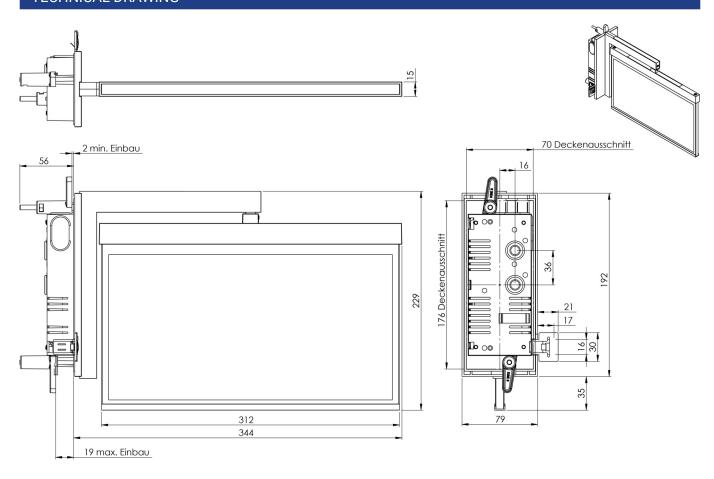

ACCESSORY LIST

AM-XBE -





RELATED PRODUCTS

| ArtNo. | lmage | Monitoring | Supply | Color | Investment | Automatic log | Maintenance level | Remote maintenance | max. Iuminaires | Single luminaire monitoring |
|------------------|------------|----------------|-------------------------|-------|------------|------------------|----------------------|-----------------------|---------------------|--------------------------------|
| AXRA009ML | 3 + | ML | Central power supply | | €€€ | Yes | low | Yes | 1,920 per system | central |
| AXRA009ML- AZ | | ML | Central power supply | | €€€ | Yes | low | Yes | 1,920 per system | central |
| AXRA509CC | * | CoreCompact 24 | Central power supply | | €€ | Yes | low | Yes | | central |
| AXRA509CC- AZ | * | CoreCompact 24 | Central power supply | | €€ | Yes | low | Yes | | central |
| AXRA509CC-E | | CoreCompact 24 | Central power supply | | €€ | Yes | low | Yes | | central |

As of: 27.06.2024 - Subject to technical changes and errors.