



Art.-Nr: C-MA-AP01

Remote display optical and acoustic for surface mounting in a compact design. It shows the status of the CoreCompact / CC24 system at a central location.


The visual display is via 3 LEDs. In the event of malfunctions, an acoustic message is also issued. The acoustic message can be acknowledged by pressing the "Signal tone OFF" button, whereby the error message (visual display) as such is not affected.




Więcej informacji

DANE TECHNICZNE

Stopień ochrony (IP)	IP40
Pobór mocy	1 W
Głębokość	81 mm
Szerokość	81 mm
Wysokość	55 mm
Waga	kg
Kod taryfy celnej	85389091
Kraj pochodzenia	DEUTSCHLAND



RYSUNEK TECHNICZNY

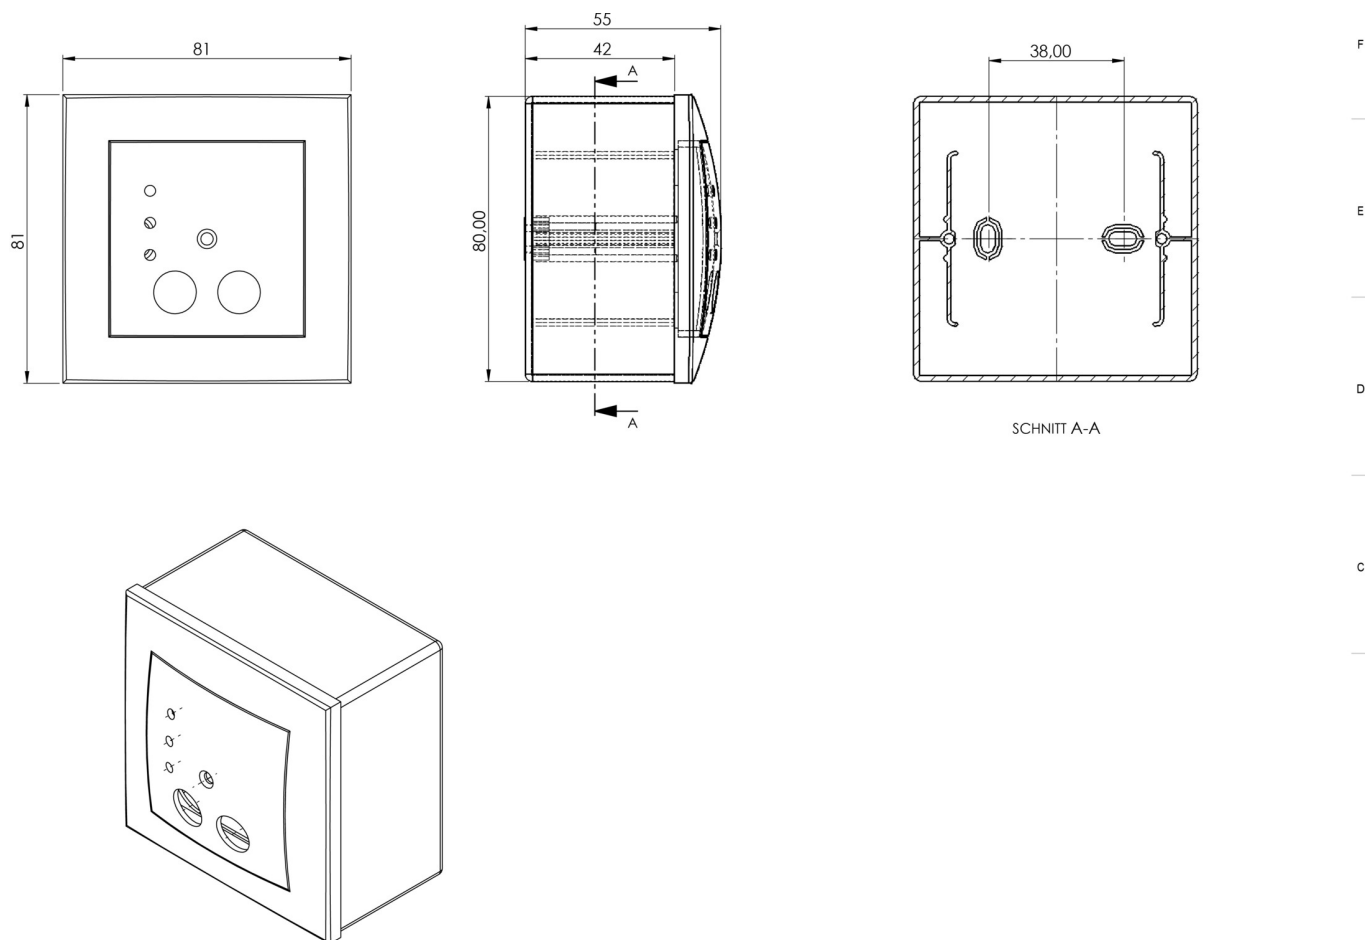

stand: 21.06.2024 - Zastrzega się prawo do zmian technicznych i błędów.