



Art.-Nr: EEQL539CC-AZ Safety luminaire Centralised power supply systems Ceiling mounting, CoreCompact 24, CPS, , IP20, Zinc diecast, Anthracite

LED safety light for illuminating escape and rescue routes according to DIN EN 60598-1, DIN EN 60598-222 and DIN EN 1838.

The recessed ceiling light made of zinc-aluminum adapts unobtrusively to the ceiling. In addition to conventional ceiling installation, it can also be installed in conventional and fire protection boxes. The status LED integrated into the lens does not interrupt the harmony of the housing. The use of diffuser lenses and powerful LED ERT technology achieves optimal light distribution and illumination of the escape and rescue routes. The innovative integrated lens carrier with quick-mounting device enables the flexible use of different lens types depending on the application. Round and corridor lenses are already included in the scope of delivery for each light.





More information



TECHNICAL DATA

Luminaire type	Safety luminaire				
Mounting	Ceiling mounting				
Pictograph	No				
Illuminant	LED				
Housing material	Zinc die-cast				
Housing color	Anthracite				
Protection type (IP)	IP20				
Impact resistance (IK)	≥ 3				
Certification	CE, WEEE				
Insulation class	2				
Supply	Centralised power supply systems				
Monitoring	CoreCompact 24				
Bridging time	CPS				
Operating mode	Standby circuit / permanent circuit				
Input voltageAC	24 V				
Power max.	3,1 W				
Power DS	3,1 W				






Power BS	0,4 W
Depth	88 mm
Width	88 mm
Height	4 mm
Installation dimensions Diameter	68 mm
Weight	0.63
Weight incl. packaging	0.76
Connection cross-section	2.5 mm²
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Luminous flux mains	450 lm
Luminous flux emergency	450 lm
Customs tariff number	94056180
Country of origin	DEUTSCHLAND
EAN	4260766552250





TECHNICAL DRAWING

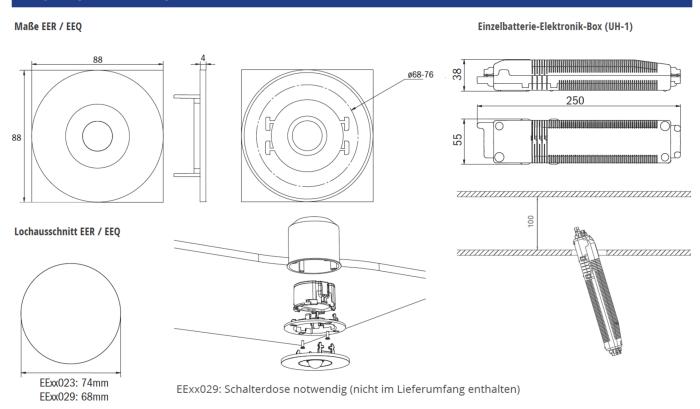

ACCESSORY LIST

LSYS-B4 -

LSYS-F4 -

LSYS-R4 -

LSYS-S4 -





RELATED PRODUCTS

ArtNo.	lmage	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. Iuminaires	Single luminaire monitoring
EEQL039ML	Flexi dicke	ML	Central power supply		€€€	Yes	low	Yes	1,920 per system	central
EEQL039ML- AZ	Flexi click	ML	Central power supply		€€€	Yes	low	Yes	1,920 per system	central
EEQL539CC	Flexi click	CoreCompact 24	Central power supply		€€	Yes	low	Yes		central

As of: 09.07.2024 - Subject to technical changes and errors.