



Art.-Nr: FLU30ML

Safety luminaire Central power supply

Universal, ML, Central power supply, , IP66, Zinc die-cast, Anthracite

Robust ceiling-mounted Aluminium die-cast luminaire for the lighting of escape and rescue routes according to DIN EN 60598-1, DIN EN 605982-22 and EN 1838.

The IP66 flood light is suitable for indoor and outdoor use. Due to the wide beam angle, large areas can be easily illuminated. The MU05 monitoring module is installed in the supplied separate housing.



[More information](#)



TECHNICAL DATA


Luminaire type	Safety luminaire
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Zinc die-cast
Housing color	Anthracite
Protection type (IP)	IP66
Impact resistance (IK)	8
Certification	CE, Waste disposal
Insulation class	1
Supply	Central power supply
Monitoring	ML
Bridging time	Central power supply
Operating mode	Standby circuit
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	216 V
Power max.	31,5 W




Power DS	31,5 W
Power BS	1,5 W
Depth	196 mm
Width	183 mm
Height	37 mm
Weight	4.7
Weight incl. packaging	4.7
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	No
Luminous flux mains	4200 lm
Luminous flux emergency	4200 lm
Customs tariff number	94054210
Country of origin	CHINA
EAN	4260682159786



TECHNICAL DRAWING

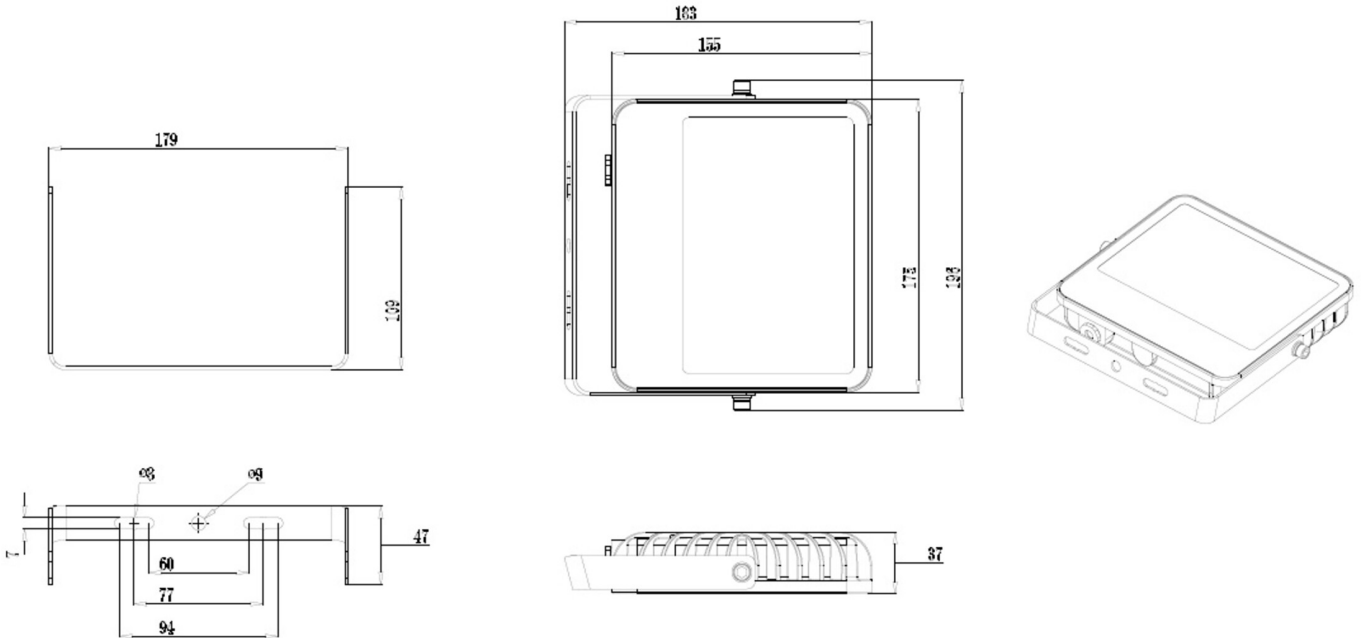

Maße MU05-BOX

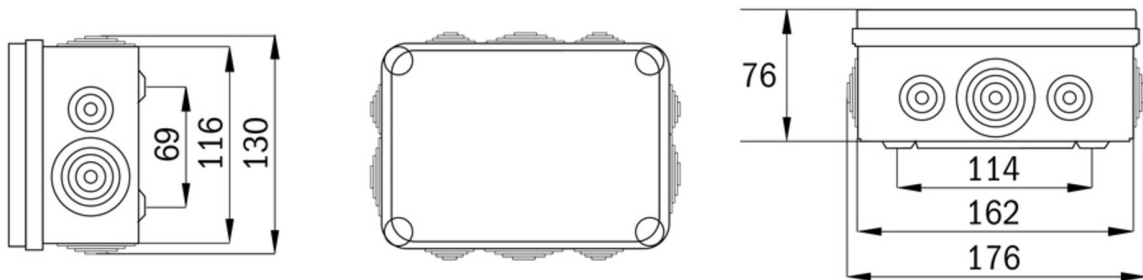

ACCESSORY LIST

MU05-BOX -



RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
FLU10ML		ML	Central power supply		€€€	Yes	low	Yes	1,920 per system	central
FLU50ML		ML	Central power supply		€€€	Yes	low	Yes	1,920 per system	central

As of: 29.06.2024 - Subject to technical changes and errors.