



Art.-Nr: FMDS029

**Safety luminaire Centralised power supply systems
Recessed mounting, Without monitoring, CPS, , IP65, Zinc
die-cast, white**

Robust zinc die-cast safety luminaire for mounting on the ceiling and for illuminating escape and emergency routes.



More information

www.rp-group.com/en/item/FMDS029




TECHNICAL DATA

Luminaire type	Safety luminaire
Mounting	Recessed mounting
Pictograph	No
Housing material	Zinc die-cast
Housing color	white
Protection type (IP)	IP65
Impact resistance (IK)	8
Certification	WEEE, CE, D-Sign
Insulation class	1
Supply	Centralised power supply systems
Monitoring	Without monitoring
Bridging time	CPS
Battery	/
Operating mode	Permanent circuit
Input voltageAC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	100-254 V
Power max.	4,6 W
Power DS	4,6 W
Power BS	0 W
Ambient temperature DS	-25 °C - 40 °C



Ambient temperature BS	-25 °C - 40 °C
Depth	58 mm
Width	262 mm
Height	188 mm
Weight	1.93
Weight incl. packaging	2.03
Connection cross-section	1.5 mm ²
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	No
Luminous flux mains	520 lm
Luminous flux emergency	520 lm
Customs tariff number	94056180
EAN	4260581717674

TECHNICAL DRAWING

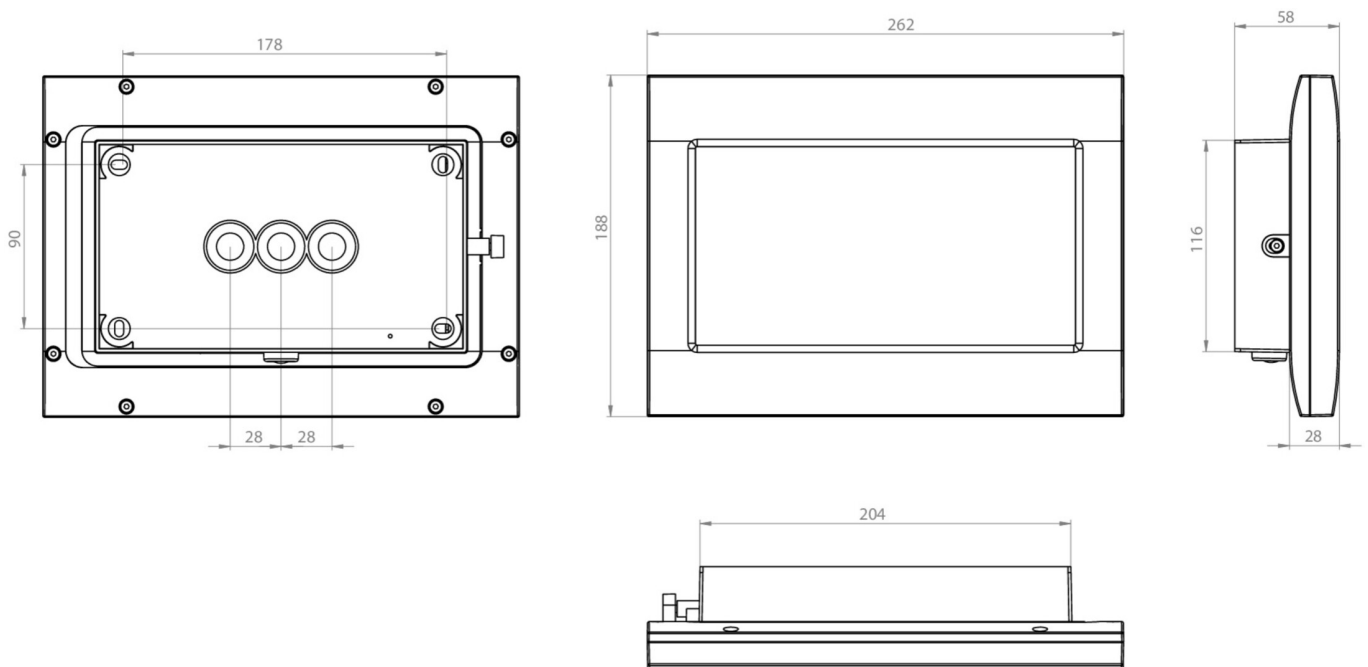



ACCESSORY LIST

FMDA001 -

FMDA002 -

FMDA001-AZ -

FMDA002-AZ -

FMWA001 -

FMFH -

As of: 11.10.2024 - Subject to technical changes and errors.