



**Art.-Nr: GABD009ML**

**Exit sign Centralised power supply systems**

**Recessed mounting, Central power supply (ML), CPS, 40 m, IP40, Plastic, white**

Emergency exit sign luminaire with plastic pane for surface mounting on the ceiling and for identifying emergency and escape routes. It is based on the design of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design. The luminaires are equipped with modern LED illuminants and provide flexibility through their interchangeable pictograms.

Control and monitoring via central power supply system. Two requested pictograms (arrow to the right, left, up, down or white) are supplied as standard.



More information

[www.rp-group.com/en/item/GABD009ML](http://www.rp-group.com/en/item/GABD009ML)



## TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Recessed mounting
Recognition distance	40 m
Pictograph	acc. to Specification
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP40
Impact resistance (IK)	5
Certification	WEEE, CE
Insulation class	2
Supply	Centralised power supply systems
Monitoring	Central power supply (ML)
Bridging time	CPS
Battery	/
Operating mode	single luminaire switching
Input voltageAC	230 V
Input frequency	50 / 60 Hz



Input voltage DC	216 V
Power max.	4,6 W
Power DS	4,6 W
Power BS	1,1 W
Ambient temperature DS	-5 °C - 55 °C
Ambient temperature BS	-5 °C - 55 °C
Depth	80.9 mm
Width	417.5 mm
Height	245.5 mm
Weight	1.27
Weight incl. packaging	1.92
Connection cross-section	2.5 mm <sup>2</sup>
Switching input	Yes
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Customs tariff number	94056120
EAN	4260766551062



## TECHNICAL DRAWING

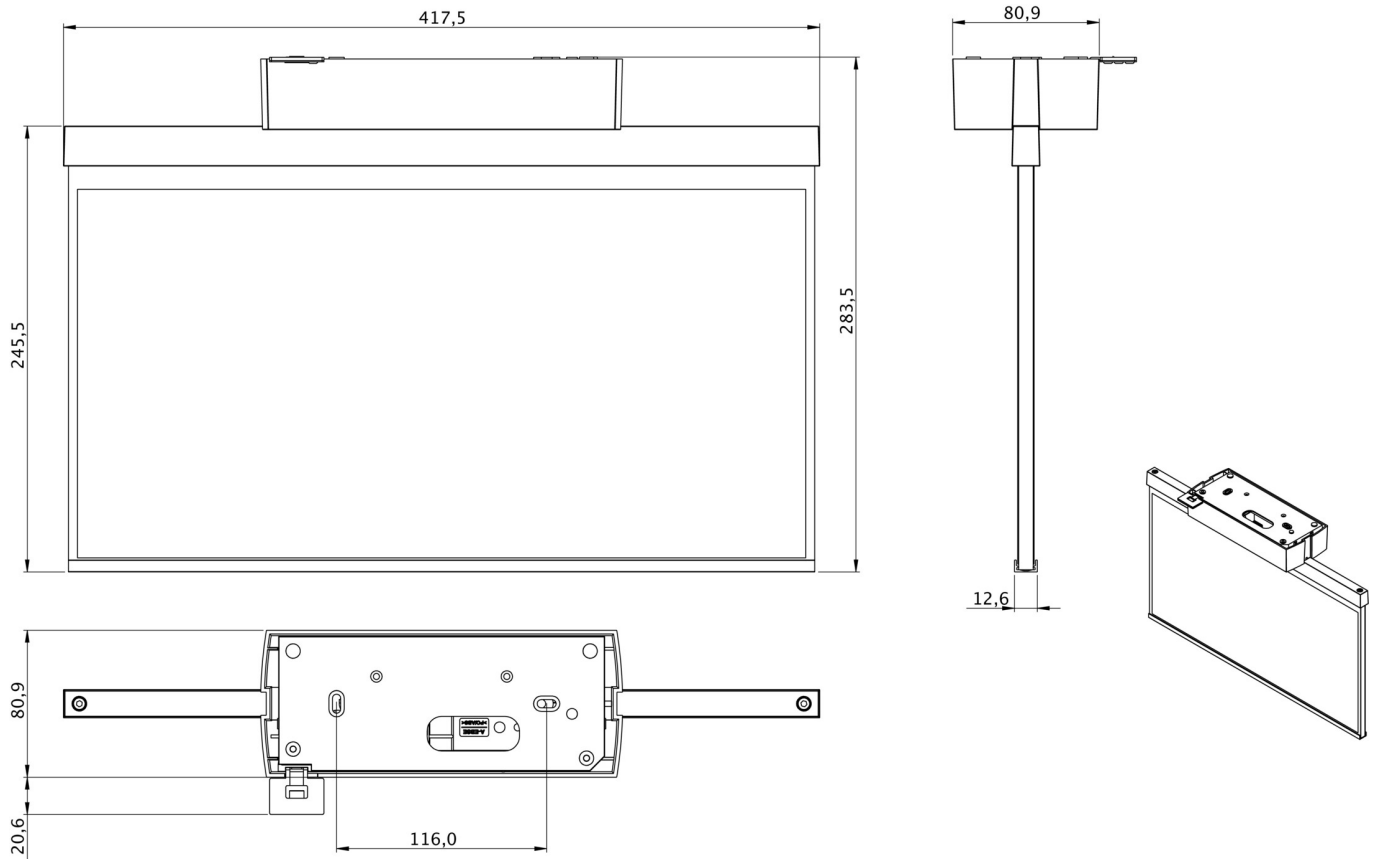

As of: 11.10.2024 - Subject to technical changes and errors.