



Art.-Nr: KAMU401SC

Cuboid polycarbonate luminaire design, discreetly reduced to the essentials. The design and universal installation is based on the KB luminaire, whereby the edge for holding the escape sign is permanently installed. The luminaires are equipped with modern LED lighting devices and offer flexibility through interchangeable pictograms.

LED escape sign luminaire according to DIN EN 60598-1, DIN EN 60598-2-22, DIN EN 7010 and DIN EN 1838.

Automatic monitoring of the emergency light with SelfControl. Display edge luminaire with integrated light distribution for uniform illumination of the pictogram. Suitable for single or double-sided labelling. Tool-free, variable use of the pictograms on site ensures reliable planning. A pictogram set in accordance with DIN ISO 7010 (right, left, up and down arrows) is included as standard.



More information

www.rp-group.com/en/item/KAMU401SC




TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Universal
Recognition distance	22 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP64
Impact resistance (IK)	7
Certification	WEEE, CE
Insulation class	2
Monitoring	SelfControl
Bridging time	1 h
Battery	6,4 V 1,2 Ah/
Power max.	4,3 W
Power DS	3,5 W
Power BS	0,9 W



Ambient temperature DS	-5 °C - 40 °C
Ambient temperature BS	-5 °C - 40 °C
Depth	326 mm
Width	50 mm
Height	204 mm
Weight	0.16
Weight incl. packaging	0.36
Customs tariff number	94056120
EAN	4260766551451

TECHNICAL DRAWING

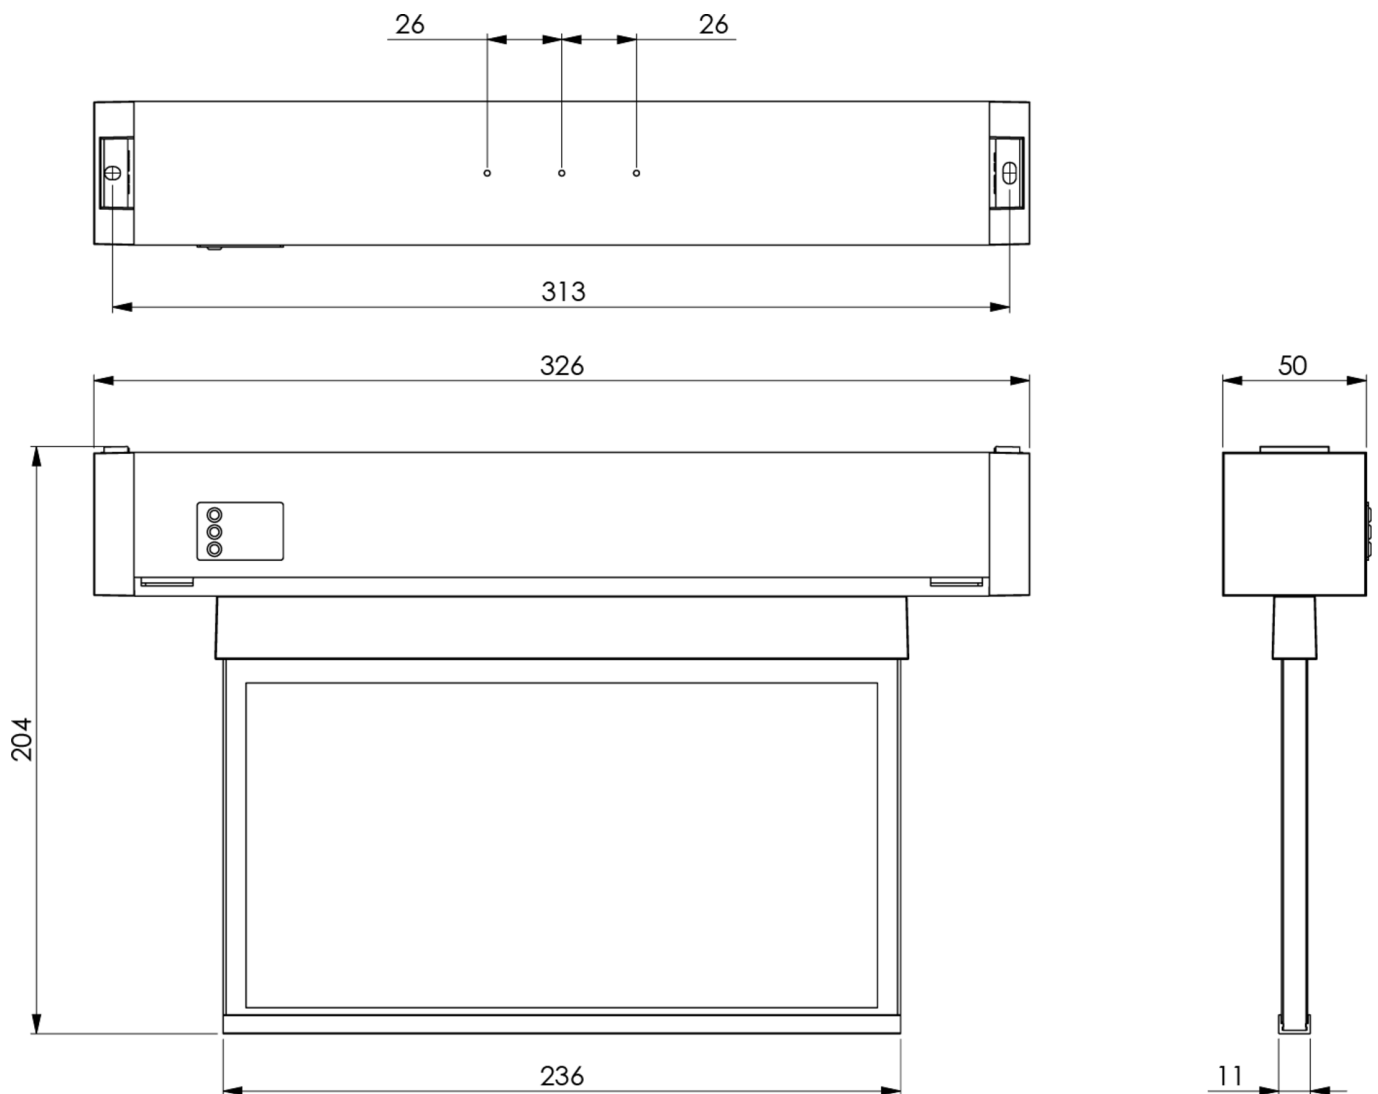

As of: 04.09.2024 - Subject to technical changes and errors.