



Art.-Nr: KAXU401SC

Cuboid polycarbonate luminaire design, discreetly reduced to the essentials. The design and universal installation is based on the KB luminaire, whereby the edge for holding the escape sign is permanently installed. The luminaires are equipped with modern LED lighting devices and offer flexibility through interchangeable pictograms.

LED escape sign luminaire according to DIN EN 60598-1, DIN EN 60598-2-22, DIN EN 7010 and DIN EN 1838.

Automatic monitoring of the emergency light with SelfControl. Display edge luminaire with integrated light distribution for uniform illumination of the pictogram. Suitable for single or double-sided labelling. Tool-free, variable use of the pictograms on site ensures reliable planning. A pictogram set in accordance with DIN ISO 7010 (right, left, up and down arrows) is included as standard.



More information
www.rp-group.com/en/item/KAXU401SC



TECHNICAL DATA


| Luminaire type | Exit sign |
|------------------------|---------------|
| Mounting | Universal |
| Recognition distance | 30 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Plastic |
| Housing color | white |
| Protection type (IP) | IP64 |
| Impact resistance (IK) | 7 |
| Certification | CE, WEEE |
| Insulation class | 2 |
| Monitoring | SelfControl |
| Bridging time | 1 h |
| Battery | 6,4 V 1,2 Ah/ |
| Power max. | 4,2 W |
| Power DS | 3,4 W |
| Power BS | 0,9 W |



| | |
|------------------------|---------------|
| Ambient temperature DS | -5 °C - 40 °C |
| Ambient temperature BS | -5 °C - 40 °C |
| Depth | 326 mm |
| Width | 50 mm |
| Height | 248 mm |
| Weight | 0.16 |
| Weight incl. packaging | 0.36 |
| Customs tariff number | 94056120 |
| EAN | 4260766551567 |



TECHNICAL DRAWING

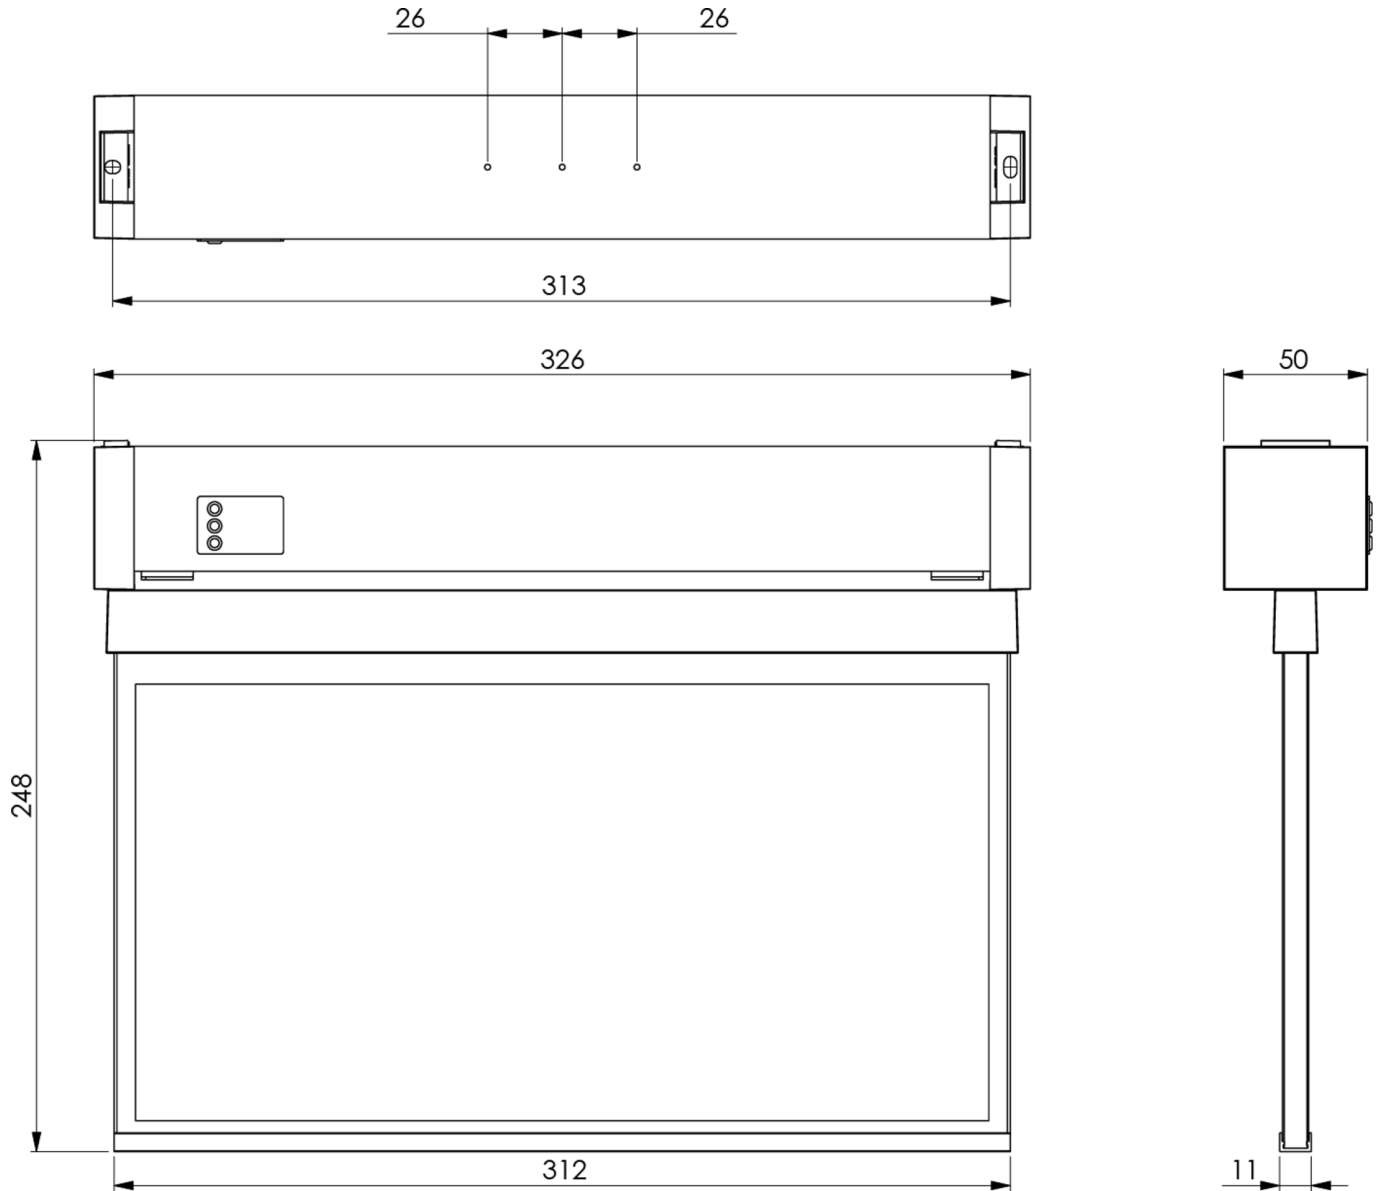

As of: 04.09.2024 - Subject to technical changes and errors.