



Art.-Nr: KBM-RZL

**Exit sign Centralised power supply systems
Universal, CPS, 8 h, 22 m, IP64, Plastic, white**

Picto-Plate to mark the exit sign. As supplement to the KB escape route luminaire. Universal pictogram set (left, right, up, down) included.



[More information](#)




TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Universal
Recognition distance	22 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP64
Impact resistance (IK)	5
Certification	WEEE, TÜV Rheinland Type approved, CE, ENEC
Insulation class	2
Supply	Centralised power supply systems
Monitoring	CPS
Bridging time	8 h
Operating mode	Standby circuit / permanent circuit
Ambient temperature DS	-5 °C - 35 °C
Ambient temperature BS	-5 °C - 35 °C
Depth	326 mm
Width	50 mm
Height	50 mm
Weight	0.3
Weight incl. packaging	0.35
Customs tariff number	94059200



TECHNICAL DRAWING

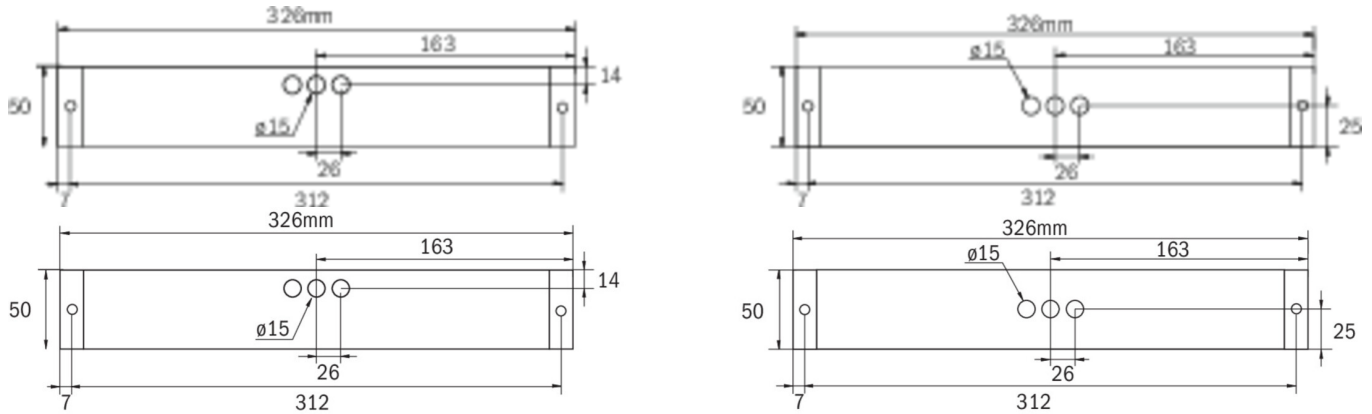

ACCESSORY LIST

KBK -
KBM -
KBG -
AWX001 -
KBE -
BALLPLX-KBE -
BALLPLX-KBS -
BALLPLX-KBU -
2PW-EB -
2DW-EB -
KBBE -
DSA -

As of: 11.07.2024 - Subject to technical changes and errors.