



**Art.-Nr: KCW411SC-IP64**

**Exit sign Supply**

**Wall, SelfControl, 1 h, 30 m, IP64, Plastic, white**

Slightly curved high-grade exit sign and emergency luminaire in polycarbonate for wall mounting. Signage with pluggable, solvent-free, internally mounted pictogram. Pictogram set included. This luminaire can be used without pictogram as an emergency lighting luminaire with a clear cover. Escape route/Exit sign/emergency luminaire according to EN 60598-1, EN 60598-2-22 and EN 1838 norms.



More information




**TECHNICAL DATA**

Luminaire type	Exit sign
Mounting	Wall
Recognition distance	30 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP64
Impact resistance (IK)	6
Certification	WEEE, CE
Insulation class	2
Monitoring	SelfControl
Bridging time	1 h
Power max.	5,5 W
Power DS	4,6 W
Power BS	0,4 W
Ambient temperature DS	-5 °C - 40 °C
Ambient temperature BS	-5 °C - 40 °C
Depth	60 mm
Width	340 mm
Height	170 mm



Weight	0.79
Weight incl. packaging	0.88
Luminous flux mains	320 lm
Luminous flux emergency	320 lm
Customs tariff number	94056120
EAN	4260766553394

## TECHNICAL DRAWING

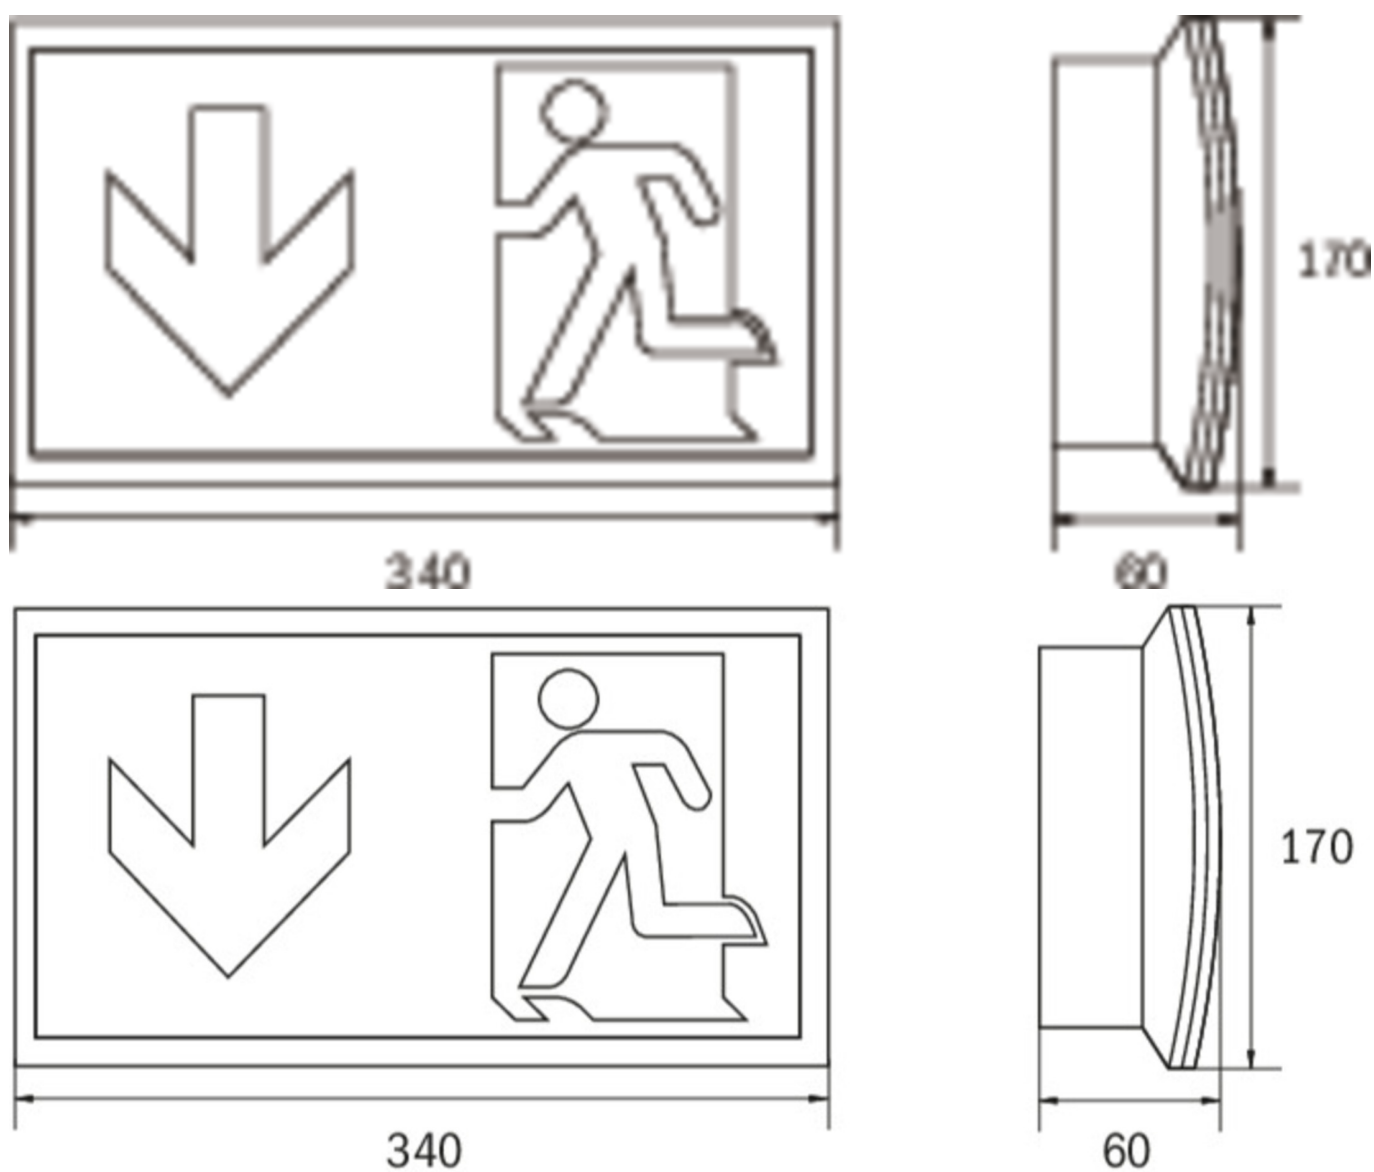



## ACCESSORY LIST

BALL2 -  
DWKCW -  
KC-IP65 -  
KCER -  
KCWFH -

As of: 10.07.2024 - Subject to technical changes and errors.