



**Exit sign, Safety luminaire Centralised power supply systems  
Wall mounting, CoreCompact 24 (CC), CPS, 30 m, IP54,  
Plastic, white**

Or without the use of pictograms as a safety luminaire with the crystal-clear cover included, preferably for ceiling mounting.



[www.rp-group.com/en/item/KCW519CC-IP65](http://www.rp-group.com/en/item/KCW519CC-IP65)




Luminaire type	Exit sign, Safety luminaire
Mounting	Wall mounting
Recognition distance	30 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP54
Impact resistance (IK)	6
Certification	WEEE, CE, ENEC, TÜV Rheinland Type approved
Insulation class	3
Supply	Centralised power supply systems
Monitoring	CoreCompact 24 (CC)
Bridging time	CPS



Battery	/
Operating mode	Standby circuit / permanent circuit
Input voltageAC	24 V
Power max.	4,2 W
Power DS	4,2 W
Power BS	0,4 W
Ambient temperature DS	-5 °C - 40 °C
Ambient temperature BS	-5 °C - 40 °C
Depth	60 mm
Width	340 mm
Height	170 mm
Weight	0.62
Weight incl. packaging	0.71
Connection cross-section	2.5 mm <sup>2</sup>
Switching input	No
Emergency light blocking	No
Battery connection	No
Luminous flux mains	335 lm
Luminous flux emergency	335 lm
Customs tariff number	94056120
EAN	4260682157287



## TECHNICAL DRAWING

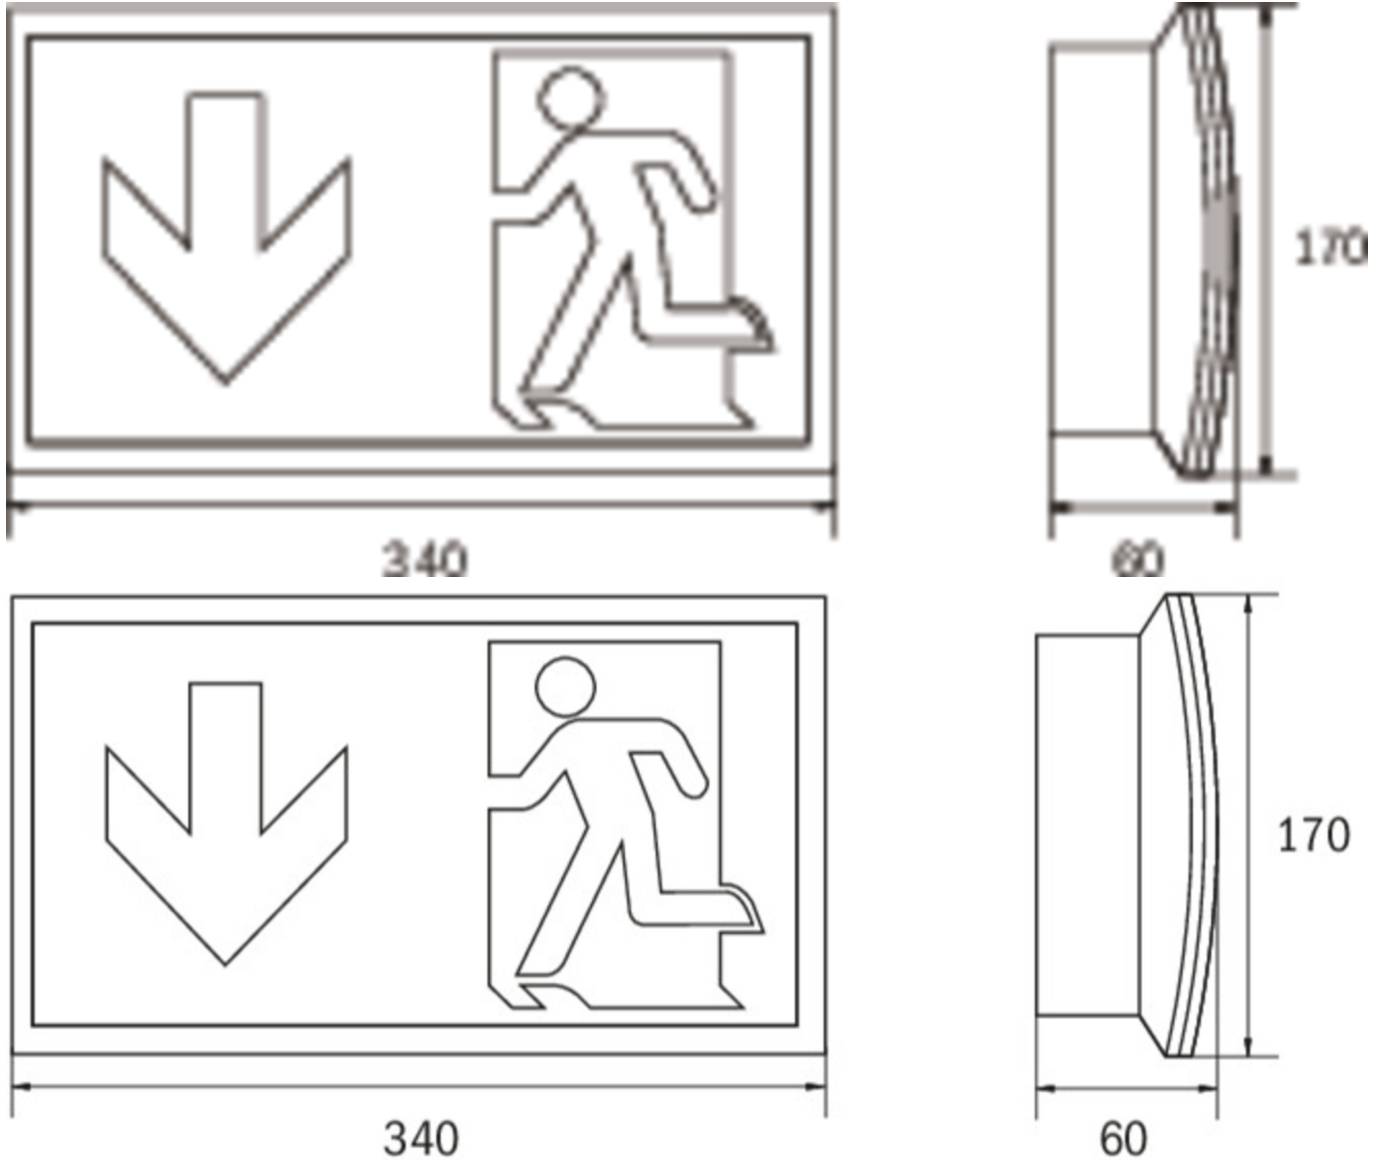

## ACCESSORY LIST

- BALL2 - Wire mesh guard
- DWKCW -
- KC-IP65 -
- KCER - Mounting frame
- KCWFH - Wall holder

As of: 10.10.2024 - Subject to technical changes and errors.