



**Art.-Nr: KDU019ML**

**Exit sign Central power supply**

**Universal, ML, Central power supply, 22 m, IP43, Plastic, white**

Slim design high-grade plastic luminaire for universal mounting (wall/ ceiling or eventual at wall bracket through supplied adapter). This luminaire provides additional downward lighting to enhance safety at the egress route. Applicable for maintained or non-maintained operation mode. Improved reliability through being easy to install and the universal use of pictograms. Signs according to EN 60598-1, EN 60598-2-22 and EN 1838 norms.



More information




## TECHNICAL DATA

| Luminaire type         | Exit sign   |
|------------------------|---|
| Mounting               | Universal   |
| Recognition distance   | 22 m  |
| Pictograph             | Set   |
| Illuminant             | LED   |
| Housing material       | Plastic   |
| Housing color          | white   |
| Protection type (IP)   | IP43  |
| Impact resistance (IK) | 3   |
| Certification          | Waste disposal, CE, TÜV Rheinland Type approved, ENEC |
| Insulation class       | 2   |
| Supply                 | Central power supply                                  |
| Monitoring             | ML  |
| Bridging time          | Central power supply                                  |
| Operating mode         | single luminaire switching                            |
| Input voltage AC       | 230 V   |
| Input frequency        | 50 / 60 Hz  |
| Input voltage DC       | 216 V   |
| Power max.             | 5,2 W   |
| Power DS               | 5,2 W   |
| Power BS               | 1,1 W   |



|                          |                     |
|--------------------------|---------------------|
| Depth                    | 70 mm               |
| Width                    | 260 mm              |
| Height                   | 155 mm              |
| Weight                   | 0.7                 |
| Weight incl. packaging   | 0.9                 |
| Connection cross-section | 2.5 mm <sup>2</sup> |
| Switching input          | Yes                 |
| Emergency light blocking | No                  |
| Battery connection       | No                  |
| Dimming function         | Yes                 |
| Luminous flux mains      | 300 lm              |
| Luminous flux emergency  | 300 lm              |
| Customs tariff number    | 94056120            |
| Country of origin        | DEUTSCHLAND         |
| EAN                      | 4260123681661       |

## TECHNICAL DRAWING

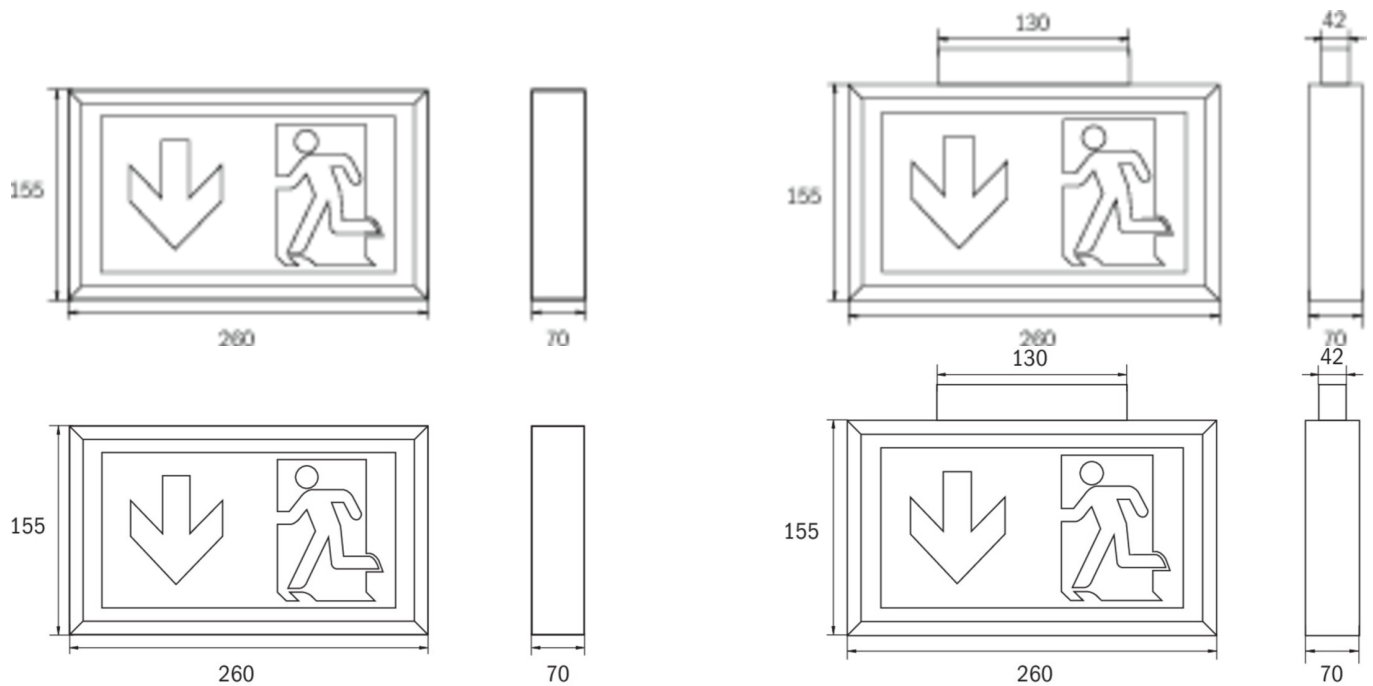



## ACCESSORY LIST

DSA -  
BALL1 -  
2PW-EB -  
2DW-EB -  
BALLPLX-KD -

## RELATED PRODUCTS

| Art.-No. | Image | Monitoring     | Supply               | Color | Investment | Automatic log | Maintenance level | Remote maintenance | max. luminaires | Single luminaire monitoring |
|----------|-------|----------------|----------------------|-------|------------|---------------|-------------------|--------------------|-----------------|-----------------------------|
| KDU519CC |       | CoreCompact 24 | Central power supply |       | €€         | Yes           | low               | Yes                |                 | central                     |

As of: 28.06.2024 - Subject to technical changes and errors.