



Art.-Nr: KDU019ML

Utgangsskilt lys sentral strømforsyning

Universell, ML, sentral strømforsyning, 22 m, IP43, plast, hvit

Slim design high-grade plastic luminaire for universal mounting (wall/ ceiling or eventual at wall bracket through supplied adapter). This luminaire provides additional downward lighting to enhance safety at the egress route. Applicable for maintained or non-maintained operation mode. Improved reliability through being easy to install and the universal use of pictograms. Signs according to EN 60598-1, EN 60598-2-22 and EN 1838 norms.



Mer informasjon




TEKNISKE DATA

Type armatur	Utgangsskilt lys
Monteringstype	Universell
Deteksjonsområde	22 m
piktogram	sett
Lyspærer	LED
Koffertmateriale	plast
Farge på huset	hvit
IP-beskyttelse)	IP43
Slagstyrke (IK)	3
Sertifisering	Søppeltømming, CE, TÜV Rheinland designtestet, ENEC
beskyttelses klasse	2
omsorg	sentral strømforsyning
overvåkning	ML
Brotid	sentral strømforsyning
Driftsmodus	Individuell lysveksling
Inngangsspenning AC	230 V
Inngangsfrekvens	50/60 Hz
Inngangsspenning DC	216 V
Maks effekt.	5,2 W
Ytelse DS	5,2 W
Ytelse BS	1,1 W



dybde	70 mm
Bredde	260 mm
Høyde	155 mm
Vekt	0.7
Vekt inkludert emballasje	0.9
Tverrsnitt for tilkobling	2.5 mm ²
Koblingsinngang	Ja
Blokkering av nødlys	Nei
Batteritilkobling	Nei
Dimmefunksjon	Ja
Lysstrømnettverk	300 lm
Lysstrøm nødsituasjon	300 lm
Tolltariffnummer	94056120
Opprinnelsesland	DEUTSCHLAND
EAN	4260123681661

TEKNISK TEGNING

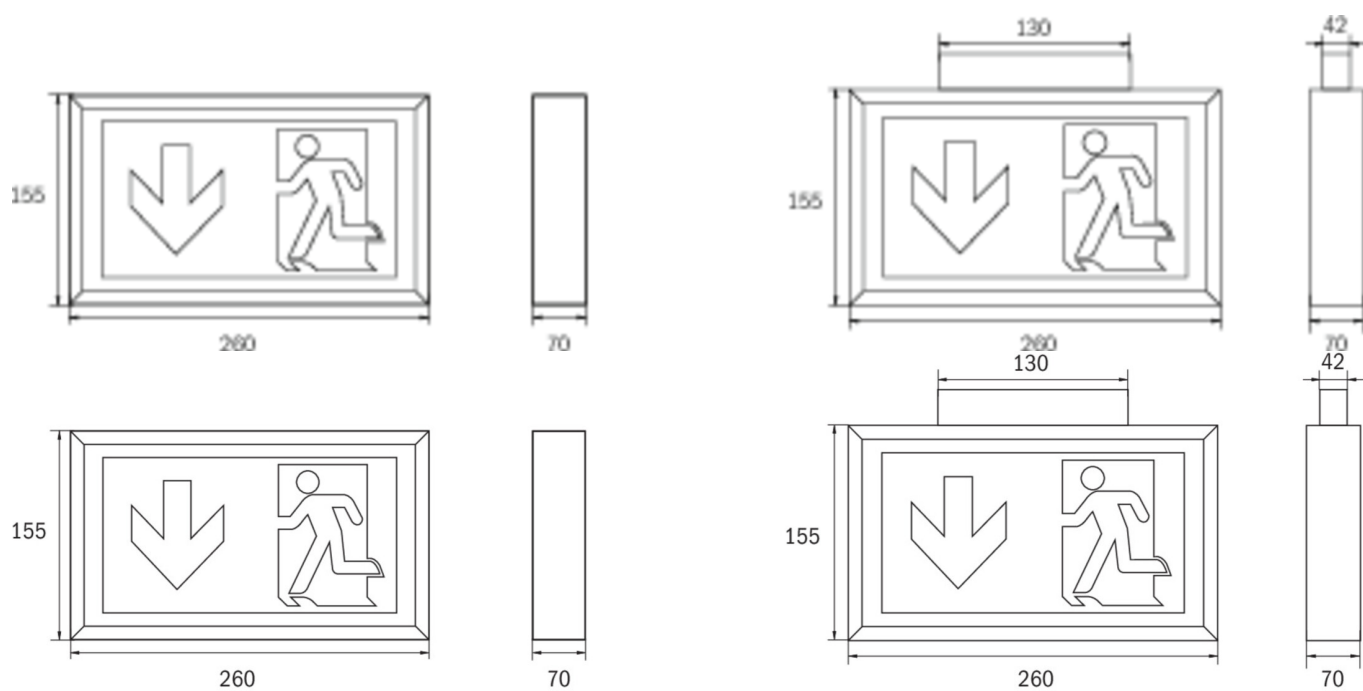



TILBEHØRSLISTE

DSA -
BALL1 -
2PW-EB -
2DW-EB -
BALLPLX-KD -

LIGNENDE PRODUKTER

Varenr.	Bilde	overvåkning	omsorg	Farge	investering	Automatisk inspeksjonsbok	Vedlikeholdsinnsats	fjernvedlikehold	maks. lys	Individuell lysovervåking
KDU519CC		CoreCompact 24	Sentral strømforsyning		€€	Ja	lav	Ja		sentralt

Fra: 28.06.2024 - Det tas forbehold om tekniske endringer og feil.