



**Art.-Nr: KDU413SC**

**Exit sign**

**Universal, SelfControl, 3 h, 22 m, IP43, Plastic, white**

Slim design high-grade plastic luminaire for universal mounting (wall/ ceiling or eventual at wall bracket through supplied adapter). This luminaire provides additional downward lighting to enhance safety at the egress route. Applicable for maintained or non-maintained operation mode. Improved reliability through being easy to install and the universal use of pictograms. Signs according to EN 60598-1, EN 60598-2-22 and EN 1838 norms.



More information




## TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Universal
Recognition distance	22 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP43
Impact resistance (IK)	3
Certification	WEEE, CE
Insulation class	2
Monitoring	SelfControl
Bridging time	3 h
Battery	LiFePO4 - 2 pcs - 3,2 V /1200mAh LiFePO4 - Lithium Iron Phosphate Battery
Power max.	4,3 W
Power DS	3,5 W
Power BS	0,9 W
Ambient temperature DS	-5 °C - 40 °C
Ambient temperature BS	-5 °C - 40 °C
Depth	70 mm
Width	260 mm



Height	155 mm
Weight	0.78
Weight incl. packaging	0.98
Customs tariff number	94056120
EAN	4260766553578

## TECHNICAL DRAWING

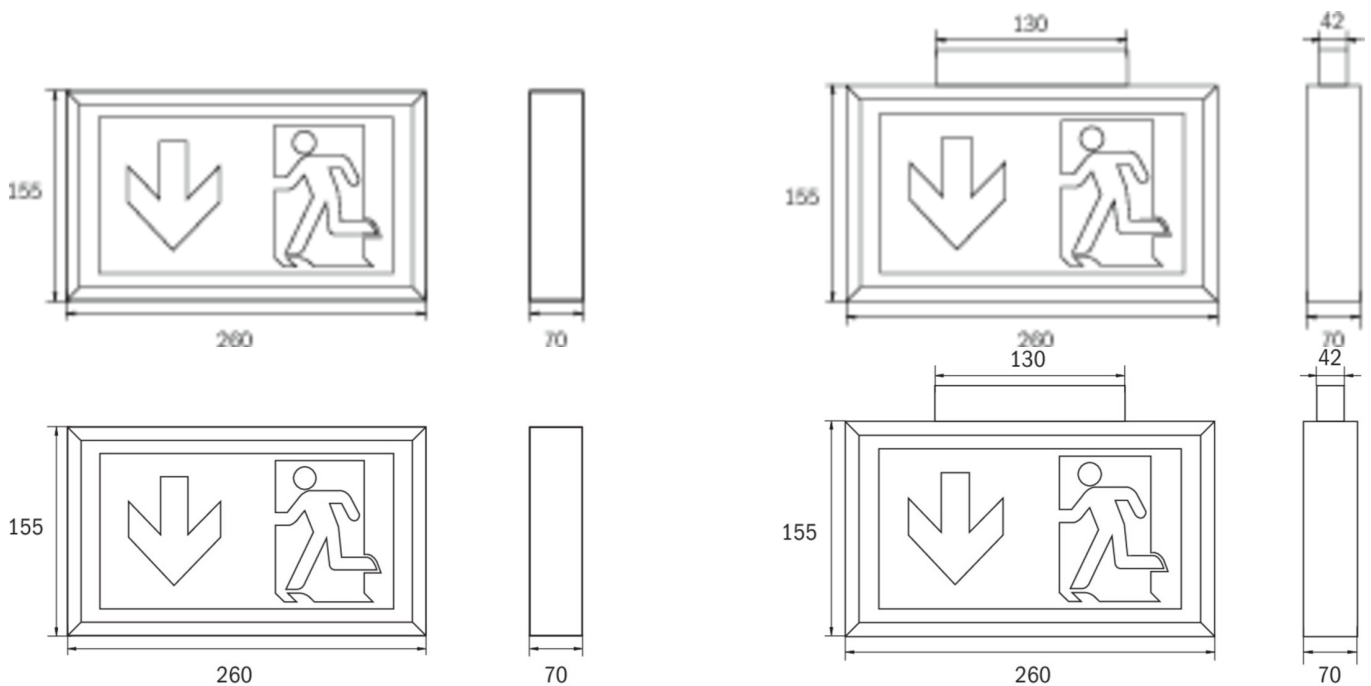

## ACCESSORY LIST

DSA -  
BALL1 -  
2PW-EB -  
2DW-EB -  
BALLPLX-KD -

As of: 10.07.2024 - Subject to technical changes and errors.