



**Art.-Nr: KDU413WL**  
**Exit sign Single Battery**  
**Universal, Wireless Professional, 3 h, 22 m, IP43, Plastic, white**

Slim design high-grade plastic luminaire for universal mounting (wall/ ceiling or eventual at wall bracket through supplied adapter). This luminaire provides additional downward lighting to enhance safety at the egress route. Applicable for maintained or non-maintained operation mode. Improved reliability through being easy to install and the universal use of pictograms. Signs according to EN 60598-1, EN 60598-2-22 and EN 1838 norms.



More information




## TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Universal
Recognition distance	22 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP43
Impact resistance (IK)	3
Certification	WEEE, CE
Insulation class	2
Supply	Single Battery
Monitoring	Wireless Professional
Bridging time	3 h
Battery	LiFePO4 - 2 pcs - 3,2 V /1200mAh LiFePO4 - Lithium Iron Phosphate Battery
Operating mode	Standby circuit / permanent circuit
Input voltageAC	230 V
Input frequency	50 Hz
Power max.	4,7 W
Power DS	3,5 W



Power BS	0,8 W
Depth	70 mm
Width	260 mm
Height	155 mm
Weight	0.85
Weight incl. packaging	1.05
Connection cross-section	2.5 mm <sup>2</sup>
Switching input	Yes
Emergency light blocking	Yes
Battery connection	Connector
Dimming function	Yes
Customs tariff number	94056120
Country of origin	DEUTSCHLAND
EAN	4262483020869

## TECHNICAL DRAWING

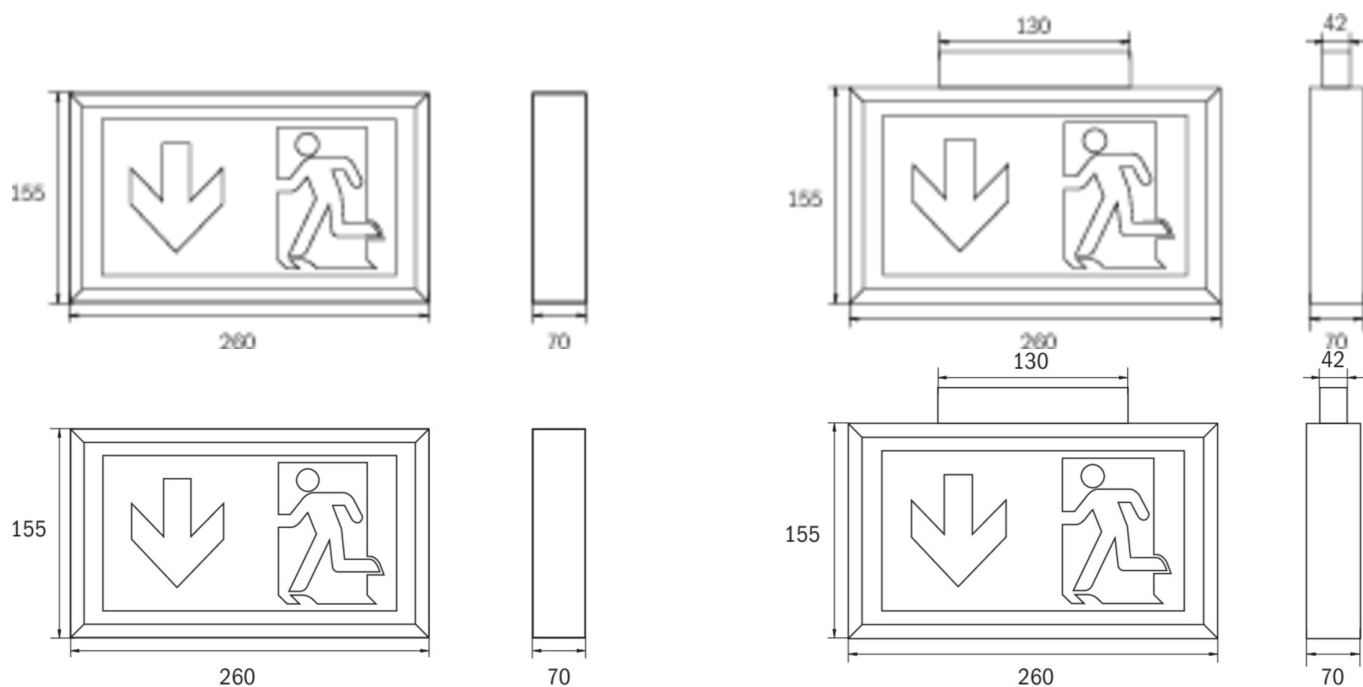



## ACCESSORY LIST

DSA -  
BALL1 -  
2PW-EB -  
2DW-EB -  
BALLPLX-KD -

As of: 08.07.2024 - Subject to technical changes and errors.