



Art.-Nr: KEU019ML

Safety luminaire Central power supply

Universal, ML, Central power supply, , IP40, Plastic, white

Compact polycarbonate luminaire with ERT-LED for universal mounting and for the lighting of escape and rescue routes according to DIN EN 605981, DIN EN 60598-2-22 and EN 1838. Available for central power systems or as a self-contained luminaire. Also available as ERT luminaire with improved illumination. Plastic, white, IP40 Universal mounting (incl.: wall (W), ceiling (D), wall bracket)



[More information](#)




TECHNICAL DATA

Luminaire type	Safety luminaire
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	Waste disposal, CE, TÜV Rheinland Type approved, ENEC
Insulation class	2
Supply	Central power supply
Monitoring	ML
Bridging time	Central power supply
Operating mode	single luminaire switching
Input voltageAC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	216 V
Power max.	5,2 W
Power DS	5,2 W
Power BS	1,1 W
Depth	332 mm
Width	48 mm



Height	72 mm
Weight	0.37
Weight incl. packaging	0.41
Connection cross-section	2.5 mm ²
Switching input	Yes
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Luminous flux mains	300 lm
Luminous flux emergency	300 lm
Customs tariff number	94056120
Country of origin	DEUTSCHLAND
EAN	4260123687113

TECHNICAL DRAWING

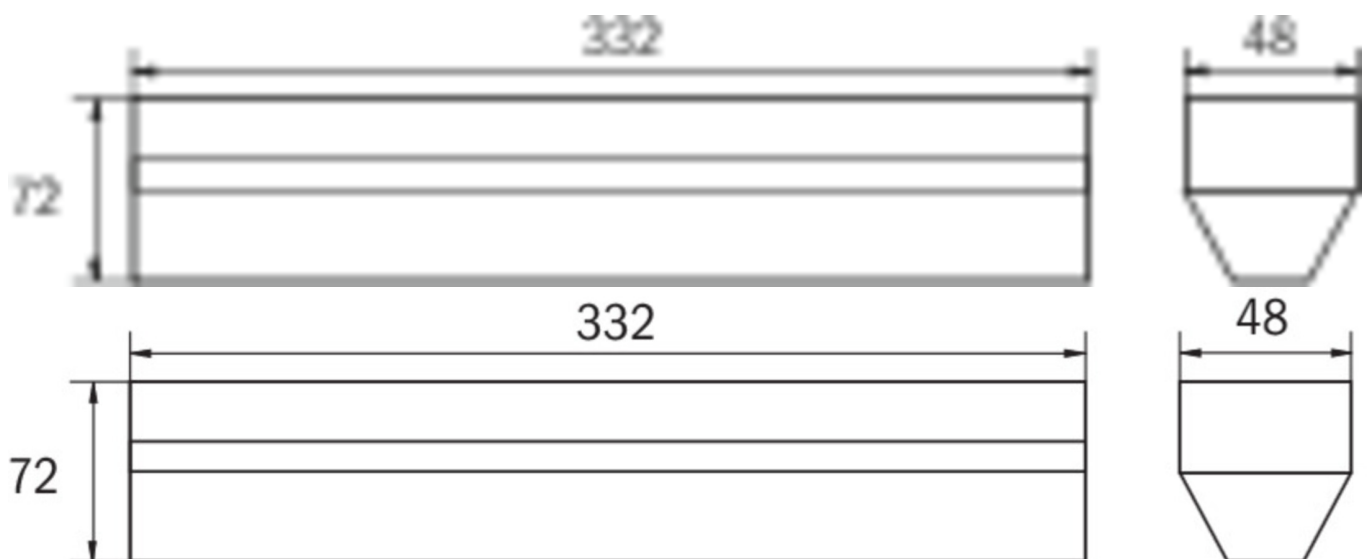



ACCESSORY LIST

DSA -
KEE-EB -
2PW-EB -
2DW-EB -
KXBE -

RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring

As of: 29.06.2024 - Subject to technical changes and errors.