



**Art.-Nr: KEU029**

**Safety luminaire Centralised power supply systems  
Universal, CPS, CPS, , IP40, Plastic, white**

Compact polycarbonate luminaire with ERT-LED for universal mounting and for the lighting of escape and rescue routes according to DIN EN 605981, DIN EN 60598-2-22 and EN 1838. Available for central power systems or as a self-contained luminaire. Also available as ERT luminaire with improved illumination. Plastic, white, IP40 Universal mounting (incl.: wall (W), ceiling (D), wall bracket)



[More information](#)




## TECHNICAL DATA

Luminaire type	Safety luminaire
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	WEEE, CE, TÜV Rheinland Type approved, ENEC
Insulation class	2
Supply	Centralised power supply systems
Monitoring	CPS
Bridging time	CPS
Operating mode	Permanent circuit
Input voltageAC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	100-254 V
Power max.	4,6 W
Power DS	4,6 W
Power BS	0 W
Depth	332 mm
Width	48 mm



Height	72 mm
Weight	0.36
Weight incl. packaging	0.4
Connection cross-section	1.5 mm <sup>2</sup>
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	No
Luminous flux mains	520 lm
Luminous flux emergency	520 lm
Customs tariff number	94056120
Country of origin	DEUTSCHLAND
EAN	4260123682613

#### TECHNICAL DRAWING

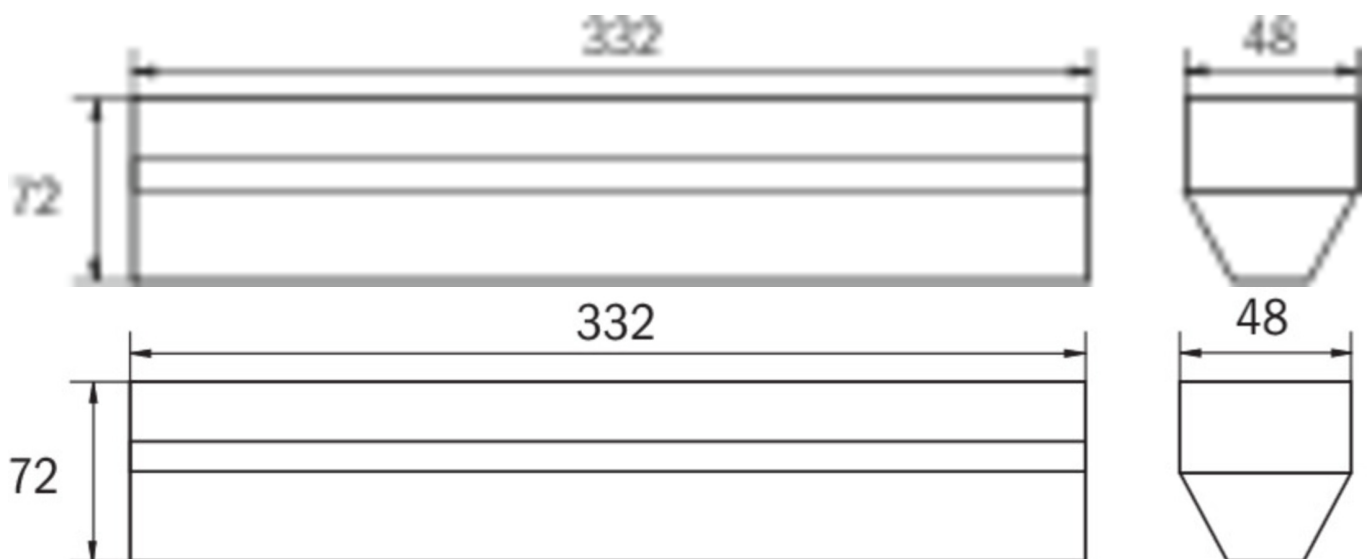



## ACCESSORY LIST

DSA -

KEE-EB -

2PW-EB -

2DW-EB -

KXBE -

As of: 09.07.2024 - Subject to technical changes and errors.