



**Art.-Nr: KEU413SC**

**Safety luminaire**

**Universal, SelfControl, , , IP40, Plastic, white**

Compact polycarbonate luminaire with ERT-LED for universal mounting and for the lighting of escape and rescue routes according to DIN EN 605981, DIN EN 60598-2-22 and EN 1838. Available for central power systems or as a self-contained luminaire. Also available as ERT luminaire with improved illumination. Plastic, white, IP40 Universal mounting (incl.: wall (W), ceiling (D), wall bracket)



More information




## TECHNICAL DATA

Luminaire type	Safety luminaire
Mounting	Universal
Pictograph	No
Housing material	Plastic
Housing color	white
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	2
Monitoring	SelfControl
Ambient temperature DS	-5 °C - 40 °C
Ambient temperature BS	-5 °C - 40 °C
Depth	332 mm
Width	48 mm
Height	72 mm
Weight	0.29
Weight incl. packaging	0.33
Customs tariff number	94056120
EAN	4260766557460



## TECHNICAL DRAWING

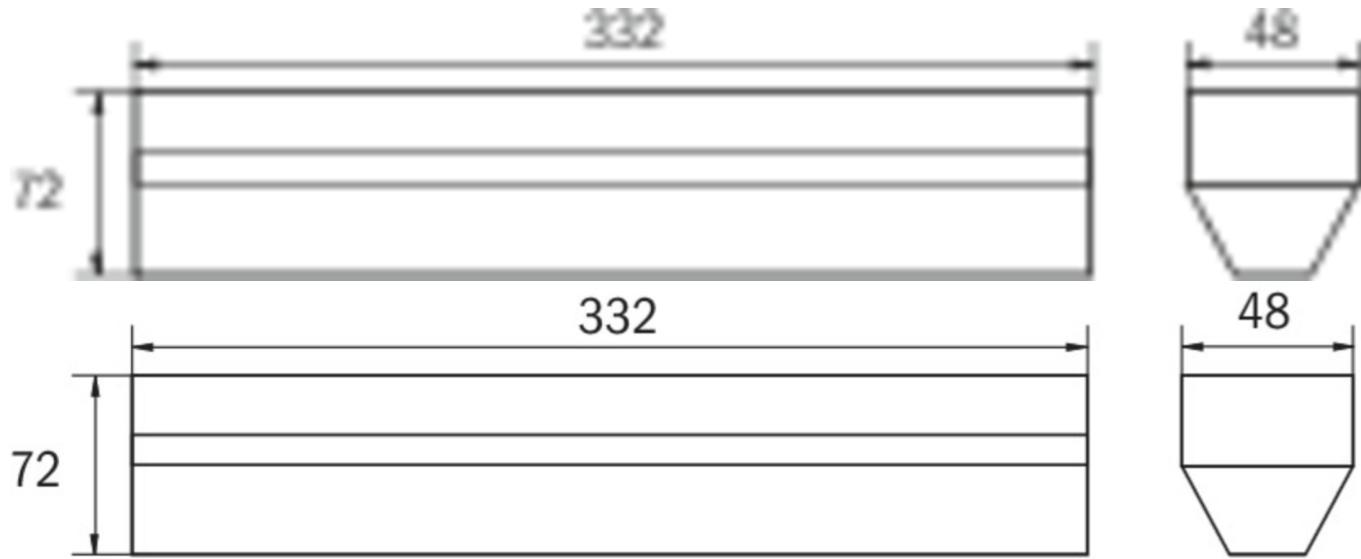

## ACCESSORY LIST

DSA -  
KEE-EB -  
2PW-EB -  
2DW-EB -  
KXBE -

As of: 10.07.2024 - Subject to technical changes and errors.