



**Art.-Nr: KEU421SC**  
**Safety luminaire Supply**  
**Universal, SelfControl, 1 h, , IP40, Plastic, white**

Compact polycarbonate luminaire with ERT-LED for universal mounting and for the lighting of escape and rescue routes according to DIN EN 605981, DIN EN 60598-2-22 and EN 1838. Available for central power systems or as a self-contained luminaire. Also available as ERT luminaire with improved illumination. Plastic, white, IP40 Universal mounting (incl.: wall (W), ceiling (D), wall bracket)



[More information](#)




## TECHNICAL DATA

| Luminaire type         | Safety luminaire |
|------------------------|------------------|
| Mounting               | Universal        |
| Pictograph             | No               |
| Illuminant             | LED              |
| Housing material       | Plastic          |
| Housing color          | white            |
| Protection type (IP)   | IP40             |
| Impact resistance (IK) | ≥ 3              |
| Certification          | WEEE, CE         |
| Insulation class       | 2                |
| Monitoring             | SelfControl      |
| Bridging time          | 1 h              |
| Power max.             | 6,4 W            |
| Power DS               | 5,6 W            |
| Power BS               | 0,9 W            |
| Ambient temperature DS | -5 °C - 40 °C    |
| Ambient temperature BS | -5 °C - 40 °C    |
| Depth                  | 332 mm           |
| Width                  | 48 mm            |
| Height                 | 72 mm            |
| Weight                 | 0.49             |
| Weight incl. packaging | 0.53             |



|                         |               |
|-------------------------|---------------|
| Luminous flux mains     | 520 lm        |
| Luminous flux emergency | 520 lm        |
| Customs tariff number   | 94056120      |
| EAN                     | 4260766557477 |

## TECHNICAL DRAWING

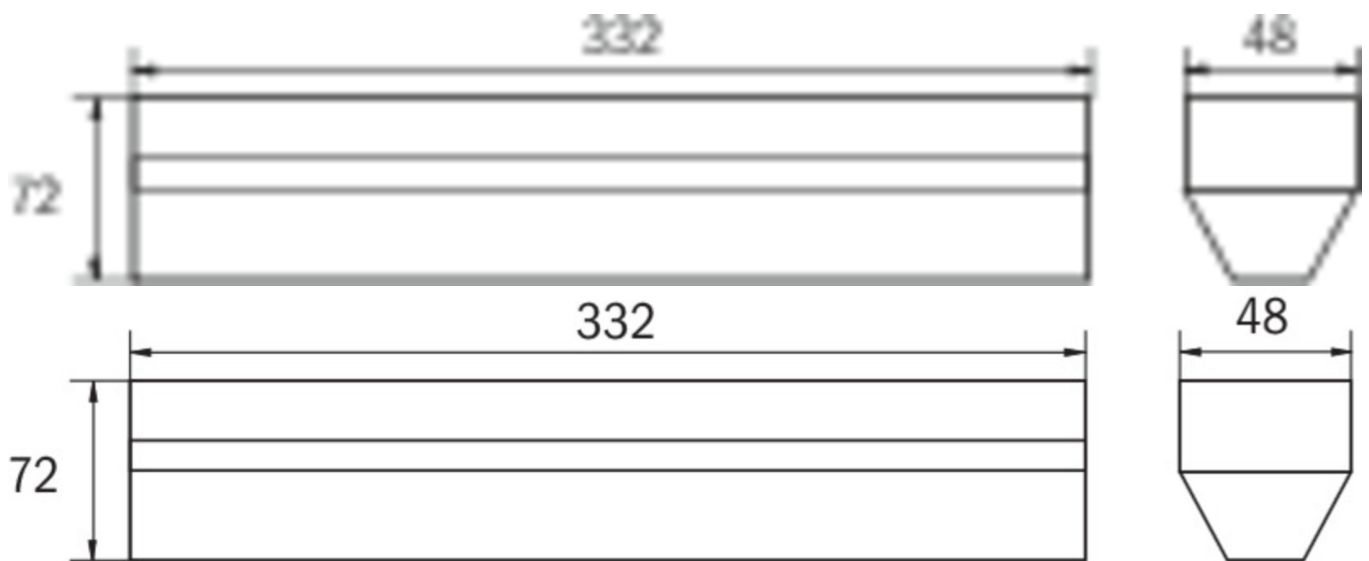

## ACCESSORY LIST

DSA -  
KEE-EB -  
2PW-EB -  
2DW-EB -  
KXBE -

As of: 10.07.2024 - Subject to technical changes and errors.