



**Art.-Nr: KLU019**

**Exit sign Centralised power supply systems  
Universal, CPS, CPS, 34 m, IP43, Plastic, white**

Slim design high-grade plastic luminaire for universal mounting (wall/ ceiling or as wall bracket with the included adapter). This luminaire provides additional downwards lighting to enhance safety at the egress route. Applicable for maintained or non-maintained operation mode. The easy to install and universally useable pictograms provide planning security. Signs according EN 60598-1, EN 60598-2-22 and EN 1838 norms.



More information




**TECHNICAL DATA**

Luminaire type	Exit sign
Mounting	Universal
Recognition distance	34 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP43
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	2
Supply	Centralised power supply systems
Monitoring	CPS
Bridging time	CPS
Operating mode	Permanent circuit
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	100-254 V
Power max.	4,5 W
Power DS	4,5 W
Power BS	0 W



Depth	78 mm
Width	390 mm
Height	220 mm
Weight	1.24
Weight incl. packaging	1.4
Connection cross-section	1.5 mm <sup>2</sup>
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	No
Luminous flux mains	300 lm
Luminous flux emergency	300 lm
Customs tariff number	94056120
Country of origin	DEUTSCHLAND
EAN	4260123686055

## TECHNICAL DRAWING

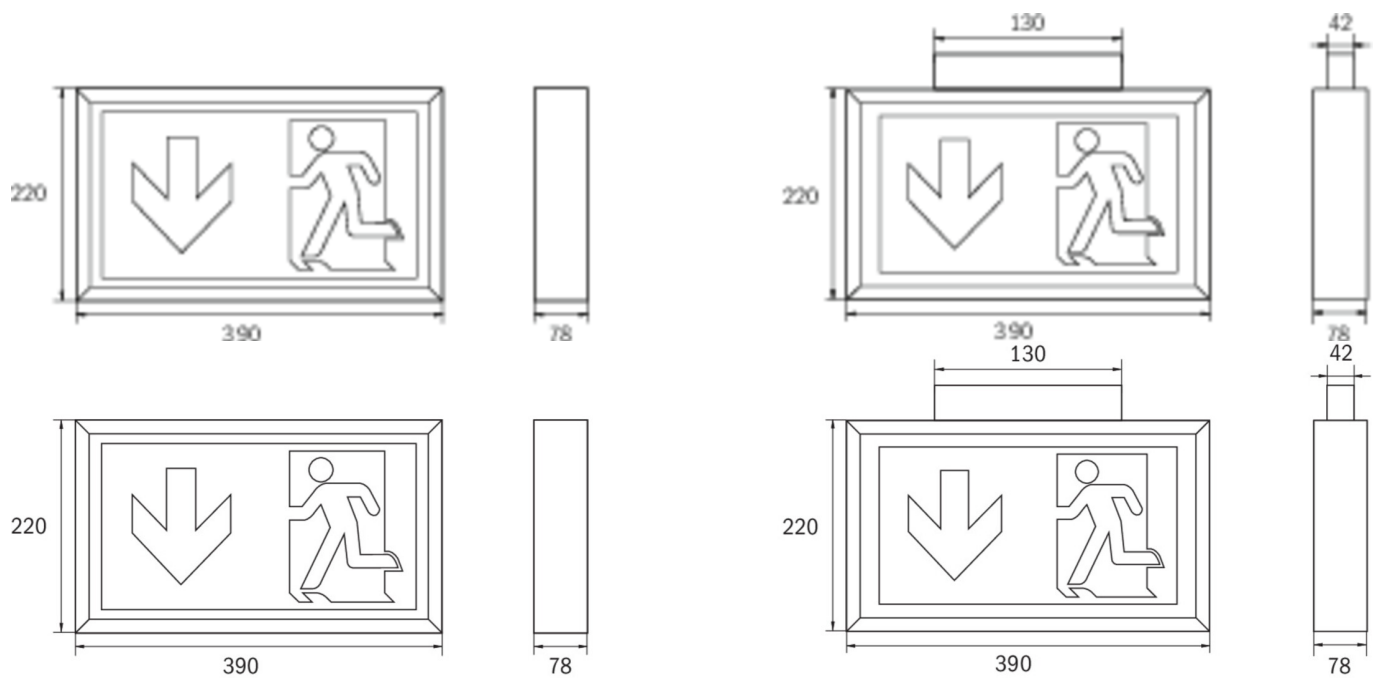



## ACCESSORY LIST

DSA -

BALL2 -

2PW-EB -

2DW-EB -

As of: 09.07.2024 - Subject to technical changes and errors.