



Art.-Nr: KLU411SC

Exit sign

Universal, SelfControl, , 34 m, IP43, Plastic, white

Slim design high-grade plastic luminaire for universal mounting (wall/ ceiling or as wall bracket with the included adapter). This luminaire provides additional downwards lighting to enhance safety at the egress route. Applicable for maintained or non-maintained operation mode. The easy to install and universally useable pictograms provide planning security. Signs according EN 60598-1, EN 60598-2-22 and EN 1838 norms.

Automatic monitoring of the emergency light with SelfControl.



More information

www.rp-group.com/en/item/KLU411SC



TECHNICAL DATA


| | |
|------------------------|---------------|
| Luminaire type | Exit sign |
| Mounting | Universal |
| Recognition distance | 34 m |
| Pictograph | Set |
| Housing material | Plastic |
| Housing color | white |
| Protection type (IP) | IP43 |
| Impact resistance (IK) | ≥ 3 |
| Certification | WEEE, CE |
| Insulation class | 2 |
| Monitoring | SelfControl |
| Battery | / |
| Ambient temperature DS | -5 °C - 40 °C |
| Ambient temperature BS | -5 °C - 40 °C |
| Depth | 78 mm |
| Width | 390 mm |
| Height | 220 mm |
| Weight | 1.19 |
| Weight incl. packaging | 1.35 |
| Customs tariff number | 94056120 |



EAN

4260766559495

TECHNICAL DRAWING

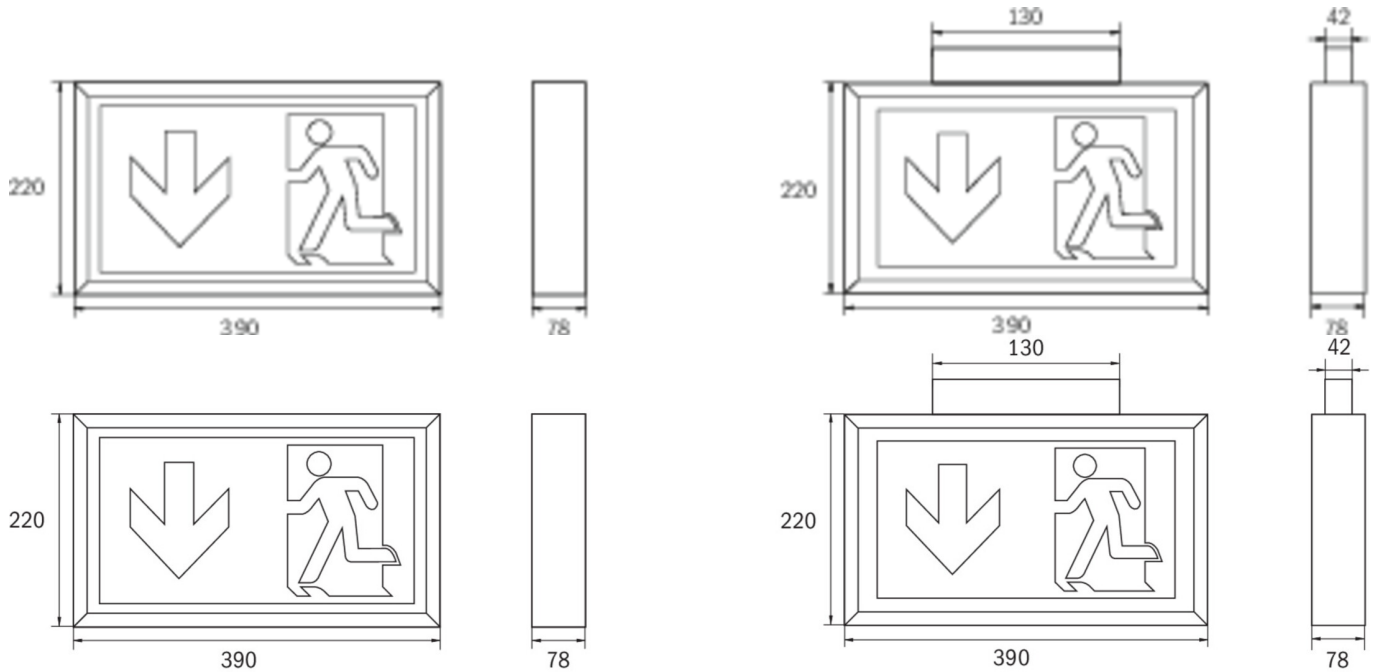

ACCESSORY LIST

DSA -
BALL2 -
2PW-EB -
2DW-EB -

As of: 04.09.2024 - Subject to technical changes and errors.