



**Art.-Nr: KLU413SC**

**Exit sign**

**Universal, SelfControl, 3 h, 34 m, IP43, Plastic, white**

Slim design high-grade plastic luminaire for universal mounting (wall/ ceiling or as wall bracket with the included adapter). This luminaire provides additional downwards lighting to enhance safety at the egress route. Applicable for maintained or non-maintained operation mode. The easy to install and universally useable pictograms provide planning security. Signs according EN 60598-1, EN 60598-2-22 and EN 1838 norms.



More information




## TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Universal
Recognition distance	34 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP43
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	2
Monitoring	SelfControl
Bridging time	3 h
Power max.	4,1 W
Power DS	3,3 W
Power BS	0,4 W
Ambient temperature DS	-5 °C - 40 °C
Ambient temperature BS	-5 °C - 40 °C
Depth	78 mm
Width	390 mm
Height	220 mm



Weight	1.29
Weight incl. packaging	1.45
Luminous flux mains	225 lm
Luminous flux emergency	225 lm
Customs tariff number	94056120
EAN	4260766553585

## TECHNICAL DRAWING

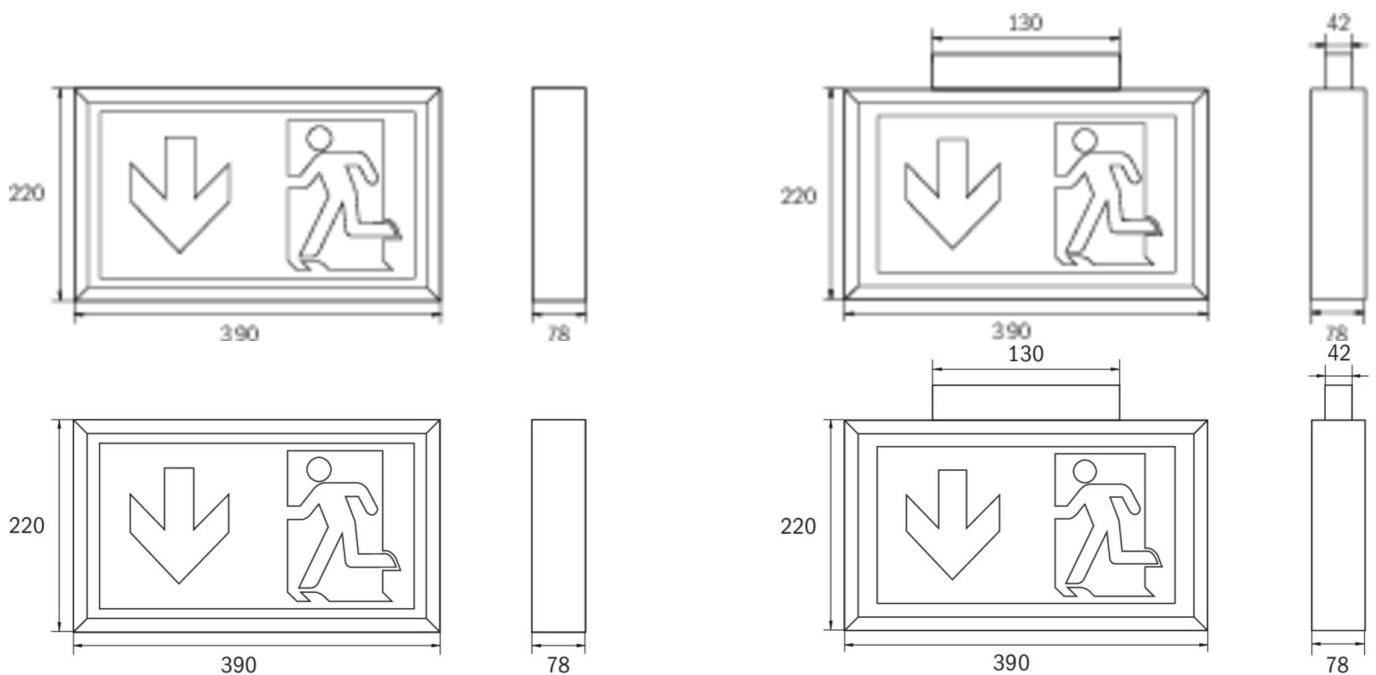

## ACCESSORY LIST

DSA -  
BALL2 -  
2PW-EB -  
2DW-EB -

As of: 10.07.2024 - Subject to technical changes and errors.