



**Art.-Nr: KMB019ML-SW**  
**Safety luminaire Central power supply**  
**Universal, ML, Central power supply, , IP54, Plastic, Black**

Compact emergency luminaire for the illumination of escape and rescue routes with prismatic cover for optimized light distribution. This is made possible by the High-Power SMD LEDs which also have a really long life span of around 50000 h. These luminaires are available for central battery systems or as a self-contained luminaire. The optional recessed mounting frame hides the luminaire elegantly within the ceiling.

Housing color in black RAL 9005



[More information](#)




## TECHNICAL DATA

Luminaire type	Safety luminaire
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Plastic
Housing color	Black
Protection type (IP)	IP54
Impact resistance (IK)	≥ 3
Certification	Waste disposal, CE
Insulation class	2
Supply	Central power supply
Monitoring	ML
Bridging time	Central power supply
Operating mode	single luminaire switching
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	216 V
Power max.	3,2 W
Power DS	3,2 W
Power BS	1 W



Depth	250 mm
Width	34 mm
Height	50 mm
Weight	0.5
Weight incl. packaging	0.57
Connection cross-section	2.5 mm <sup>2</sup>
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Luminous flux mains	220 lm
Luminous flux emergency	220 lm
Customs tariff number	94056120
Country of origin	DEUTSCHLAND
EAN	4260682159427

## TECHNICAL DRAWING

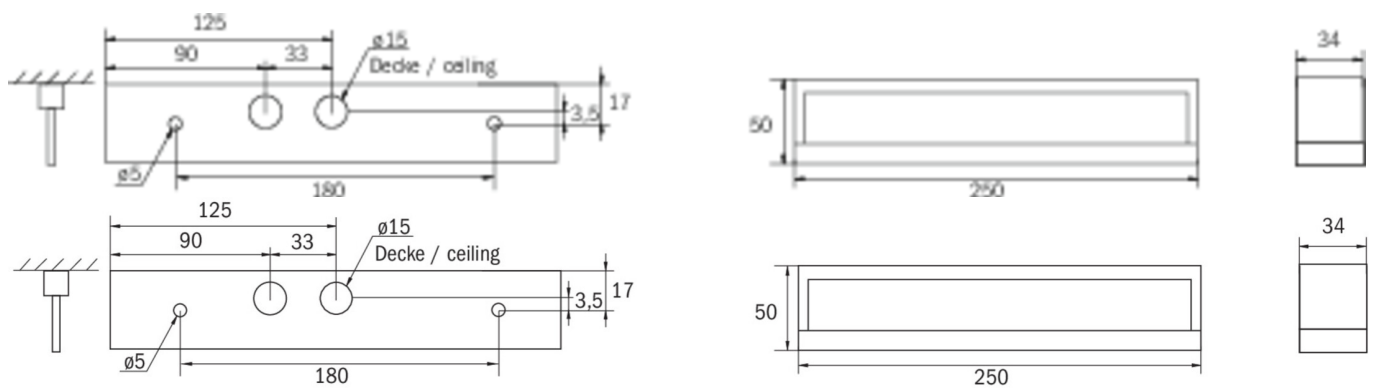

## ACCESSORY LIST

KME-EB -  
BALL1 -  
KMBE -  
BALLPLX-KMB -  
KMBFH -



## RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
KMB019ML		ML	Central power supply		€€€	Yes	low	Yes	1,920 per system	central
KMB519CC		CoreCompact 24	Central power supply		€€	Yes	low	Yes		central

As of: 29.06.2024 - Subject to technical changes and errors.