



Art.-Nr: KMB019ML-SW
Sikkerhetslys sentral strømforsyning
Universell, ML, sentral strømforsyning, , IP54, plast, Svart

Compact emergency luminaire for the illumination of escape and rescue routes with prismatic cover for optimized light distribution. This is made possible by the with the High-Power SMD LEDs wich also have an really long live spand of around 50000 h. These luminaires are available for central battery systems or as a selfcontained luminaire. The optional recessed mounting frame hides the luminaire elegantly within the ceiling.

Housing color in black RAL 9005



Mer informasjon




TEKNISKE DATA

Type armatur	Sikkerhetslys
Monteringstype	Universell
piktogram	Nei
Lyspærer	LED
Koffertmateriale	plast
Farge på huset	Svart
IP-beskyttelse)	IP54
Slagstyrke (IK)	≥ 3
Sertifisering	Søppeltømming, CE
beskyttelses klasse	2
omsorg	sentral strømforsyning
overvåkning	ML
Brotid	sentral strømforsyning
Driftsmodus	Individuell lysveksling
Inngangsspenning AC	230 V
Inngangsfrekvens	50/60 Hz
Inngangsspenning DC	216 V
Maks effekt.	3,2 W
Ytelse DS	3,2 W
Ytelse BS	1 W



dybde	250 mm
Bredde	34 mm
Høyde	50 mm
Vekt	0.5
Vekt inkludert emballasje	0.57
Tverrsnitt for tilkobling	2.5 mm ²
Koblingsinngang	Nei
Blokkering av nødlys	Nei
Batteritilkobling	Nei
Dimmefunksjon	Ja
Lysstrømnettverk	220 lm
Lysstrøm nødsituasjon	220 lm
Tolltariffnummer	94056120
Opprinnelsesland	DEUTSCHLAND
EAN	4260682159427

TEKNISK TEGNING

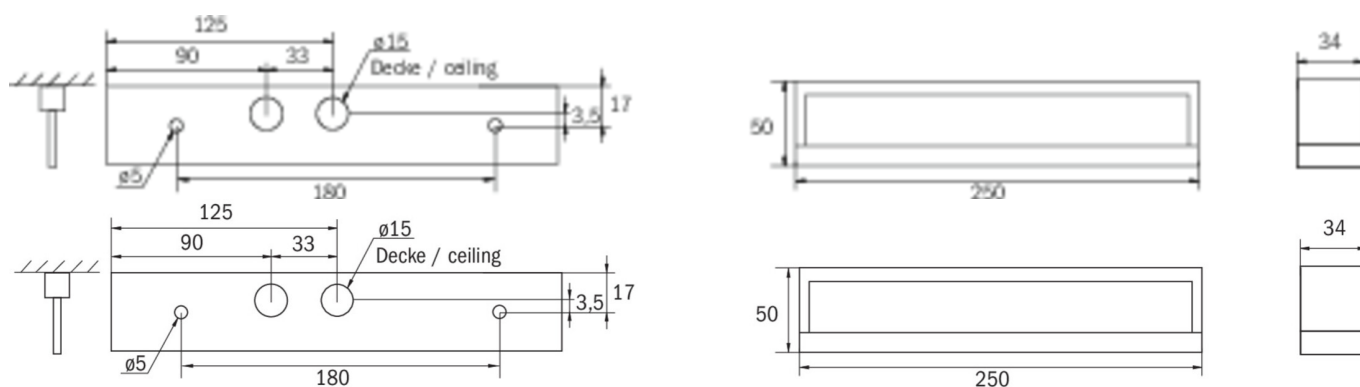

TILBEHØRSLISTE

KME-EB -
BALL1 -
KMBE -
BALLPLX-KMB -
KMBFH -



LIGNENDE PRODUKTER

Varenr.	Bilde	overvåkning	omsorg	Farge	investering	Automatisk inspeksjonsbok	Vedlikeholdsinnsett	fjernvedlikehold	maks. lys	Individuell lysovervåking
KMB019ML		ML	Sentral strømforsyning		€€€	Ja	lav	Ja	1920 kroner per system	sentralt
KMB519CC		CoreCompact 24	Sentral strømforsyning		€€	Ja	lav	Ja		sentralt

Fra: 29.06.2024 - Det tas forbehold om tekniske endringer og feil.