



Art.-Nr: KMU011WL
Exit sign Single Battery
Universal, Wireless Professional, 1 h, 24 m, IP43, Plastic,
white

Slim convex exit sign. The universal mounting includes wall and ceiling surface mounting, as well as the possibility of recessed ceiling installation in conjunction with the mounting frame. Planning safety for marking the escape and rescue routes for one- or two-sided lettering is ensured by the tool-free, variable use of the pictograms on site. The pictograms are inserted solvent-free. The pictogram set (right, left, top and bottom arrow) is included as standard.

Exit sign according to EN 60598-1, EN 605982-22 and EN 1838.

Wireless centralised control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional.



More information

www.rp-group.com/en/item/KMU011WL



TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Universal
Recognition distance	24 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP43
Impact resistance (IK)	3
Certification	WEEE, CE, CNBOP, ENEC
Insulation class	2
Supply	Single Battery
Monitoring	Wireless Professional
Bridging time	1 h
Battery	3,2V V 3,3Ah Ah/
Operating mode	Standby circuit / permanent circuit
Input voltageAC	230 V



Input frequency	50 / 60 Hz
Input voltage DC	- V
Power max.	5,3 W
Power DS	3,9 W
Power BS	1,5 W
Ambient temperature DS	-5 °C - 40 °C
Ambient temperature BS	-5 °C - 40 °C
Depth	34 mm
Width	250 mm
Height	174 mm
Weight	0.45
Weight incl. packaging	0.55
Connection cross-section	2.5 mm ²
Switching input	Yes
Emergency light blocking	No
Battery connection	Connector
Dimming function	No
Luminous flux mains	190 lm
Luminous flux emergency	190 lm
Customs tariff number	94056120
EAN	4260659567279



TECHNICAL DRAWING

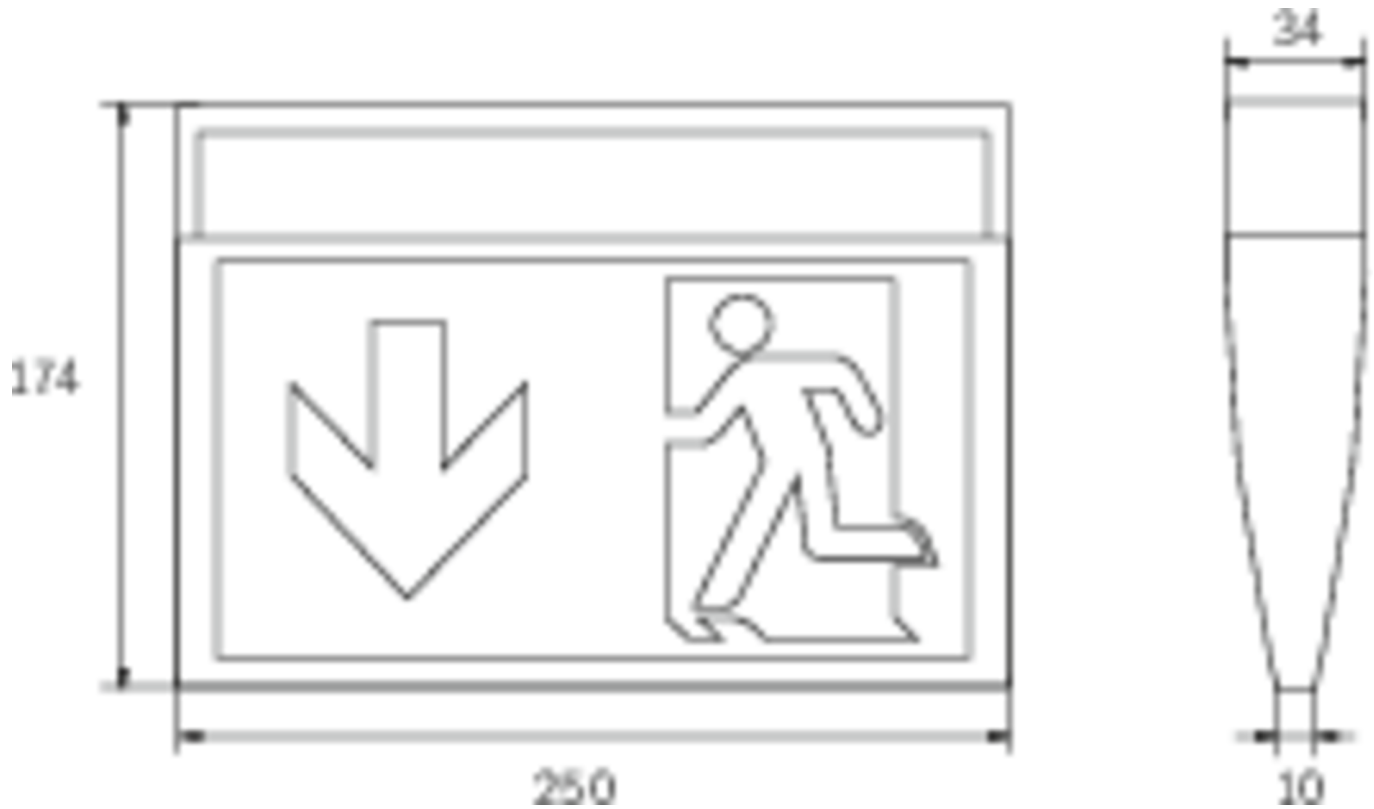

ACCESSORY LIST

DSA -
KME -
AWKSU -
2PW-EB.1.5M -
2PW-EB.2M -
2PW-EB.1M -
2PW-EB -



RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
KMU011SC		SelfControl	Single battery	RAL 9003	€	no	high	no	unlimited	itself
KMU011SC-G10		SelfControl	Single battery	RAL 9003	€	no	high	no	unlimited	itself
KMU011WB		Wireless Basic	Single battery	RAL 9003	€€	yes	low	yes	50	central
KMU011WL-G10		Wireless Professional	Single battery	RAL 9003	€€	yes	low	yes	1,000 per system	central

As of: 20.08.2024 - Subject to technical changes and errors.