



Art.-Nr: KMU013WL-SW
Exit sign Single Battery
Universal, Wireless Professional, 3 h, 24 m, IP43, Plastic,
Black

Slim convex polycarbonate luminaire for universal mounting and for the marking of escape and rescue routes acc. to DIN EN 60598-1, DIN EN 605982-22 and DIN EN 1838 for single or double sided labeling. LED technology white High-Power SMD LED.

Housing color in black RAL 9005

Wireless centralised control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional.



More information

www.rp-group.com/en/item/KMU013WL-SW



TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Universal
Recognition distance	24 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	Black
Protection type (IP)	IP43
Impact resistance (IK)	3
Certification	WEEE, CE
Insulation class	2
Supply	Single Battery
Monitoring	Wireless Professional
Bridging time	3 h
Battery	3,2V V 3,3Ah Ah/
Operating mode	Standby circuit / permanent circuit
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	- V



Power max.	5,3 W
Power DS	3,9 W
Power BS	1,5 W
Ambient temperature DS	-5 °C - 50 °C
Ambient temperature BS	-5 °C - 35 °C
Depth	34 mm
Width	250 mm
Height	174 mm
Weight	0.45
Weight incl. packaging	0.55
Connection cross-section	2.5 mm ²
Switching input	Yes
Emergency light blocking	No
Battery connection	Connector
Dimming function	No
Luminous flux mains	190 lm
Luminous flux emergency	190 lm
Customs tariff number	94056120
EAN	4260682151650



TECHNICAL DRAWING

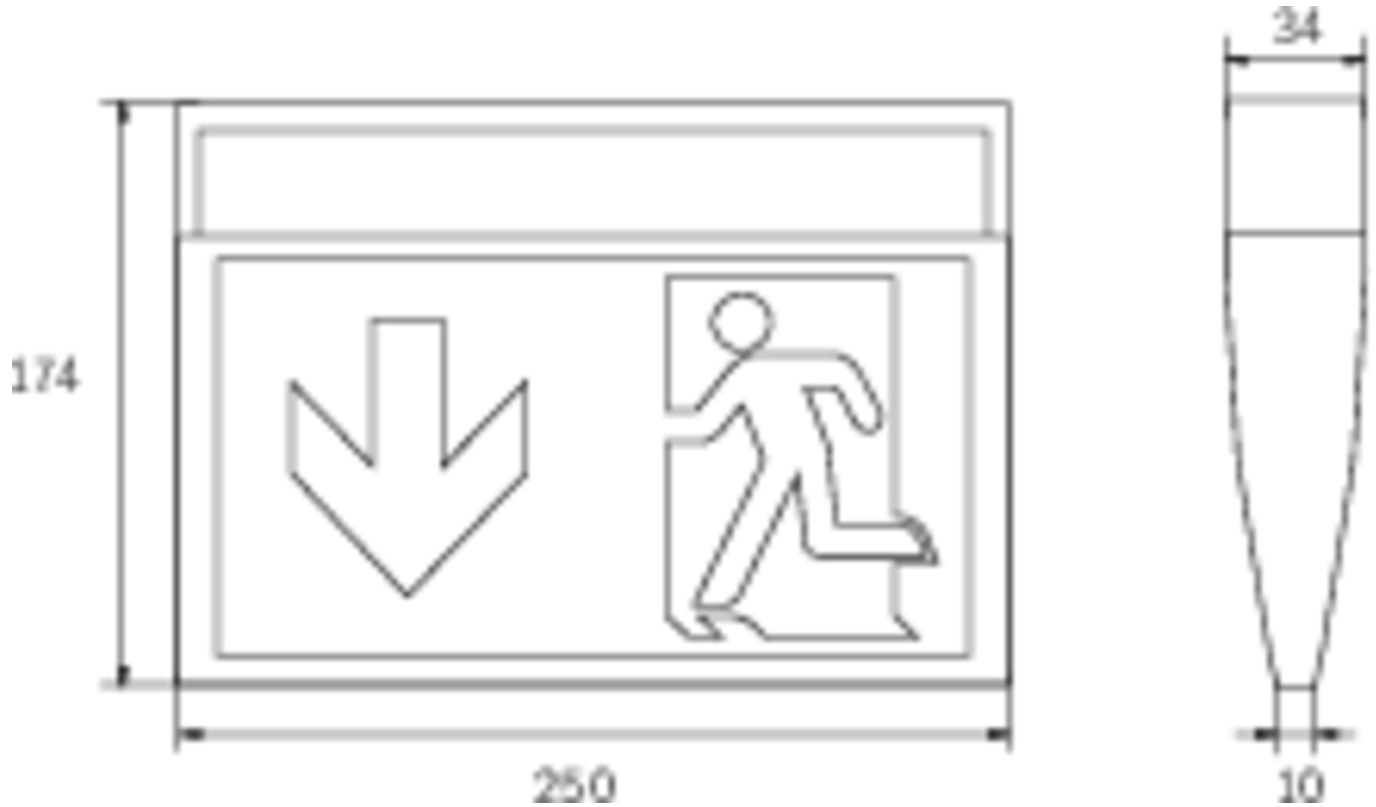

ACCESSORY LIST

DSA -
KME-EB -
AWKSU -
2PW-EB -
KMBE -
BALLPLX-KMU -

As of: 20.08.2024 - Subject to technical changes and errors.