



#### Art.-Nr: KMU013WL **Exit sign Single Battery** Universal, Wireless Professional, 3 h, 24 m, IP43, Plastic, white

Slim convex exit sign. The universal mounting includes wall and ceiling surface mounting, as well as the possibility of recessed ceiling installation in conjunction with the mounting frame. Planning safety for marking the escape and rescue routes for one- or two-sided lettering is ensured by the tool-free, variable use of the pictograms on site. The pictograms are inserted solvent-free. The pictogram set (right, left, top and bottom arrow) is included as standard.

Exit sign according to EN 60598-1, EN 605982-22 and EN 1838.

Wireless centralised control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional.









More information

www.rp-group.com/en/item/KMU013WL



#### **TECHNICAL DATA**

Luminaire type	Exit sign				
Mounting	Universal				
Recognition distance	24 m				
Pictograph	Set				
Illuminant	LED				
Housing material	Plastic				
Housing color	white				
Protection type (IP)	IP43				
Impact resistance (IK)	3				
Certification	WEEE, CE, CNBOP, ENEC				
Insulation class	2				
Supply	Single Battery				
Monitoring	Wireless Professional				
Bridging time	3 h				
Battery	3,2V V 3,3Ah Ah/				
Operating mode	Standby circuit / permanent circuit				
Input voltageAC	230 V				






Input frequency	50 / 60 Hz
Input voltage DC	- V
Power max.	5,3 W
Power DS	3,9 W
Power BS	1,5 W
Ambient temperature DS	-5 °C - 40 °C
Ambient temperature BS	-5 °C - 40 °C
Depth	34 mm
Width	250 mm
Height	174 mm
Weight	0.45
Weight incl. packaging	0.55
Connection cross-section	2.5 mm²
Switching input	Yes
Emergency light blocking	No
Battery connection	Connector
Dimming function	No
Luminous flux mains	190 lm
Luminous flux emergency	190 lm
Customs tariff number	94056120
EAN	4260123690274





# TECHNICAL DRAWING

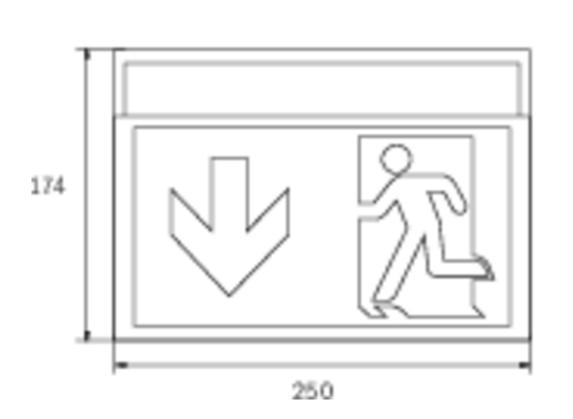



# ACCESSORY LIST

DSA -

KME -

AWKSU -

2PW-EB.1.5M -

2PW-EB.2M -

2PW-EB.1M -

2PW-EB -





### RELATED PRODUCTS

ArtNo.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
KMU003SC	<b>₹</b> →	SelfControl	Single battery	RAL 9003	€	no	high	no	unlimited	itself
KMU013SC	<b>F</b> +	SelfControl	Single battery	RAL 9003	€	no	high	no	unlimited	itself
KMU013WB	<b>₹</b>	Wireless Basic	Single battery	RAL 9003	€€	yes	low	yes	50	central

As of: 20.08.2024 - Subject to technical changes and errors.