



**Art.-Nr: KMU018WL-SW**  
**Exit sign Single Battery**  
**Universal, Wireless Professional, 8 h, 24 m, IP43, Plastic,**  
**Black**

Slim convex polycarbonate luminaire for universal mounting and for the marking of escape and rescue routes acc. to DIN EN 60598-1, DIN EN 605982-22 and DIN EN 1838 for single or double sided labeling. LED technology white High-Power SMD LED.

Housing color in black RAL 9005

Wireless centralised control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional.



More information

[www.rp-group.com/en/item/KMU018WL-SW](http://www.rp-group.com/en/item/KMU018WL-SW)



## TECHNICAL DATA


|                        |                                     |
|------------------------|-------------------------------------|
| Luminaire type         | Exit sign                           |
| Mounting               | Universal                           |
| Recognition distance   | 24 m                                |
| Pictograph             | Set                                 |
| Illuminant             | LED                                 |
| Housing material       | Plastic                             |
| Housing color          | Black                               |
| Protection type (IP)   | IP43                                |
| Impact resistance (IK) | 3                                   |
| Certification          | WEEE, CE                            |
| Insulation class       | 2                                   |
| Supply                 | Single Battery                      |
| Monitoring             | Wireless Professional               |
| Bridging time          | 8 h                                 |
| Battery                | 3,2V V 3,3Ah Ah/                    |
| Operating mode         | Standby circuit / permanent circuit |
| Input voltage AC       | 230 V                               |
| Input frequency        | 50 / 60 Hz                          |
| Input voltage DC       | - V                                 |



|                          |                     |
|--------------------------|---------------------|
| Power max.               | 5,3 W               |
| Power DS                 | 3,9 W               |
| Power BS                 | 1,5 W               |
| Ambient temperature DS   | -5 °C - 50 °C       |
| Ambient temperature BS   | -5 °C - 35 °C       |
| Depth                    | 34 mm               |
| Width                    | 250 mm              |
| Height                   | 174 mm              |
| Weight                   | 0.45                |
| Weight incl. packaging   | 0.55                |
| Connection cross-section | 2.5 mm <sup>2</sup> |
| Switching input          | Yes                 |
| Emergency light blocking | No                  |
| Battery connection       | Connector           |
| Dimming function         | No                  |
| Luminous flux mains      | 190 lm              |
| Luminous flux emergency  | 85 lm               |
| Customs tariff number    | 94056120            |
| EAN                      | 4260682151667       |



## TECHNICAL DRAWING

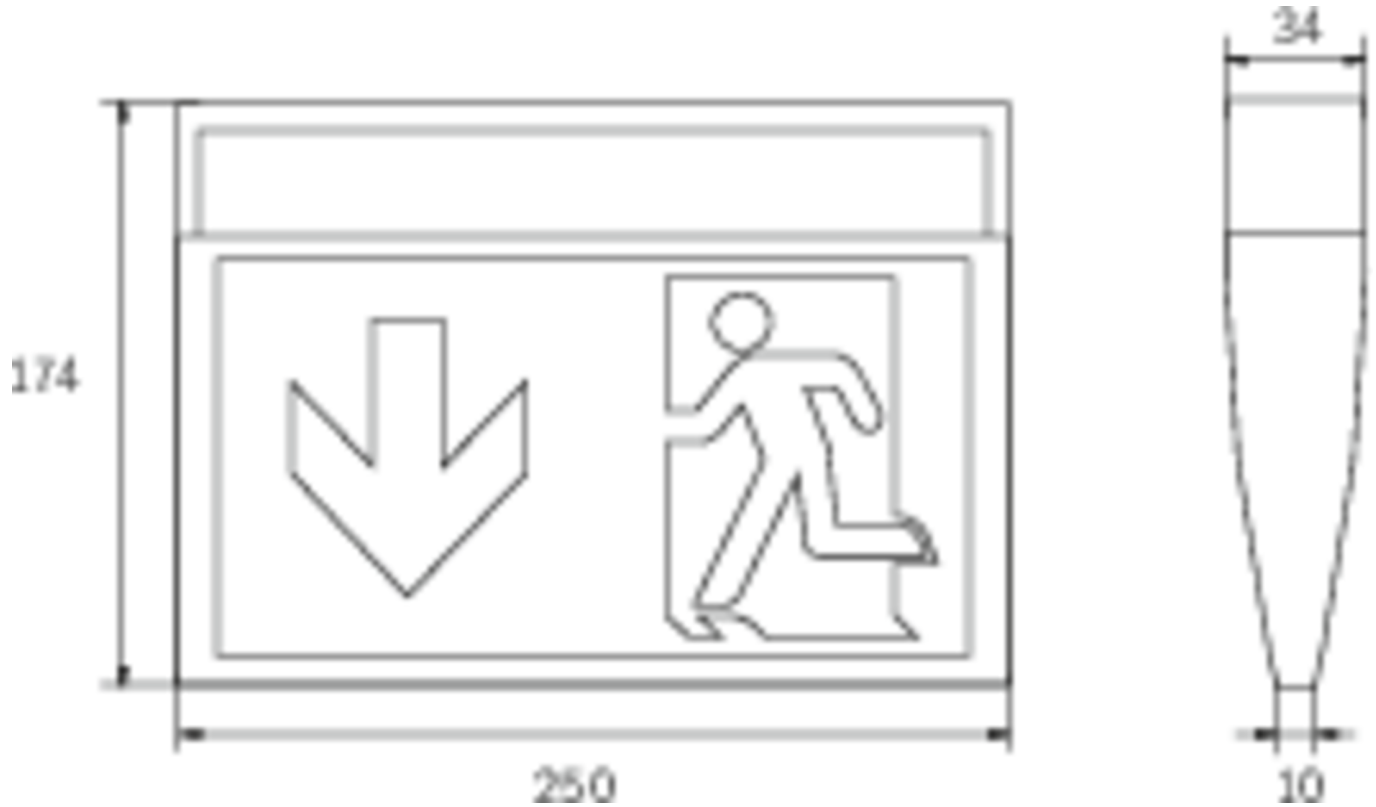

## ACCESSORY LIST

DSA -  
KME-EB -  
AWKSU -  
2PW-EB -  
KMBE -  
BALLPLX-KMU -

As of: 20.08.2024 - Subject to technical changes and errors.