



Art.-Nr: KMU019

**Exit sign Centralised power supply systems
Universal, CPS, CPS, 24 m, IP43, Plastic, white**

Slim convex exit sign. The universal mounting includes wall and ceiling surface mounting, as well as the possibility of recessed ceiling installation in conjunction with the mounting frame. Planning safety for marking the escape and rescue routes for one- or two-sided lettering is ensured by the tool-free, variable use of the pictograms on site. The pictograms are inserted solvent-free. The pictogram set (right, left, top and bottom arrow) is included as standard.

Exit sign according to EN 60598-1, EN 605982-22 and EN 1838.



[More information](#)



TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Universal
Recognition distance	24 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP43
Impact resistance (IK)	3
Certification	CNBOP, WEEE, CE, ENEC
Insulation class	2
Supply	Centralised power supply systems
Monitoring	CPS
Bridging time	CPS
Operating mode	single luminaire switching
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	216 V
Power max.	3,2 W
Power DS	3,2 W



Power BS	1 W
Depth	34 mm
Width	250 mm
Height	174 mm
Weight	0.37
Weight incl. packaging	0.47
Connection cross-section	2.5 mm ²
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Luminous flux mains	220 lm
Luminous flux emergency	220 lm
Customs tariff number	94056120
Country of origin	DEUTSCHLAND
EAN	4260659562007



TECHNICAL DRAWING

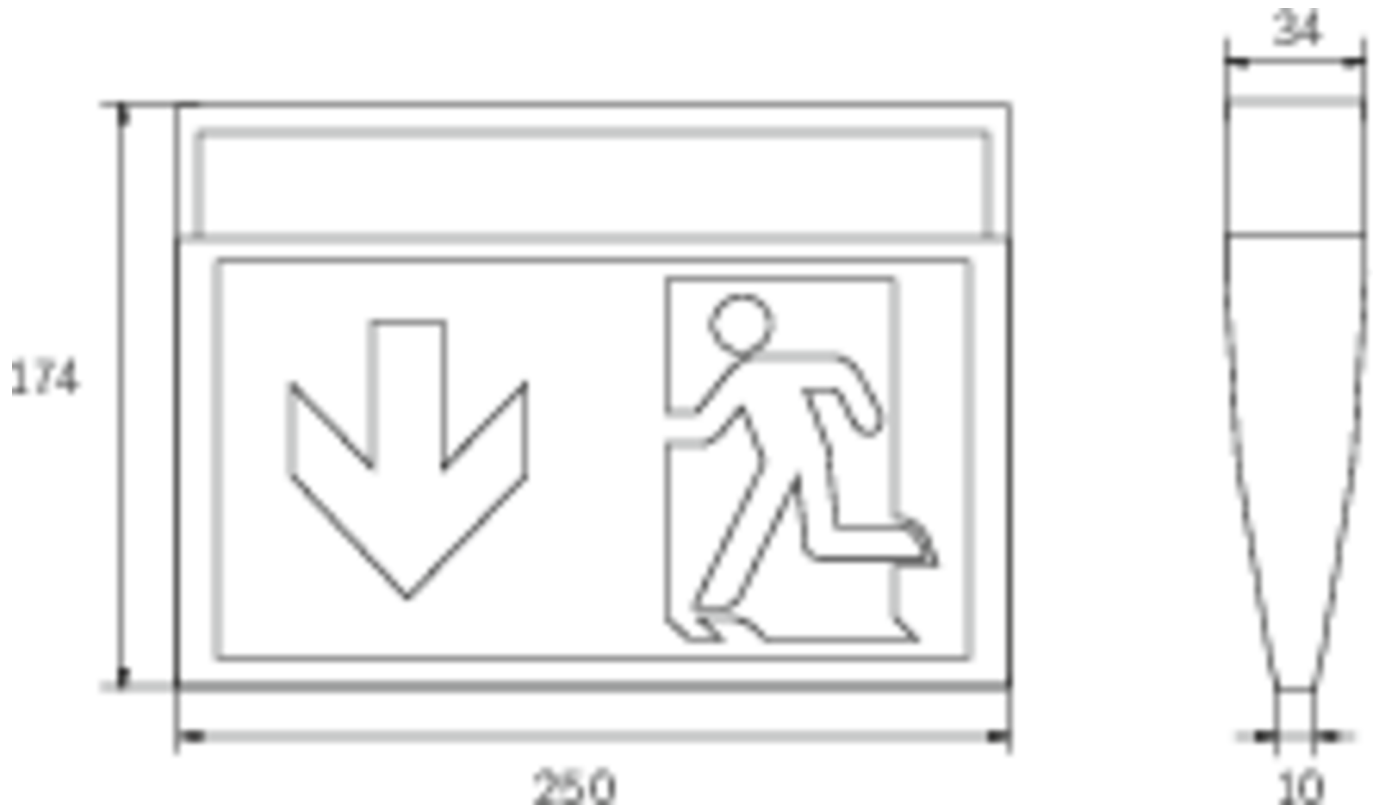

ACCESSORY LIST

DSA -
KME-EB -
AWKSU -
2PW-EB -
KMBE -
BALLPLX-KMU -

As of: 09.07.2024 - Subject to technical changes and errors.