



Art.-Nr: KMU019ML-SW
Exit sign Central power supply
Universal, ML, Central power supply, 24 m, IP43, Plastic, Black

Slim convex polycarbonate luminaire for universal mounting and for the marking of escape and rescue routes acc. to DIN EN 60598-1, DIN EN 605982-22 and DIN EN 1838 for single or double sided labeling. LED technology white High-Power SMD LED.

Housing color in black RAL 9005



More information




TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Universal
Recognition distance	24 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	Black
Protection type (IP)	IP43
Impact resistance (IK)	3
Certification	Waste disposal, CE
Insulation class	2
Supply	Central power supply
Monitoring	ML
Bridging time	Central power supply
Operating mode	single luminaire switching
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	216 V
Power max.	3,2 W
Power DS	3,2 W
Power BS	1 W



Depth	34 mm
Width	250 mm
Height	174 mm
Weight	0.37
Weight incl. packaging	0.47
Connection cross-section	2.5 mm ²
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Luminous flux mains	220 lm
Luminous flux emergency	220 lm
Customs tariff number	94056120
Country of origin	DEUTSCHLAND
EAN	4260682151575

TECHNICAL DRAWING

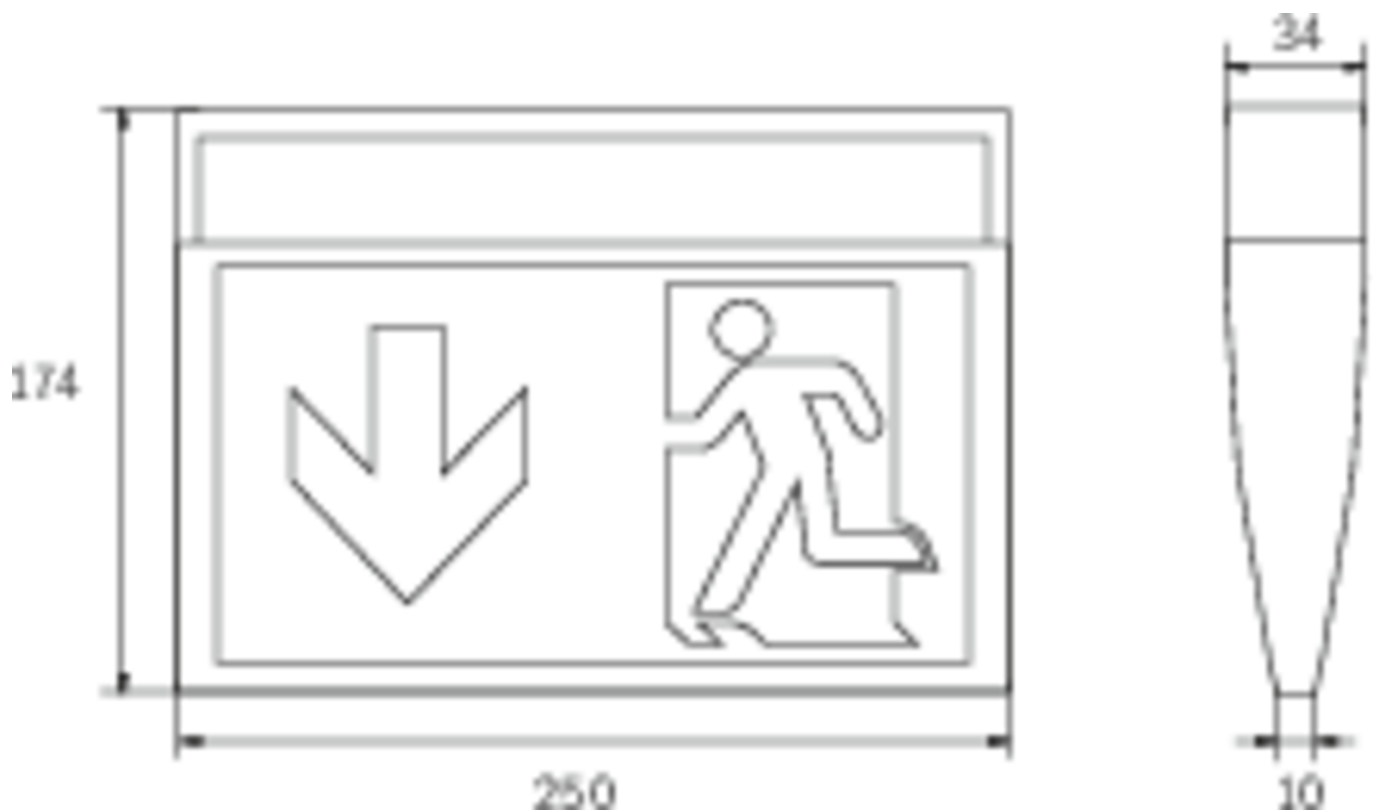



ACCESSORY LIST

DSA -
KME-EB -
AWKSU -
2PW-EB -
KMBE -
BALLPLX-KMU -

RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
KMU019ML		ML	Central power supply		€€€	Yes	low	Yes	1,920 per system	central
KMU519CC		CoreCompact 24	Central power supply		€€	Yes	low	Yes		central
KMU519CC-SW		CoreCompact 24	Central power supply		€€	Yes	low	Yes		central

As of: 28.06.2024 - Subject to technical changes and errors.