



Art.-Nr: KMU519CC-SW

Utgangsskilt lys sentral strømforsyning

Universell, CoreCompact 24, sentral strømforsyning, 24 m, IP43, plast, Svart

Slim convex exit sign. The universal mounting includes wall and ceiling surface mounting, as well as the possibility of recessed ceiling installation in conjunction with the mounting frame. Planning safety for marking the escape and rescue routes for one- or two-sided lettering is ensured by the tool-free, variable use of the pictograms on site. The pictograms are inserted solvent-free. The pictogram set (right, left, top and bottom arrow) is included as standard.

Exit sign according to EN 60598-1, EN 605982-22 and EN 1838.



Mer informasjon




TEKNISKE DATA

Type armatur	Utgangsskilt lys
Monteringstype	Universell
Deteksjonsområde	24 m
piktogram	sett
Lyspærer	LED
Koffertmateriale	plast
Farge på huset	Svart
IP-beskyttelse)	IP43
Slagstyrke (IK)	3
Sertifisering	Sjøpeltømming, CE
beskyttelses klasse	3
omsorg	sentral strømforsyning
overvåkning	CoreCompact 24
Brotid	sentral strømforsyning
Driftsmodus	Standby kobling / permanent kobling
Inngangsspenning AC	24 V
Maks effekt.	2,1 W
Ytelse DS	2,1 W
Ytelse BS	0,4 W
dybde	34 mm



Bredde	250 mm
Høyde	174 mm
Vekt	0.31
Vekt inkludert emballasje	0.41
Tverrsnitt for tilkobling	2.5 mm ²
Koblingsinngang	Nei
Blokkering av nødlys	Nei
Batteritilkobling	Nei
Dimmefunksjon	Ja
Tolltariffnummer	94056120
Opprinnelsesland	DEUTSCHLAND
EAN	4260766550164

TEKNISK TEGNING

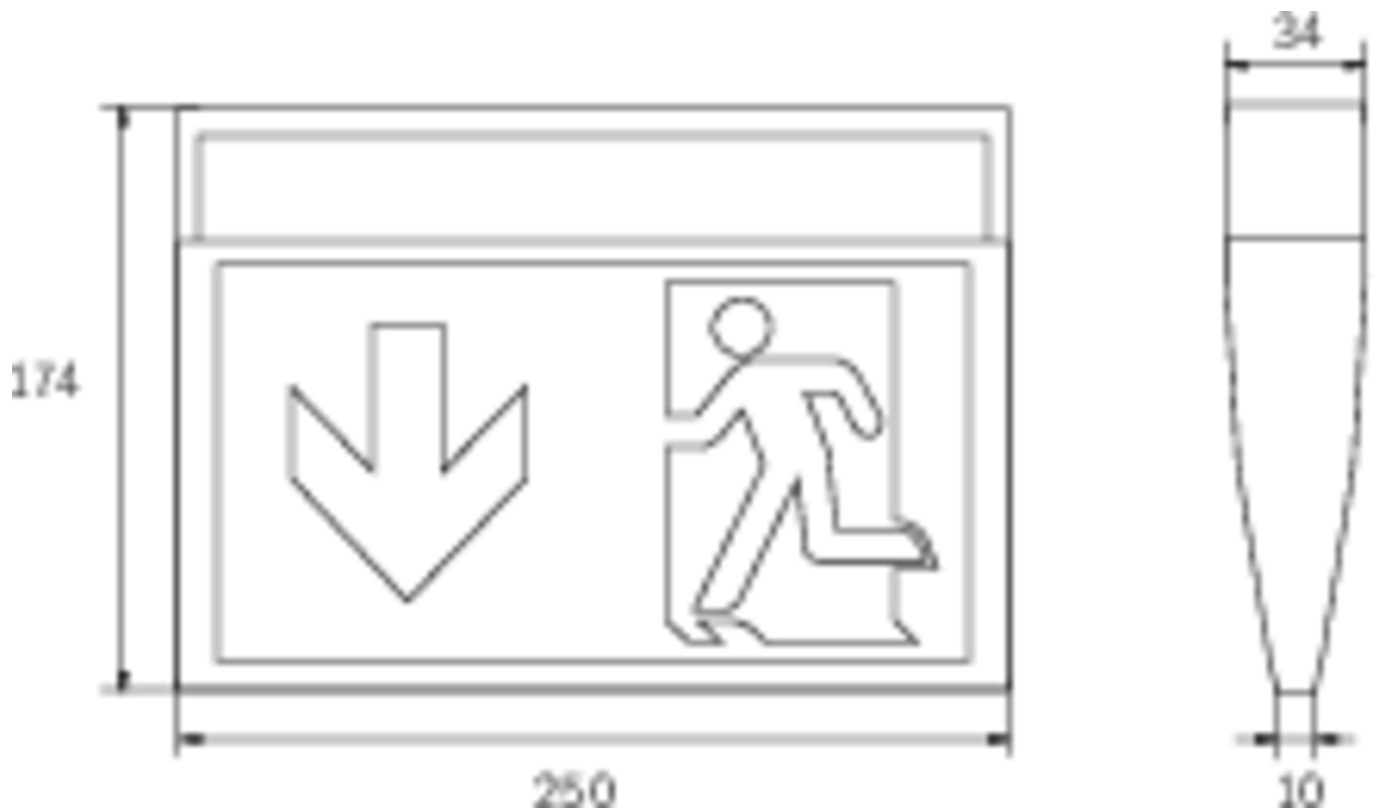



TILBEHØRSLISTE

DSA -
KME-EB -
AWKSU -
2PW-EB -
KMBE -
BALLPLX-KMU -

LIGNENDE PRODUKTER

Varenr.	Bilde	overvåkning	omsorg	Farge	investering	Automatisk inspeksjonsbok	Vedlikeholdsinnsett	fjernvedlikehold	maks. lys	Individuell lysovervåking
KMU019ML		ML	Sentral strømforsyning		€€€	Ja	lav	Ja	1920 kroner per system	sentralt
KMU019ML-SW		ML	Sentral strømforsyning		€€€	Ja	lav	Ja	1920 kroner per system	sentralt
KMU519CC		CoreCompact 24	Sentral strømforsyning		€€	Ja	lav	Ja		sentralt

Fra: 28.06.2024 - Det tas forbehold om tekniske endringer og feil.