



**Art.-Nr: KMUK403SC**  
**Exit sign Single Battery**  
**Universal, SelfControl (SC), 3 h, 24 m, IP43, Plastic, white**

Slim convex escape sign light with clear closed hood. The universal mounting includes wall and ceiling surface mounting, as well as the possibility of recessed ceiling installation in conjunction with the mounting frame. Planning safety for marking the escape and rescue routes for one- or two-sided lettering is ensured by the tool-free, variable use of the pictograms on site. The pictograms are internal and are inserted solvent-free. The pictogram set (right, left, top and bottom arrow) is included as standard.

Exit sign according to EN 60598-1, EN 605982-22 and EN 1838.

Automatic monitoring of safety luminaire with SelfControl. The innovative integrated lens holder with a rapid fitting fixture permits the flexible use of various lens types. Using the right lens allows the distribution of light to be matched perfectly to the application and simplifies illumination which satisfies all relevant standards. A round lens and hall lens are supplied with every luminaire, allowing it to be adapted perfectly to the respective mounting situation. Other lenses, such as a spotlight lens, beam lens or H lens, are available as options. Universal mounting includes fitting on the wall and ceiling as well as the option of fitting in the ceiling in conjunction with the mounting frame available.



More information  
[www.rp-group.com/en/item/KMUK403SC](http://www.rp-group.com/en/item/KMUK403SC)



## TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Universal
Recognition distance	24 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP43
Impact resistance (IK)	3
Certification	WEEE, CE, 5 years warranty
Insulation class	2
Supply	Single Battery



Monitoring	SelfControl (SC)
Bridging time	3 h
Battery	LiFePO4 3,2V V/1,5Ah Ah
Operating mode	Permanent circuit
Input voltageAC	230 V
Input frequency	50 / 60 Hz
Power max.	3,7 W
Power DS	3,2 W
Power BS	0,3 W
Ambient temperature DS	0 °C - 40 °C
Ambient temperature BS	0 °C - 40 °C
Depth	35 mm
Width	251 mm
Height	177 mm
Weight	0.55
Weight incl. packaging	0.65
Connection cross-section	1.5 mm <sup>2</sup>
Switching input	No
Emergency light blocking	No
Battery connection	Connector
Dimming function	No
Customs tariff number	94056120
EAN	4260682152473



## TECHNICAL DRAWING

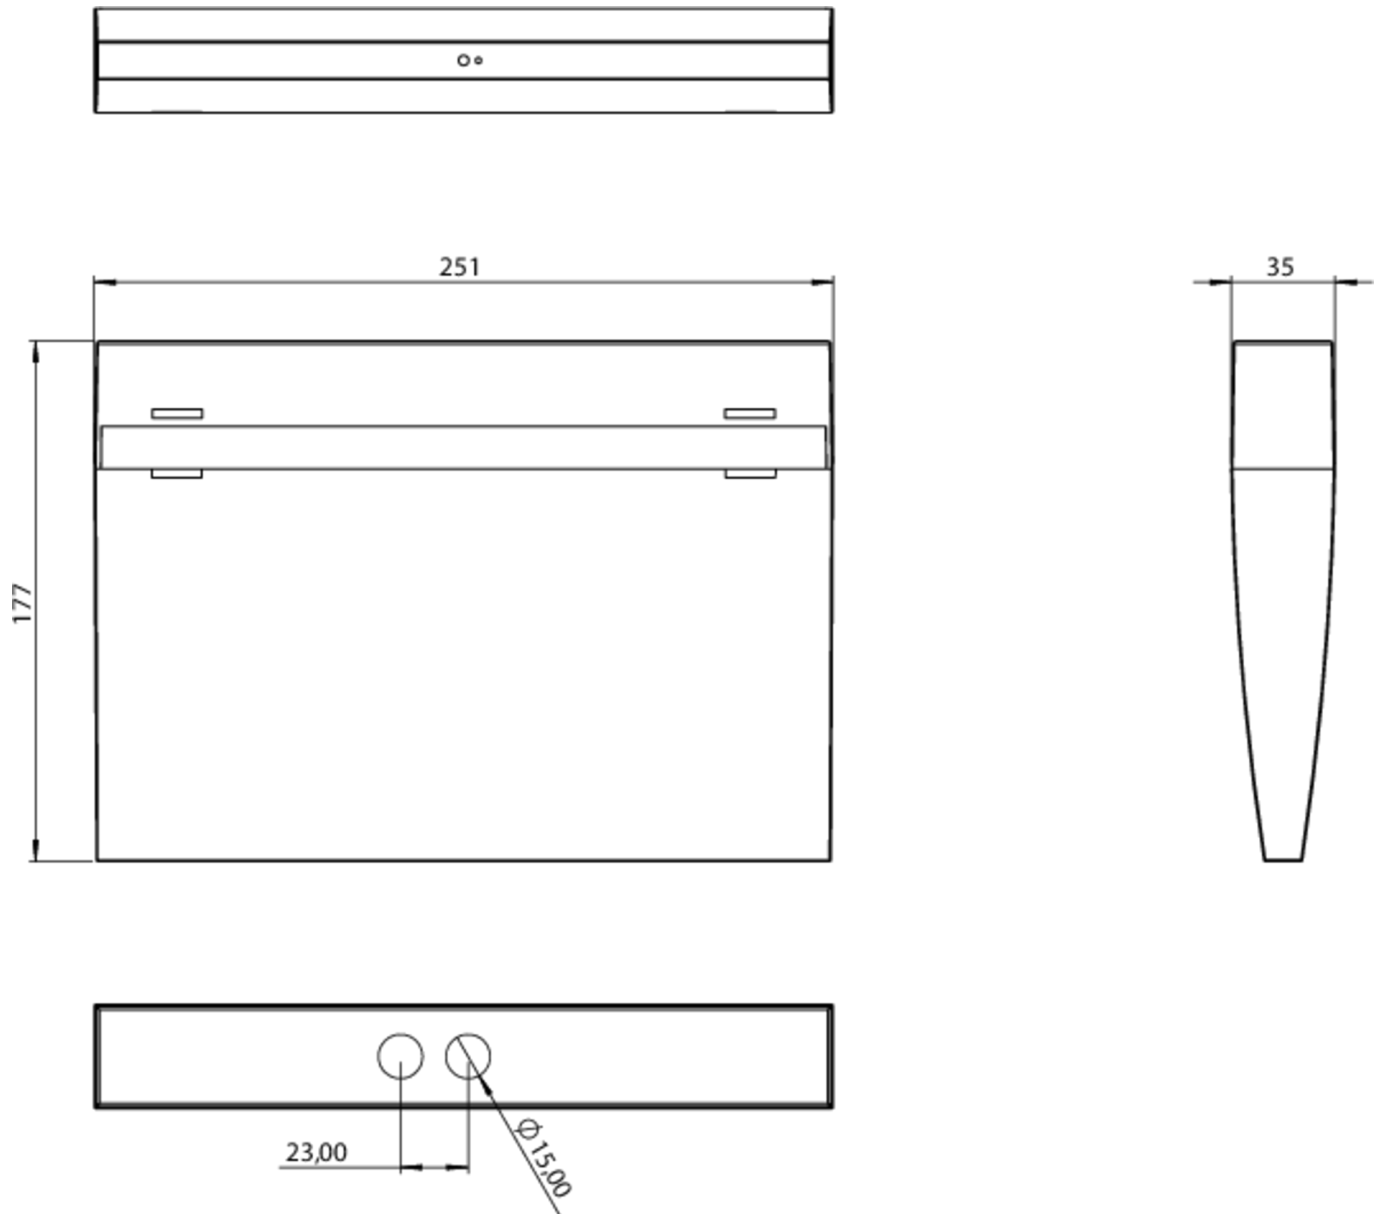

## ACCESSORY LIST

- DSA - Wire suspension
- AWKSU - Wall bracket
- 2PW-EB - Pendant
- BALLPLX-KMU - Wire mesh surround



## RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
KMUK403SC-SW		SelfControl (SC)	Single battery	RAL 9003	€	no	high	no	unlimited	itself

As of: 28.10.2024 - Subject to technical changes and errors.