



Art.-Nr: KSC013WL-COOL Exit sign, Safety luminaire Single Battery Ceiling mounting, Wireless Professional, 3 h, 22 m, IP54, Plastic, white

Innovative high-grade LED exit sign and emergency luminare for universal mounting. This luminaire using only 3 parts has a simple installation. Applicable for maintained or non-maintained operation mode. The tolless change and variable use of the pictograms provide planning security on site. Universal pictogram set (left, right, up, down) included.

The KSC luminaire is also designed for illumination of fire fighting and first aid facilities. The equipment of the first aid facilities is lighted by at least 5 lux according to EN 1838.

Signs according to EN 60598-1, EN 60598-2-22 and EN 1838 norms.

The COOL light is equipped with an external battery housing for installation in the building. The installation of the lamp can be done outdoors or in cold stores.







TECHNICAL DATA

Luminaire type	Exit sign, Safety luminaire
Mounting	Ceiling mounting
Recognition distance	22 m
Recognition distance	22111
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP54
Impact resistance (IK)	≥ 3
Certification	Waste disposal, CE, CNBOP, ENEC
Insulation class	2
Supply	Single Battery
Monitoring	Wireless Professional
Bridging time	3 h
Battery	LiFePO4 3,2 V / 3,3 Ah LiFePO4 - Lithium Iron Phosphate Battery
Operating mode	Standby circuit / permanent circuit






Input voltageAC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	- V
Power max.	5,3 W
Power DS	3,9 W
Power BS	1,5 W
Depth	34 mm
Width	250 mm
Height	174 mm
Weight	0.7
Weight incl. packaging	0.78
Connection cross-section	2.5 mm²
Switching input	Yes
Emergency light blocking	No
Battery connection	Connector
Dimming function	No
Luminous flux mains	190 lm
Luminous flux emergency	190 lm
Customs tariff number	94056120
Country of origin	DEUTSCHLAND
EAN	4260659562038





TECHNICAL DRAWING

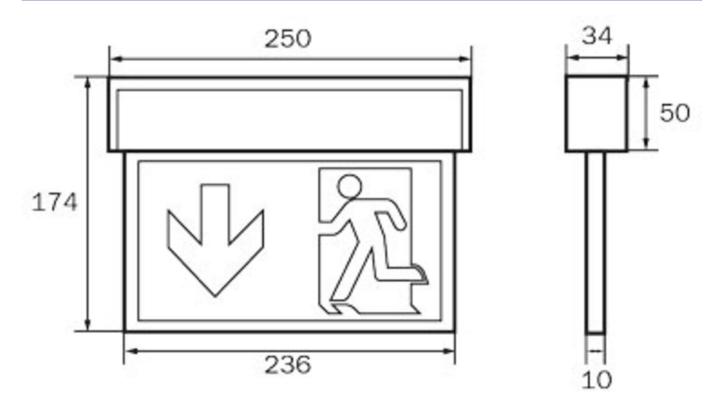

ACCESSORY LIST

DSA -

AWKSU -

2PW-EB -

KMBE -

BALLPLX-KMU -

KS4FIRE -

KS4HELP -





RELATED PRODUCTS

ArtNo.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. Iuminaires	Single luminaire monitoring
KSC013SC- SW	OPTIONAL STATE OF THE PARTY OF	SelfControl	Single battery		€	no	high	no	unlimited	itself
KSC013WB- SW	OTIONA TO THE PARTY OF THE PART	Wireless Basic	Single battery		€€	yes	low	yes	50	central
KSC013WL- SW	OPTOUL	Wireless Professional	Single battery		€€	yes	low	yes	1,000 per system	central
KSC013SC	OPTOUR STATE OF THE STATE OF TH	SelfControl	Single battery		€	no	high	no	unlimited	itself
KSC013SC- G10	OTIONA TO A T	SelfControl	Single battery		€	no	high	no	unlimited	itself





ArtNo.	lmage	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. Iuminaires	Single luminaire monitoring
KSC013WB	OTIONAL TO THE PARTY OF THE PAR	Wireless Basic	Single battery		€€	yes	low	yes	50	central
KSC013WL	OTIONAL TO A CONTROL OF THE CONTROL	Wireless Professional	Single battery		€€	yes	low	yes	1,000 per system	central
KSC013WL- G10	OTIONA IN TOTAL	Wireless Professional	Single battery		€€	yes	low	yes	1,000 per system	central
KSC013WL- PL	OTIONA IN	Wireless Professional	Single battery		€€	yes	low	yes	1,000 per system	central

As of: 29.06.2024 - Subject to technical changes and errors.