



Art.-Nr: KSU013WL **Exit sign Single Battery** Universal, Wireless Professional, 3 h, 22 m, IP54, Plastic, white

Innovative polycarbonate edge LED luminare for universal mounting. The installation using only 3 parts is kept simple.

Applicable for maintained or non-maintained operation mode. The toolless change and variable use of the pictograms provide planning security. Universal pictogram set (left, right, up, down) included. Exit sign according to EN 60598-1, EN 605982-22 and EN 1838 norms.







More information



TECHNICAL DATA

| Luminaire type | Exit sign |
|------------------------|--|
| Mounting | Universal |
| Recognition distance | 22 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Plastic |
| Housing color | white |
| Protection type (IP) | IP54 |
| Impact resistance (IK) | ≥ 3 |
| Certification | Waste disposal, CE, CNBOP, ENEC |
| Insulation class | 2 |
| Supply | Single Battery |
| Monitoring | Wireless Professional |
| Bridging time | 3 h |
| Battery | LiFePO4 3,2 V / 3,3 Ah LiFePO4 - Lithium Iron Phosphate Battery |
| Operating mode | Standby circuit / permanent circuit |
| Input voltageAC | 230 V |
| Input frequency | 50 / 60 Hz |
| Input voltage DC | - V |
| Power max. | 5,3 W |





| Power DS | 3,9 W |
|--------------------------|---------------|
| Power BS | 1,5 W |
| Depth | 34 mm |
| Width | 250 mm |
| Height | 174 mm |
| Weight | 0.7 |
| Weight incl. packaging | 0.78 |
| Connection cross-section | 2.5 mm² |
| Switching input | Yes |
| Emergency light blocking | No |
| Battery connection | Connector |
| Dimming function | No |
| Luminous flux mains | 190 lm |
| Luminous flux emergency | 190 lm |
| Customs tariff number | 94056120 |
| Country of origin | DEUTSCHLAND |
| EAN | 4260349824736 |






TECHNICAL DRAWING





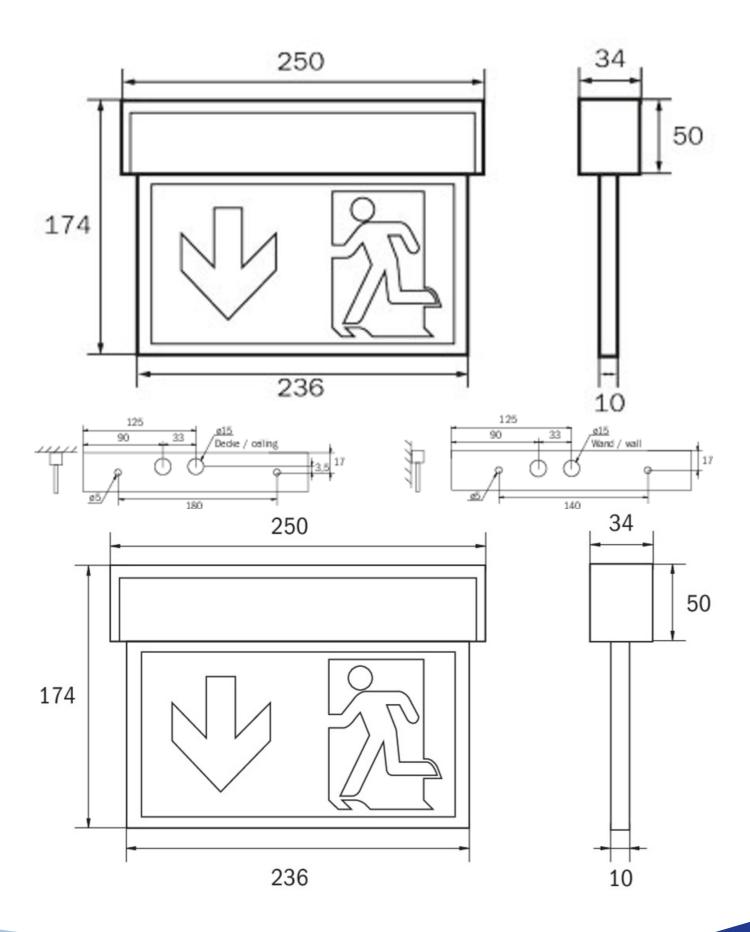





ACCESSORY LIST

| KM | IE-I | EΒ | - |
|----|------|----|---|
|----|------|----|---|

AWKSU -

2PW-EB -

KMBE -

BALLPLX-KMU -

DSA -

KSE-MB-WS-

KSE-MB-SI -





RELATED PRODUCTS

| ArtNo. | lmage | Monitoring | Supply | Color | Investment | Automatic log | Maintenance level | Remote maintenance | max. Iuminaires | Single luminaire monitoring |
|------------------|-------|-------------|-------------------|-------|------------|------------------|----------------------|-----------------------|--------------------|--------------------------------|
| KSU003 | | | | | | | | | | |
| KSU003BC | | Bus control | | | | | | | | |
| KSU003SC | | SelfControl | Single battery | | € | no | high | no | unlimited | itself |
| KSU013SC | | SelfControl | Single battery | | € | no | high | no | unlimited | itself |
| KSU013SC- G10 | | SelfControl | Single battery | | € | no | high | no | unlimited | itself |





| ArtNo. | lmage | Monitoring | Supply | Color | Investment | Automatic log | Maintenance level | Remote maintenance | max. Iuminaires | Single luminaire monitoring |
|------------------|-------|--------------------------|-------------------|-------|------------|------------------|----------------------|-----------------------|---------------------|--------------------------------|
| KSU013WB | | Wireless Basic | Single battery | | €€ | yes | low | yes | 50 | central |
| KSU013WL- G10 | | Wireless Professional | Single battery | | €€ | yes | low | yes | 1,000 per system | central |

As of: 02.07.2024 - Subject to technical changes and errors.