



**Art.-Nr: KSU519CC**

**Exit sign Central power supply**

**Universal, CoreCompact 24, Central power supply, 22 m,  
IP54, Plastic, white**

Innovative polycarbonate edge LED luminaire for universal mounting. The installation using only 3 parts is kept simple.

Applicable for maintained or non-maintained operation mode. The toolless change and variable use of the pictograms provide planning security. Universal pictogram set (left, right, up, down) included. Exit sign according to EN 60598-1, EN 605982-22 and EN 1838 norms.



More information



## TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Universal
Recognition distance	22 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP54
Impact resistance (IK)	≥ 3
Certification	Waste disposal, CE
Insulation class	3
Supply	Central power supply
Monitoring	CoreCompact 24
Bridging time	Central power supply
Operating mode	Standby circuit / permanent circuit
Input voltageAC	24 V
Power max.	2,1 W
Power DS	2,1 W
Power BS	0,4 W
Depth	34 mm
Width	250 mm



Height	174 mm
Weight	0.56
Weight incl. packaging	0.64
Connection cross-section	2.5 mm <sup>2</sup>
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Customs tariff number	94056120
Country of origin	DEUTSCHLAND
EAN	4260682157447



## TECHNICAL DRAWING

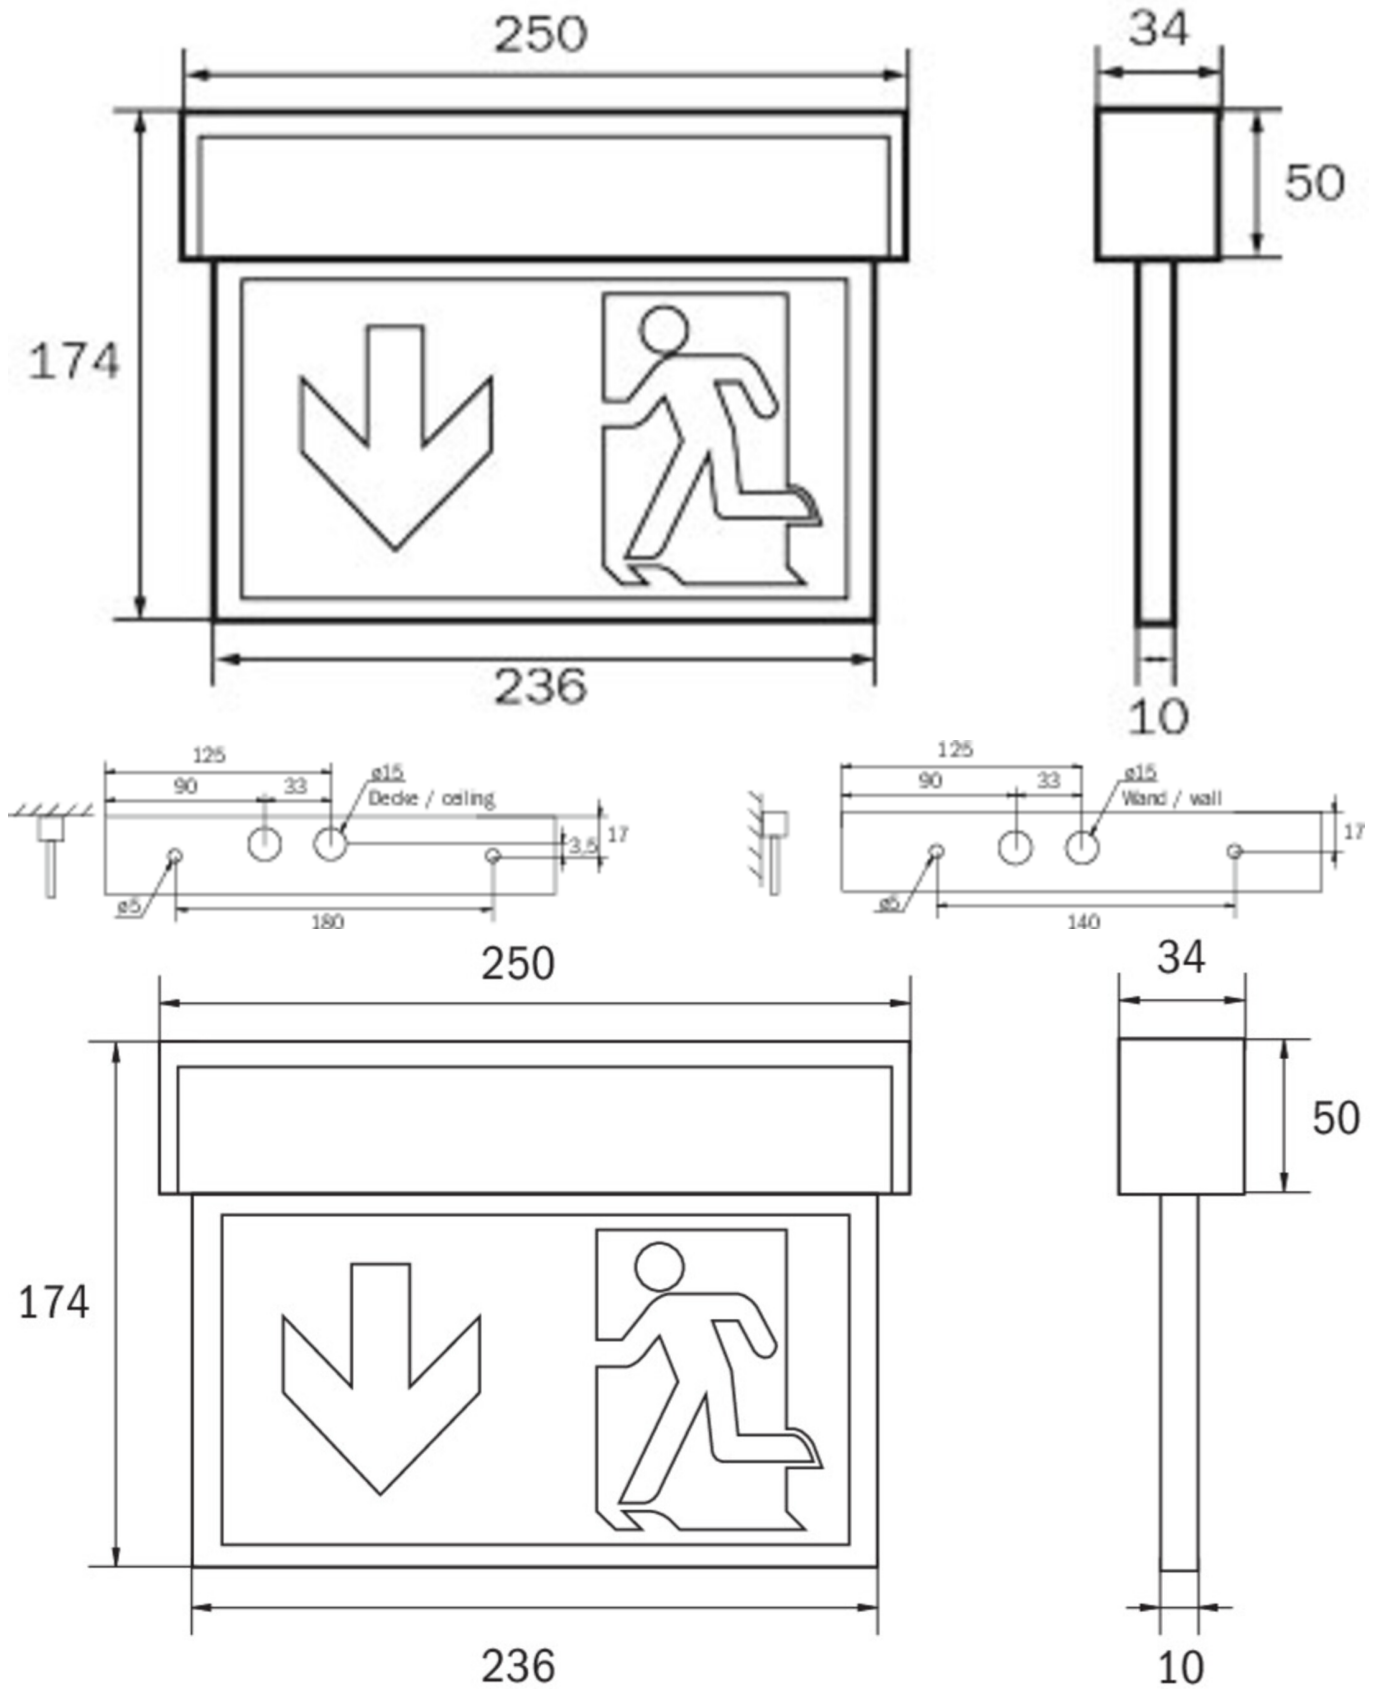




## ACCESSORY LIST

KME-EB -  
AWKSU -  
2PW-EB -  
KMBE -  
BALLPLX-KMU -  
DSA -  
KSE-MB-WS -  
KSE-MB-SI -

## RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
KSU019ML		ML	Central power supply		€€€	Yes	low	Yes	1,920 per system	central

As of: 02.07.2024 - Subject to technical changes and errors.